


Model 72917

4mm Banana Plug to 2mm Sheathed Banana Jack Adapter



Easy Adaptation from 2mm

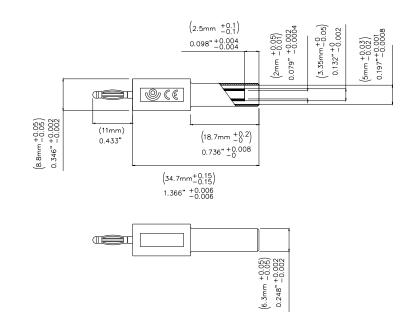

Features

to 4mm Test

- Accepts 2mm safety-sheathed banana plugs
- Converts to standard 4mm banana plug
- Rating: 33 Vac / 70 Vdc, 10A

Materials

- Insulation: Polyamide
- Plug body: Nickel-plated Brass

Ordering Information

Model:72916- Color Sold in packages of 10 pieces Available colors: Black (-0) or Red (-2)

Specifications

Max Current	Max. 10A
Max Voltage	33 V AC / 70 V DC
Temperature	-20° C + 80° C
Max Resistance	Less than 0.8 mΩ

Rating: *hands free testing* in controlled environment: 70Vrms max. For CE compliance: Not intended for handheld use at voltages above 33Vrms/70Vdc

USA:
Sales:
800-490-2361
Fax:
888-403-3360
Europe:
31-(0)
40
2675
150
International:
425-446-5500
e-mail:
technicalsupport@pomonatest.com
International:
425-446-5500
International:
 42

Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02^{\circ}$ (,51 mm), $.xxx = \pm .005^{\circ}$ (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.