

Pre-power amplifier for headphone stereos

BA3612AKV

The BA3612AKV is configured of a pre-amplifier and a headphone amplifier, and contains internal AMS, B.B, AVLS, and BEEP amplifier functions. Also, this IC can be used in combination with the BA3641FV to enable configuration of recording and playback sets.

● Applications

Portable cassette players

● Features

- 1) Low current consumption.
- 2) Internal AMS function.
- 3) Internal B.B function.
- 4) Internal AVLS function.
- 5) Internal BEEP amplifier.
- 6) Supports Dolby-B.
- 7) Supports OCL output.

● Absolute maximum ratings ($T_a = 25^\circ\text{C}$)

| Parameter | Symbol | Limits | Unit |
|-----------------------|-----------|----------|------|
| Power supply voltage | V_{DD} | 5.0 | V |
| Power dissipation | P_d | 400* | mW |
| Operating temperature | T_{opr} | -15~+60 | °C |
| Storage temperature | T_{stg} | -55~+125 | °C |

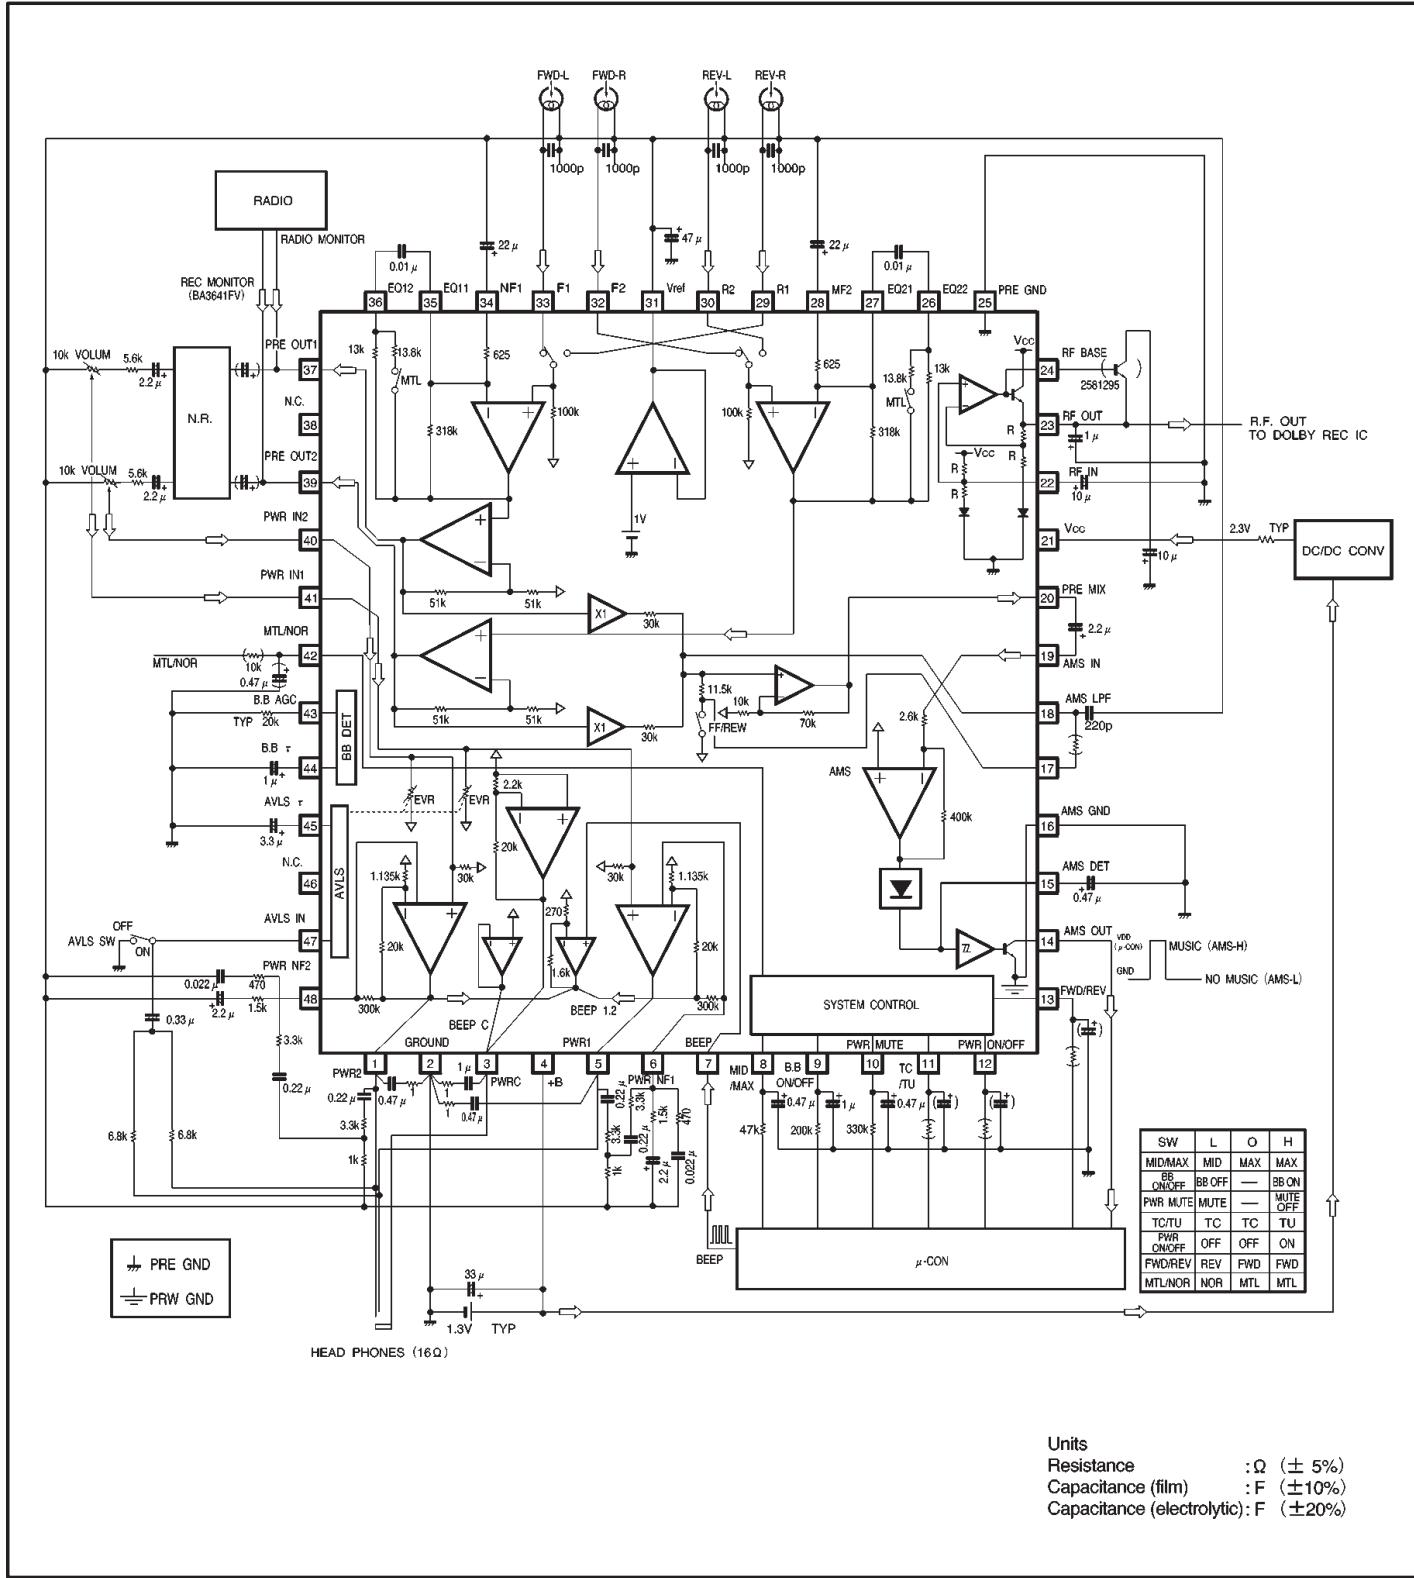
*Reduced by 4.0mW for each increase in T_a of 1°C over 25°C.
when mounted on a 70mm × 70mm × 1.6mm glass epoxy board.

● Recommended operating conditions ($T_a = 25^\circ\text{C}$)

| Parameter | Symbol | Limits | Unit |
|------------------------|----------|------------|------|
| Power supply voltage 1 | +B | 0.90~2.20 | V |
| Power supply voltage 2 | V_{CC} | 1.70~4.40* | V |

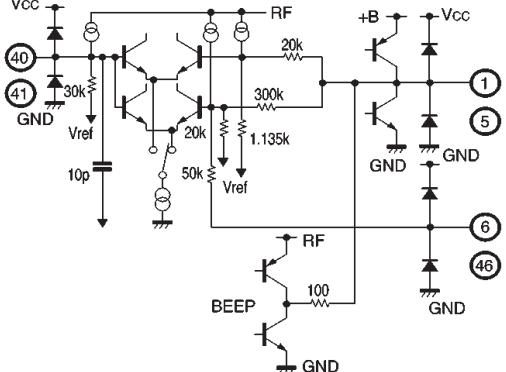

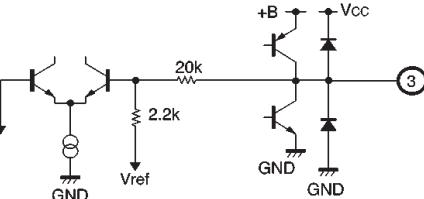

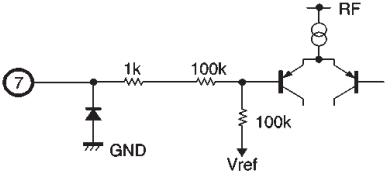
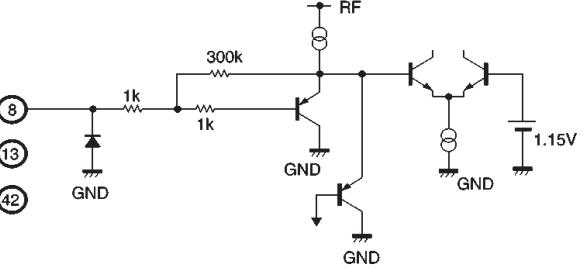
* In terms of basic operation, normally a high voltage of 0.4V higher than +B is applied for V_{CC} .
A relation of $V_{CC} = +B \times 2$ is recommended.

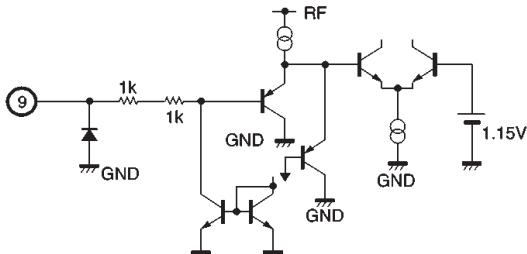
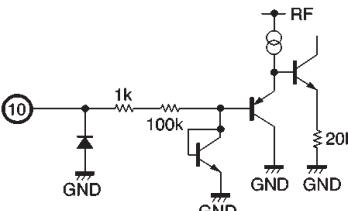
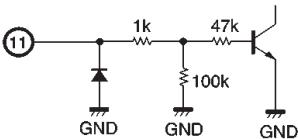
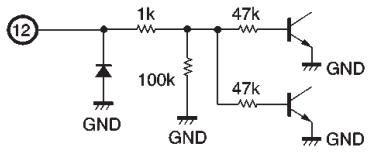
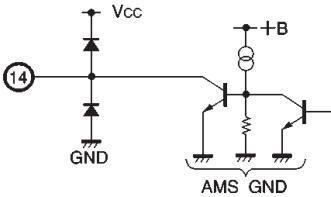
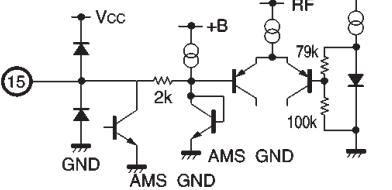
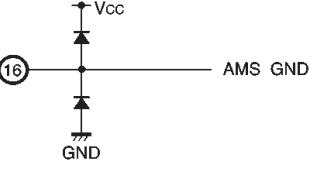
● Block diagram



●Pin descriptions

(The pin voltage of $V_{CC} = 2.3V$, $+B = 1.3V$ is the standard value for the measurement circuit under quiescent conditions.
Modes: PWR-ON, TC, FWD, NOR, Mute-OFF, B.B-OFF, AVLS-OFF)

| Pin No | Pin name | DC voltage | Equivalent circuit | Function |
|--------|--------------------|-------------------------------------|--|---|
| 1 | PWR2 | 0.6 |  | Power amplifier output BEEP amplifier output $Z_o \approx 1.2\Omega$ (power amplifier) |
| 5 | PWR1 | | | |
| 8 | PWR NF1 | 1.0 |  | NF pin when power amplifier is B.B |
| 48 | PWR NF2 | | | |
| 2 | GROUND | 0 |  | PWR GND (Sub) |
| 3 | PWR C | 0.6 |  | Power amplifier output (Center amplifier) $Z_o \approx 6.7\Omega$ |
| 4 | +B | 1.3 |  | Positive power supply |
| 7 | BEEP | 1.0 |  | BEEP input $Z_{in} \approx 200k\Omega$ |
| 8 | B.B MID / MAX | - (OPEN) 0.65 (MAX) 0.2 (MID) |  | For bass boost MID / MAX switching |
| 13 | Forward Reverse | - (OPEN) 0.65 (FWD) | | |
| 42 | Metal / Normal | - (OPEN) 0.2 (NOR) | | Pre-amplifier equalizer switching between Metal ($70\ \mu s$) and Normal ($120\ \mu s$) |

| Pin No. | Pin name | DC voltage | Equivalent circuit | Function |
|---------|----------------------------|--|---|---|
| 9 | B.B ON / OFF | — (OPEN) 0.3 (B.B-OFF) |  | Bass boost/normal switching |
| 10 | MUTE | — (OPEN) 0.65 (MUTE-OFF) |  | Mute ON/OFF switching $Z_{in}=100\text{k}\Omega$ |
| 11 | TC / TU | 0 (OPEN) 0.4 (TC) |  | Switching between TC (tape playback) and TU (radio monitor) $Z_{in}=100\text{k}\Omega$ |
| 12 | ST-BY (PWR ON / OFF) | 0 (OPEN) 0.77 (PWR-ON) |  | IC power supply ON/OFF $Z_{in}=100\text{k}\Omega$ |
| 14 | AMSGOUT | — (when curve exists) 0 (when no curve exists) |  | Mute detector output Non-mute: High Mute : Low |
| 15 | AMS DET | 0 (when curve exists) 0.65 (when no curve exists) |  | Mute detector comparator output smoothing pin |
| 16 | AMS GND | 0 * |  | Dedicated mute detector block GND |

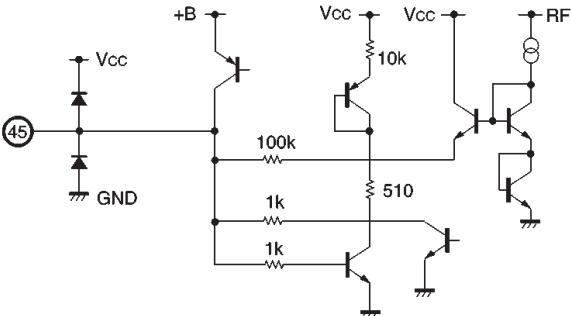
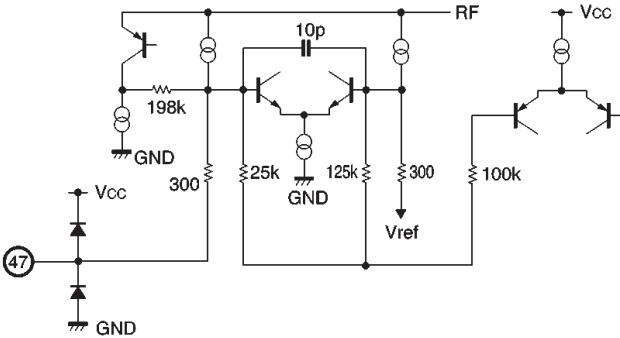
*When GND is connected outside IC

| Pin No. | Pin name | DC voltage | Equivalent circuit | Function |
|---------|----------|------------|--------------------|---|
| 17 | AMS LVL | 1.0 | | Threshold value adjustment pin for mute detector high-speed mode |
| 18 | AMS LPF | 1.0 | | Filter configuration pin to prevent malfunction from mute detector noise $Z_{in} \approx 1.5k\Omega$ (for playback) $Z_{in} \approx 7k\Omega$ (for fast forward / rewind) |
| 20 | PRE MIX | 1.0 | | Output pin which amplifies PRE OUT MIX output to 18 dB |
| 19 | AMS IN | 1.0 | | Phase detection amplifier input for mute detector block |
| 21 | Vcc | 2.3 | | Positive power supply (booster voltage) |
| 22 | RF IN | 1.2 | | Ripple filter amplifier input $Z_{in} \approx 44k\Omega$ |
| 23 | RF OUT | 2.0 | | Ripple filter amplifier output $Z_{in} \approx 56.4k\Omega$ |

| Pin No. | Pin name | DC voltage | Equivalent circuit | Function |
|---------|----------|------------|--------------------|---|
| 24 | RF Base | 1.3 | | For connection of external transistor for ripple filter amplifier. 2SB1295 or equivalent is recommended as external transistor. See diagram below for connection. |
| 25 | Pre GND | 0* | | Low-current GND in IC |
| 26 | EQ22 | 1.0 | | Pre-amplifier equalizer Connect capacitors between pins 26 and 27 and between pins 35 and 36. |
| 36 | EQ12 | 1.0 | | Pre-amplifier equalizer |
| 27 | EQ21 | 1.0 | | Pre-amplifier equalizer |
| 35 | EQ11 | 1.0 | | Pre-amplifier NF |
| 28 | NF2 | 1.0 | | Pre-amplifier NF |
| 34 | NF1 | 1.0 | | Pre-amplifier NF |
| 29 | R1 | 1.0 | | Pre-amplifier reverse-1 channel input |
| 30 | R2 | 1.0 | | Pre-amplifier reverse-2 channel input |
| 32 | F2 | 1.0 | | Pre-amplifier forward-2 channel input |
| 33 | F1 | 1.0 | | Pre-amplifier forward-1 channel input |
| 31 | Vref | 1.0 | | Vref amplifier output $Z_o \approx 10\Omega$ |

*When GND is connected outside IC

| Pin No. | Pin name | DC voltage | Equivalent circuit | Function |
|---------|------------|------------|--------------------|---|
| 37 | Pre OUT1 | 1.0 | | Pre-amplifier output $Z_o \approx 130\Omega$ (for TC) $Z_o = 100k\Omega$ (for TU) |
| 39 | Pre OUT2 | 1.0 | | |
| 40 | PWR IN2 | 1.0 | | Power amplifier input $Z_{in} = 30k\Omega$ |
| 41 | PWR IN1 | 1.0 | | |
| 43 | B.B AGC | — | | Controls AGC level during bass boost |
| 44 | B.B τ | 0 | | AGC phase detection output smoothing pin during bass boost |

| Pin No. | Pin name | DC voltage | Equivalent circuit | Function |
|---------|-------------|------------|--|---|
| 45 | AVLS τ | 0 |  | Detector output smoothing pin during AVLS |
| 47 | AVLS IN | 1.0 |  | AVLS input AVLS ON / OFF switching |

●Electrical characteristics

(unless otherwise noted, $+B = 1.3V$, $V_{cc} = 2.3V$, $f = 1kHz$, $PreOutR_L = 5k\Omega$, $PWROutR_L = 16\Omega$ (OCL), $T_a = 25^\circ C$, and measurement condition pertaining to ripple: V_{cc} and $+B$ are common-mode input)

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Conditions |
|------------------------------|------------------|-------|-------|-------|----------|---|
| ⟨Total⟩ | | | | | | |
| Quiescent current | Icc1B | — | 3.0 | 4.5 | mA | Power On, PWR-Mute OFF, TC B.B-OFF, AVLS-OFF |
| | Icc1V | — | 4.9 | 6.0 | | |
| | Icc2B | — | 0.3 | 0.8 | | Power On, PWR-Mute ON, TC B.B-OFF, AVLS-OFF |
| | Icc2V | — | 4.1 | 5.5 | | |
| | Icc3B | — | 3.0 | 4.5 | mA | Power On, PWR-Mute OFF, Tuner B.B-OFF, AVLS-OFF |
| | Icc3V | — | 4.2 | 5.5 | | |
| | Icc4B | — | 0 | 5.0 | \mu A | Power OFF, PWR-Mute OFF, TC B.B-OFF, AVLS-OFF |
| | Icc4V | — | 0 | 5.0 | | |
| Current consumption at 0.5mW | Icc5B | — | 14.0 | 15.5 | mA | PWR input=−45.8dBV |
| | Icc5V | — | 4.9 | 6.0 | | OCL, TC, B.B-OFF, AVLS-OFF |
| ⟨Pre block⟩ | | | | | | |
| Closed-loop voltage gain | Gvc1 | 34.6 | 35.6 | 36.6 | dB | $V_o = -20.0\text{dBv}$ |
| Max. output voltage | Vom1 | 185 | 250 | — | mV | $+B = 0.9V$, $V_{cc} = 1.7V$, THD=1% |
| Total harmonic distortion | THD1 | — | 0.12 | 0.5 | % | $+B = 0.9V$, $V_{cc} = 1.7V$, $V_o = -20.0\text{dBv}$ |
| Input reduced noise voltage | V _{NIN} | — | 1.25 | 2.0 | \mu Vrms | R _g =1.0k\Omega, DIN-AUDIO Converted using NAB 1kHz gain |
| Crosstalk between channels | CTc1 | 65 | — | — | dB | Do=−20.0dBv, R _g =1k\Omega 1kHz BPF+DIN-AUDIO |
| Crosstalk between F/R | CTfr | 68 | — | — | dB | |
| AMS threshold | Mute - OFF | amsP | −69.5 | −67.0 | dBv | Cams=2.2 \mu F, Rams=0 \Omega, TU-ON PRE OUT input value, V _{AMSOUT} >0.3V |
| | Mute - ON | amsF | −62.5 | −60.0 | | |
| Ripple leak (Pre+R.F.) | RL1 | — | — | −76 | dBv | $+B = 1.0V + (-26\text{dBv})$, $f = 130\text{Hz}$ $V_{cc} = 2.0V + (-20\text{dBv})$, $f = 130\text{Hz}$ Irf=−1.5mA 130Hz BPF+DIN-AUDIO |
| Pre-muting attenuation | Mute1 | 75 | — | — | dB | $V_{cc} = 1.7V$, $R_g = 1k\Omega$, $V_o = -20\text{dBv}$ 1kHz BPF+DIN-AUDIO |
| Metal-f characteristic | Δ GvM | −5.44 | −4.54 | −3.64 | dB | Deviation at 10kHz, $V_o = -20\text{dBv}$ |

◎Not designed for radiation resistance.

(unless otherwise noted, $+B = 1.3V$, $V_{CC} = 2.3V$, $f = 1kHz$, $PreOutR_L = 5k\Omega$, $PWROutR_L = 16\Omega$ (OCL), $T_a = 25^\circ C$, and measurement condition pertaining to ripple: V_{CC} and $+B$ are common-mode input)

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Conditions |
|---------------------------------------|-----------------|------|-------|-------|---------------|--|
| ⟨Power block⟩ | | | | | | |
| Closed-loop voltage gain | Gvc2 | 22.5 | 24.0 | 25.5 | dB | $V_o = -20.0dBv$ |
| Interchannel balance | CB | -1.5 | 0.0 | 1.5 | | |
| Output power | Po | 6.5 | 10.0 | — | mW | $+B = 1.5V$, THD = 10%, $R_L = 16\Omega$ |
| Total harmonic distortion 1 | THDp1 | — | 0.3 | 0.9 | % | $Po = 1mW$, 400~30kHz BPF |
| Total harmonic distortion 2 | THDp2 | — | 0.4 | 1.0 | % | $Po = 1mW$, $f = 10kHz$, 30kHz LPF |
| Output noise voltage | V _{NO} | — | 19.0 | 32.0 | μV_{rms} | $R_g = 600\Omega$, DIN-AUDIO |
| Crosstalk | CTc2 | 28.0 | — | — | dB | $R_g = 3.3\Omega$, $V_o = -40dBv$ 1kHz BPF + DIN-AUDIO |
| Ripple leak | RL2 | — | -92.5 | -87.0 | dBv | $+B = 1.0V + (-26dBv)$, $f = 130Hz$ $V_{CC} = 2.0V + (-20dBv)$, $f = 130Hz$ $R_g = 600\Omega$, 130Hz BPF, $I_{rf} = -1.5mA$ |
| Muting attenuation | Mute2 | 80 | — | — | dB | $f = 1kHz$, $V_o = -20dBv$ B.B-MAX, 1kHz BPF + DIN-AUDIO |
| Input resistance | Z _{IN} | 25 | 30 | 35 | kΩ | — |
| DC offset voltage | Δ Vo | -25 | 0.0 | 15 | mV | A/B-Amp in relation to C-Amp |
| ⟨Ripple filter⟩ | | | | | | |
| Ripple rejection | RR | 26.0 | — | — | dB | $V_{CC} = 2.0V + (-20dBv)$, $f = 130Hz$ 130Hz BPF + DIN-AUDIO, $I_{rf} = -1.5mA$ |
| DC output voltage | V _r | 1.42 | 1.50 | — | V | $V_{CC} = 1.7V$, $I_{rf} = 0mA$ |
| ⟨Boost⟩ | | | | | | |
| Boost ON / OFF voltage gain deviation | Δ B.B | -2.0 | 0.0 | 1.0 | dB | $f = 1kHz$, $V_{IN} = -60dBv$ |
| Boost amount 1* | BG1 | 17.5 | 20.0 | — | dB | $f = 50Hz$, $V_{IN} = -60dBv$, B.B-MAX |
| Boost amount 2** | BG2 | 3.7 | 5.2 | 6.7 | dB | $f = 10kHz$, $V_{IN} = -60dBv$, B.B-MAX |
| Boost amount 3* | BG3 | 5.0 | 6.5 | 8.0 | dB | $f = 50Hz$, $V_{IN} = -60dBv$, B.B-MID |
| Total harmonic distortion | THDB | — | 0.3 | 1.0 | % | $f = 1kHz$, $V_{IN} = -40dBv$, 30kHz LPF |
| Ripple leak | RLB | — | -82.5 | -75.0 | dBv | $+B = 1.0V + (-26dBv)$, $f = 130Hz$ $V_{CC} = 2.0V + (-20dBv)$, $f = 130Hz$ $R_g = 600\Omega$, 130Hz BPF + DIN-AUDIO |

* This is the amount of boost in relation to a gain of 1kHz, when the secondary LPF (low-pass filter) is attached as specified by the measurement circuit example.
** This is the amount of boost in relation to a gain of 1kHz, when the HPF (high-pass filter) is attached as specified by the measurement circuit example.

(unless otherwise noted, $+B = 1.3V$, $V_{CC} = 2.3V$, $f = 1kHz$, $PreOutR_L = 5k\Omega$ (OCL), $PWROutR_L = 16\Omega$ (OCL), $T_a = 25^\circ C$)

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Conditions |
|------------------------|------------------|-------|-------|-------|------|---|
| ⟨AVLS⟩ | | | | | | |
| AVLS suppression level | AV _O | -44.0 | -41.0 | -40.0 | dBv | $V_{IN} = -30dBv$ $R_{av} = 6.8k\Omega$, $R_L = 16\Omega$ |
| AVLS start input level | AV _{IN} | -67.8 | -64.8 | -61.8 | dBv | $V_{IN} = -64.8dBv$ $R_{av} = 6.8k\Omega$, $R_L = 16\Omega$ |
| AVLS distortion | AVTHD | — | 0.4 | 1.5 | % | $V_{IN} = -20dBv$, B.B-OFF $R_{av} = 6.8k\Omega$, $R_L = 16\Omega$ |
| BEEP output level | VBeep | -61 | -58 | -55 | dBv | $R_L = 16\Omega$, $I_{Beep} = 5\mu A_{o-p}$ $f = 1kHz$ |

Conditions applied to control pins

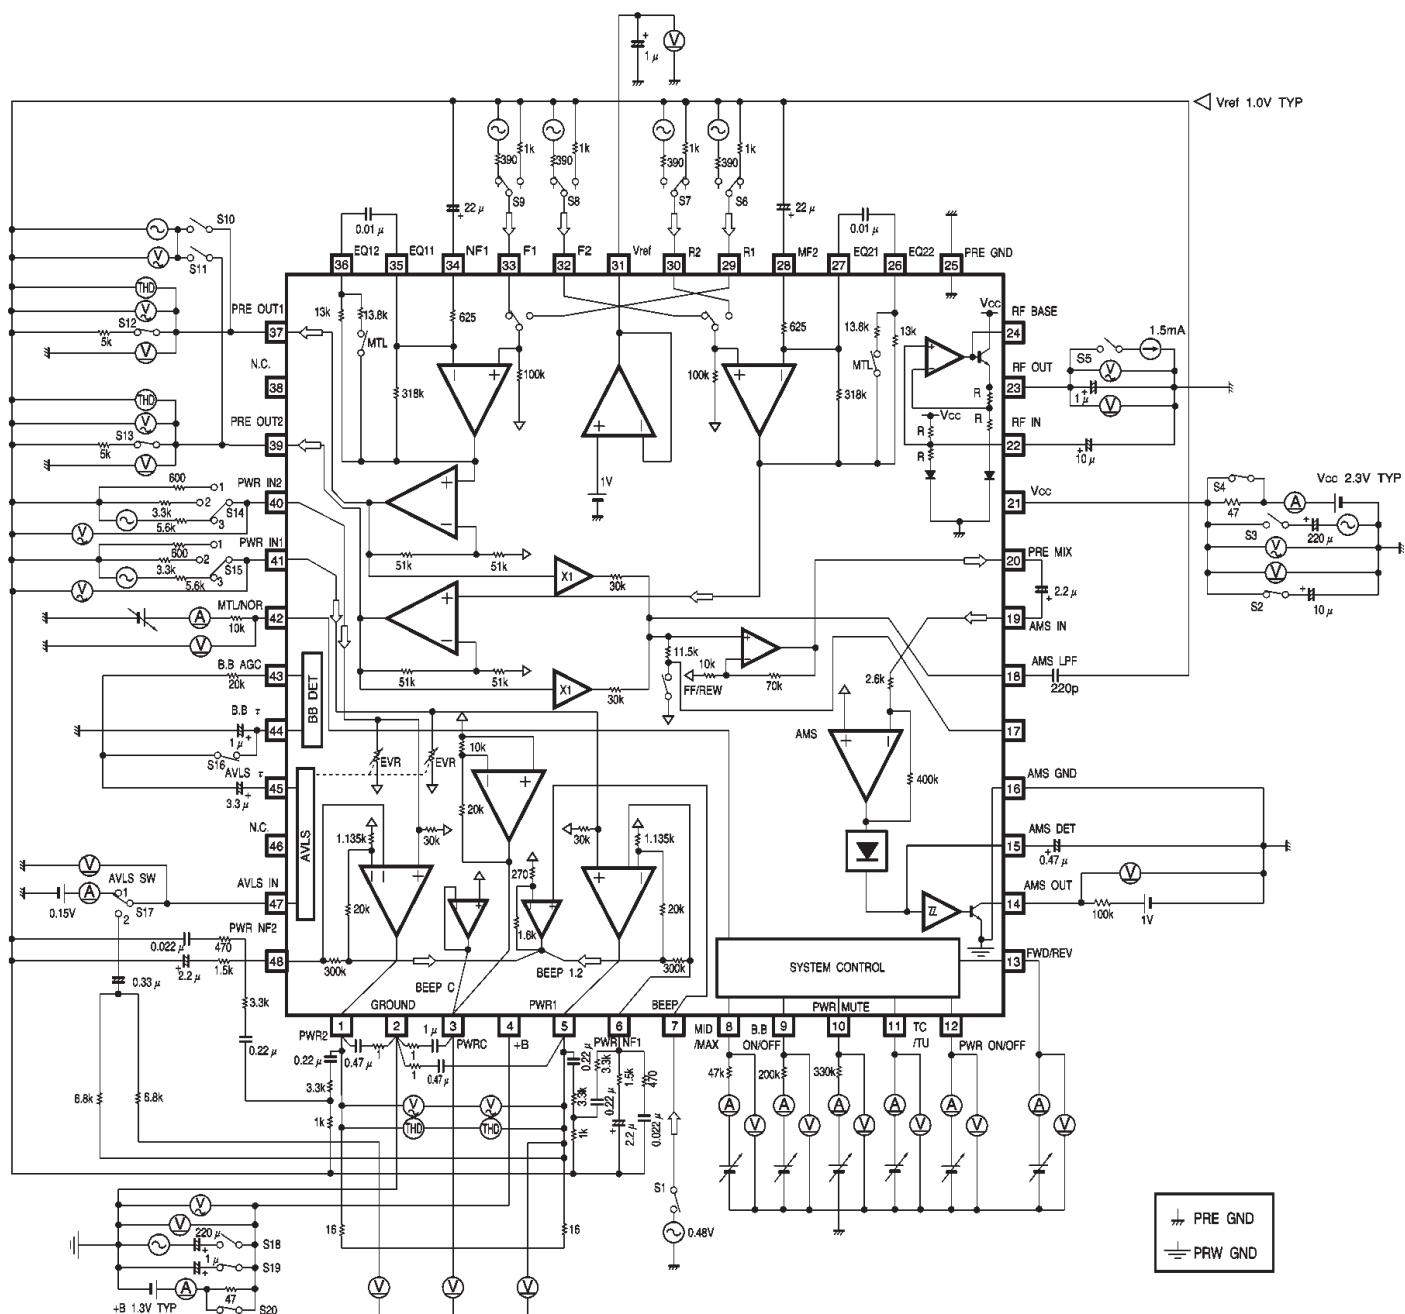
(Unless otherwise noted, +B = 0.9V, V_{CC} = 1.7V, f = 1kHz, PreOutR_L = 5kΩ, PWROutR_L = 16Ω (OCL), Ta = 25°C)

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Conditions |
|----------------------------|--------------------|------|------|------|------|----------------------------------|
| <Pre block> | | | | | | |
| Tuner / TC | Tuner | SW1 | 0.77 | — | 7.0 | V HIGH |
| | TC | | —0.2 | — | 0.4 | V LOW / OPEN |
| | I _{SWIN} | | 4 | 9 | 15 | μA V11pin=0.77V |
| FWD / REV | FWD | SW2 | 0.65 | — | 7.0 | V HIGH / OPEN |
| | REV | | —0.2 | — | 0.2 | V LOW |
| | I _{SWOUT} | | 0.5 | 2.3 | 3.5 | μA V13pin=0.2V |
| MTL / NOR | MTL | SW3 | 0.7 | — | 7.0 | V HIGH / OPEN |
| | NOR | | —0.2 | — | 0.2 | V LOW |
| | I _{SWOUT} | | 0.5 | 2.3 | 3.5 | μA V42pin=0.2V |
| <Power block> | | | | | | |
| PWR ON / OFF | ON | SW4 | 0.77 | — | 7.0 | V HIGH |
| | OFF | | —0.2 | — | 0.4 | V LOW / OPEN |
| | I _{SWIN} | | 5 | 11 | 17 | μA V12pin=0.77V |
| MUTE ON / OFF | OFF | SW5 | 0.65 | — | 7.0 | V HIGH |
| | ON | | —0.2 | — | 0.2 | V LOW |
| | I _{SWIN} | | — | 0.25 | 1.0 | μA V10pin=0.65V |
| B.B ON / OFF | ON | SW6 | 0.75 | — | 7.0 | V HIGH |
| | OFF | | —0.2 | — | 0.3 | V LOW |
| | I _{SWOUT} | | — | 0.0 | 1.0 | μA V9pin=0.3V |
| | I _{SWIN1} | | — | 0.0 | 1.0 | μA V9pin=1.5V, V10pin=0.6V |
| | I _{SWIN2} | | 3 | 7 | 11 | μA V10pin=0V |
| AVLS ON / OFF | ON | SW7 | — | — | — | V PWR1 and PWR2 signals input |
| | OFF | | —0.2 | — | 0.2 | V LOW |
| | I _{SWOUT} | | 5 | 25 | 30 | μA V47pin=0.2V |
| B.B MAX / MID | MAX | SW8 | 0.65 | — | 7.0 | V HIGH / OPEN |
| | MID | | —0.2 | — | 0.2 | V LOW |
| | I _{SWOUT} | | 0.5 | 2.3 | 3.5 | μA V8pin=0.2V |

I_{SWIN} : Indicates current flowing to the interior of the IC.

I_{SWOUT}: Indicates current flowing to the exterior of the IC.

● Measurement circuit



Units
 Resistance : Ω (±1%)
 Capacitance (film) : F (±1%)
 Capacitance (electrolytic) : F (±5%)

Fig.1

● Electrical characteristic curves

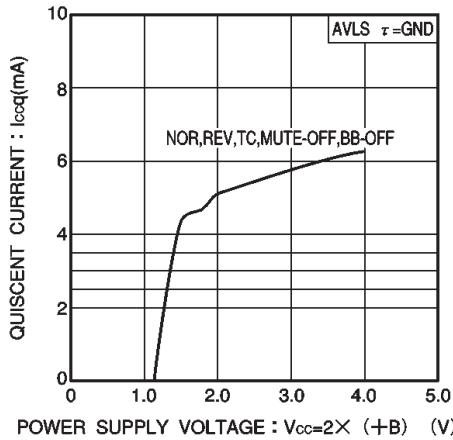


Fig.2 Quiescent current vs. power supply voltage

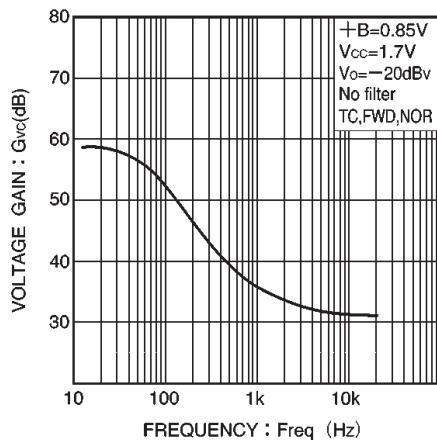


Fig.3 PRE gain vs. frequency

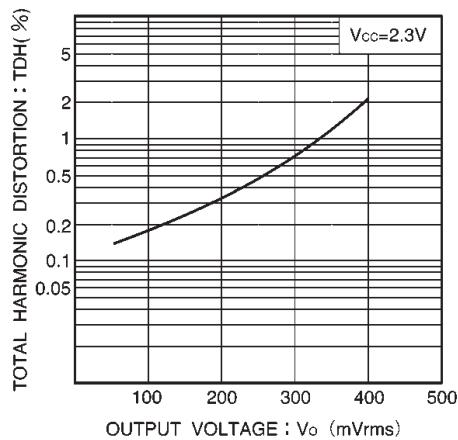


Fig.4 Total harmonic distortion

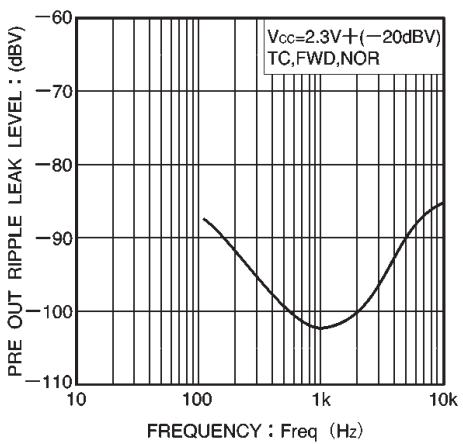


Fig.5 PRE ripple leak characteristics

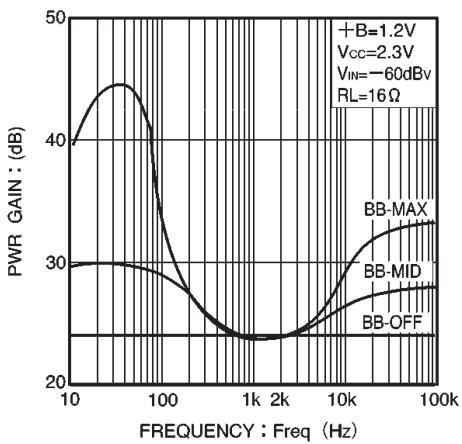


Fig.6 PWR gain vs. frequency

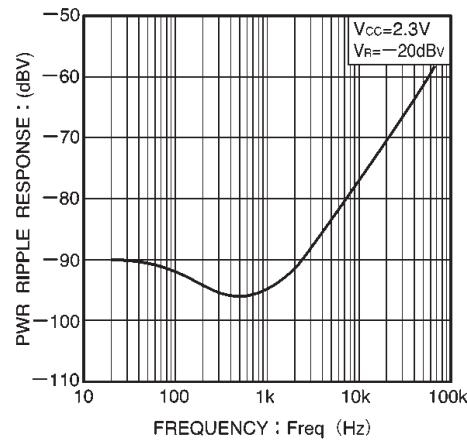


Fig.7 PWR ripple leak characteristics

● External dimensions (Units: mm)

