

AN8000MS

Ripple filter IC for cellular phones

■ Overview


The AN8000MS is a ripple filter IC that rejects the ripple component superimposed on the regulator output. Use for the VCO bias of cellular phones improves C/N and S/N and makes the high-quality telephone communication possible. Furthermore, by decreasing the difference between I/O voltages, drop in the power supply voltage of VCO is reduced.

■ Features


- The I/O drop voltage is reduced to 0.3 V (A PNP transistor is used for the pass transistor)
- The mounting area is reduced by adopting the mini-type 6-pin package

■ Applications

- Cellular phones and others

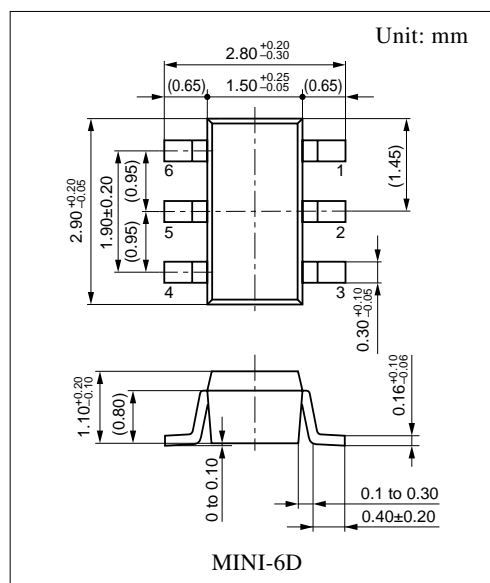

■ Block Diagram

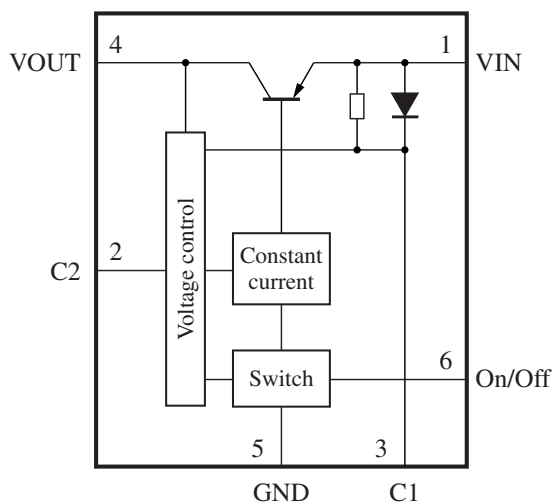

■ Pin Descriptions

Pin No.	Symbol	Description
1	V _{IN}	Input pin
2	C2	Capacitor connection pin 2
3	C1	Capacitor connection pin 1
4	V _{OUT}	Output pin
5	GND	Ground pin
6	On/Off	Control pin

■ Absolute Maximum Ratings

Parameter	Symbol	Rating	Unit
Supply voltage	V _{IN}	7.0	V
Supply current	I _{IN}	20	mA
Output current	I _O	-15	mA
Allowable application voltage for on/off pin	V _{ON/OFF}	V _{IN}	V
Allowable maximum capacitance for C1 pin	C ₁	100	μF
Allowable maximum capacitance for C2 pin	C ₂	10	μF
Power dissipation *2	P _D	60	mW
Operating ambient temperature *1	T _{opr}	-25 to +75	°C
Storage temperature *1	T _{stg}	-40 to +125	°C

Note) *1: Except for the operating ambient temperature and storage temperature, all ratings are for T_a = 25°C.

*2: The power dissipation shown is the value for T_a = 75°C.

■ Recommended Operating Range

Parameter	Symbol	Range	Unit
Supply voltage	V _{CC}	2.5 to 6.5	V

■ Electrical Characteristics at T_a = 25°C


Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Output voltage 1	V _{O1}	V _{IN} = 2.5 V, I _{OUT} = -1 μA	2.10	2.27	—	V
Output voltage 2	V _{O2}	V _{IN} = 2.5 V, I _{OUT} = -15 mA	1.95	2.14	—	V
Output voltage 3	V _{O3}	V _{IN} = 3.0 V, I _{OUT} = -1 μA	2.60	2.79	—	V
Output voltage 4	V _{O4}	V _{IN} = 3.0 V, I _{OUT} = -15 mA	2.60	2.66	—	V
Output voltage 5	V _{O5}	V _{IN} = 7.0 V, I _{OUT} = -1 μA	6.70	6.87	—	V
Output voltage 6	V _{O6}	V _{IN} = 7.0 V, I _{OUT} = -15 mA	6.60	6.74	—	V

■ Electrical Characteristics at $T_a = 25^\circ\text{C}$ (continued)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Consumption current 1	I_{O1}	$V_{IN} = 2.5\text{ V}, I_{OUT} = -1\ \mu\text{A}$	-420	-322	—	μA
Consumption current 2	I_{O2}	$V_{IN} = 2.5\text{ V}, I_{OUT} = -15\text{ mA}$	-400	-304	—	μA
Consumption current 3	I_{O3}	$V_{IN} = 3.0\text{ V}, I_{OUT} = -1\ \mu\text{A}$	-600	-490	—	μA
Consumption current 4	I_{O4}	$V_{IN} = 3.0\text{ V}, I_{OUT} = -15\text{ mA}$	-550	-450	—	μA
Consumption current 5	I_{O5}	$V_{IN} = 7.0\text{ V}, I_{OUT} = -1\ \mu\text{A}$	-2.0	-1.5	—	mA
Consumption current 6	I_{O6}	$V_{IN} = 7.0\text{ V}, I_{OUT} = -15\text{ mA}$	-2.0	-1.7	—	mA
Load regulation 1	REG_{L1}	$V_{IN} = 2.5\text{ V}, I_{OUT} = -1\ \mu\text{A}$ to -15 mA	0	134	200	mV
Load regulation 2	REG_{L2}	$V_{IN} = 3.0\text{ V}, I_{OUT} = -1\ \mu\text{A}$ to -15 mA	0	122	200	mV
Load regulation 3	REG_{L3}	$V_{IN} = 7.0\text{ V}, I_{OUT} = -1\ \mu\text{A}$ to -15 mA	0	126	200	mV
Consumption current against load change 1	$I_{\text{REG}1}$	$V_{IN} = 2.5\text{ V}, I_{OUT} = -1\ \mu\text{A}$ to -15 mA	-100	-18	100	μA
Consumption current against load change 2	$I_{\text{REG}2}$	$V_{IN} = 3.0\text{ V}, I_{OUT} = -1\ \mu\text{A}$ to -15 mA	-100	-18	100	μA
Consumption current against load change 3	$I_{\text{REG}3}$	$V_{IN} = 7.0\text{ V}, I_{OUT} = -1\ \mu\text{A}$ to -15 mA	-150	-5	150	μA
Ripple rejection ratio 1	RR_1	$V_{IN} = 3\text{ V} \pm 0.15\text{ V}, I_{OUT} = -15\text{ mA},$ $f = 1\text{ kHz}$	20	23	—	dB
Ripple rejection ratio 2	RR_2	$V_{IN} = 3\text{ V} \pm 0.15\text{ V}, I_{OUT} = -15\text{ mA},$ $f = 25\text{ kHz}$	35	40	—	dB
Ripple rejection ratio 3	RR_3	$V_{IN} = 3\text{ V} \pm 0.15\text{ V}, I_{OUT} = -15\text{ mA},$ $f = 100\text{ kHz}$	30	36	—	dB




■ Application Notes

1. $P_D - T_a$ curves of MINI-6D package

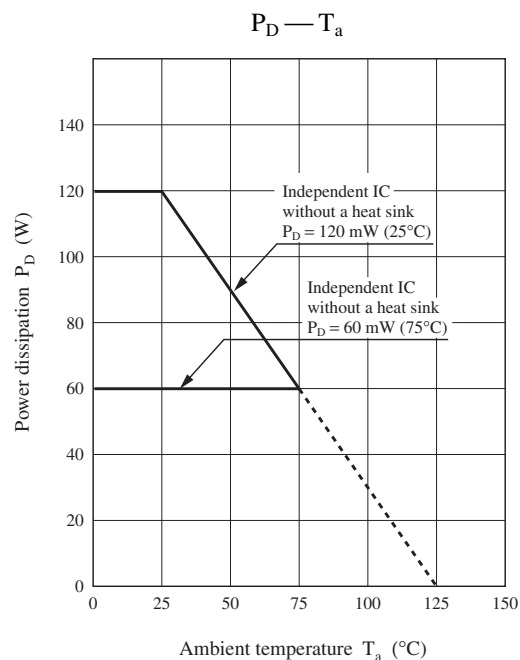



■ Application Notes (continued)

2. Main characteristics

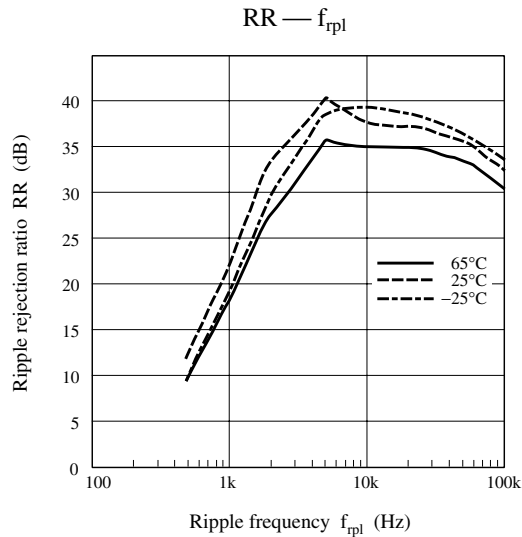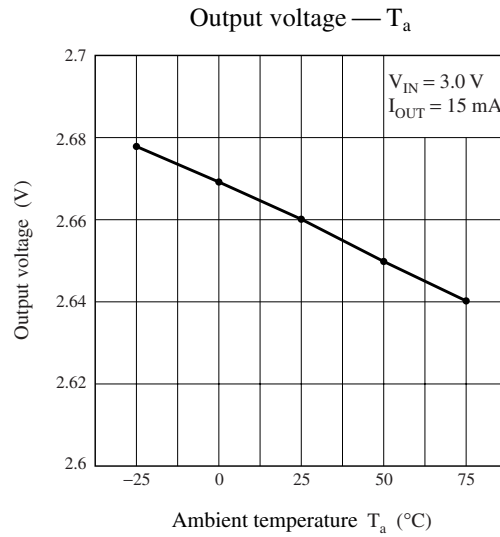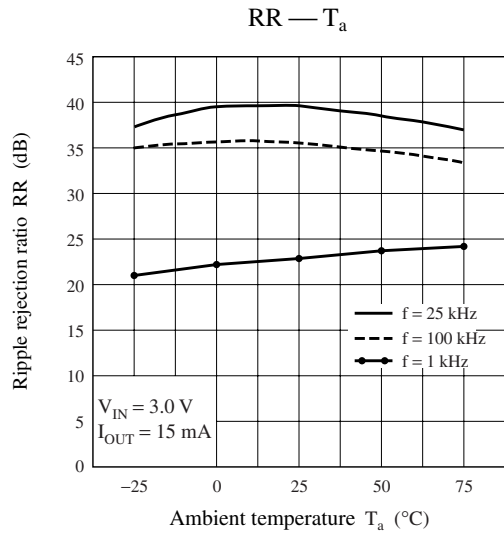

3. Transient response




1) Test circuit and conditions

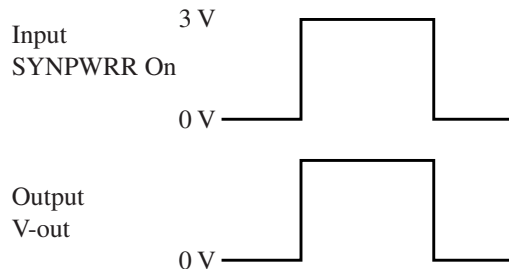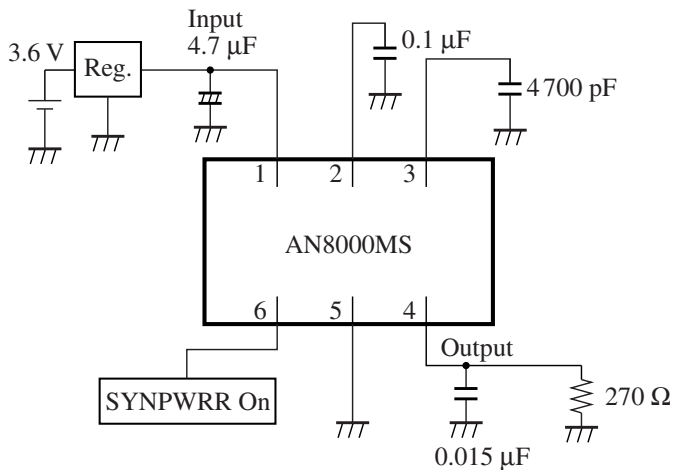




■ Application Notes (continued)
 3. Transient response (continued)

2) Transient characteristics (SYNPWR, V_{OUT})




$T_a = -25^\circ\text{C}$

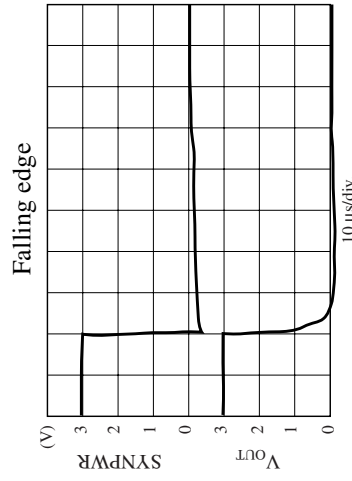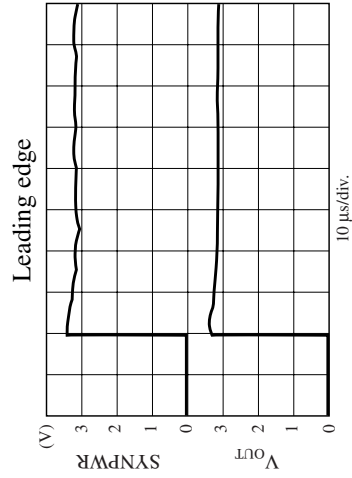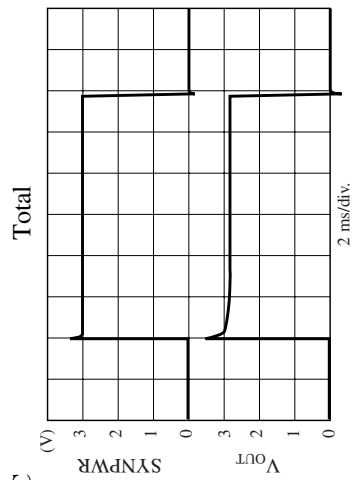

$T_a = 25^\circ\text{C}$

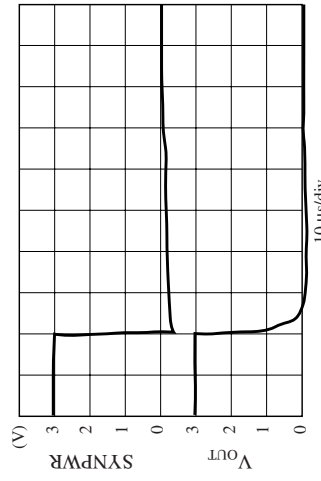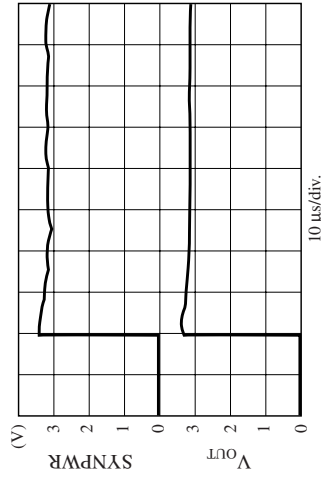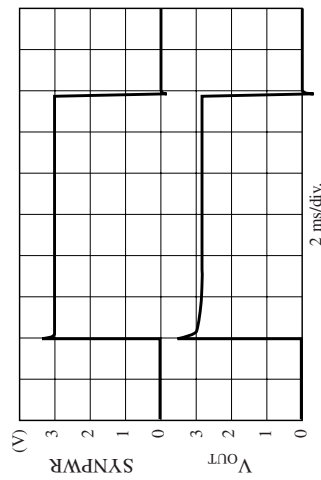


$T_a = 65^\circ\text{C}$

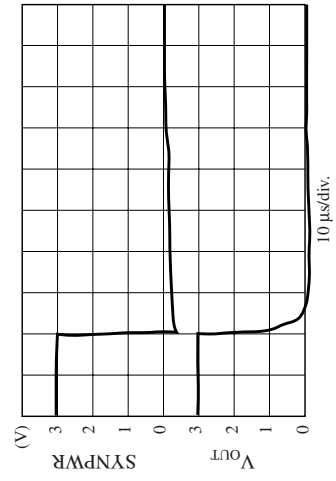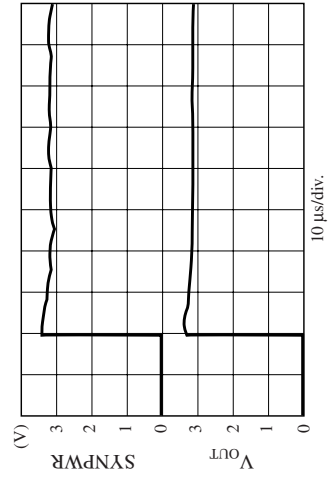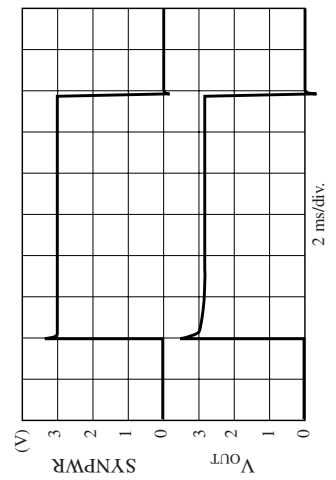


■ Application Circuit Examples

1. Application system example

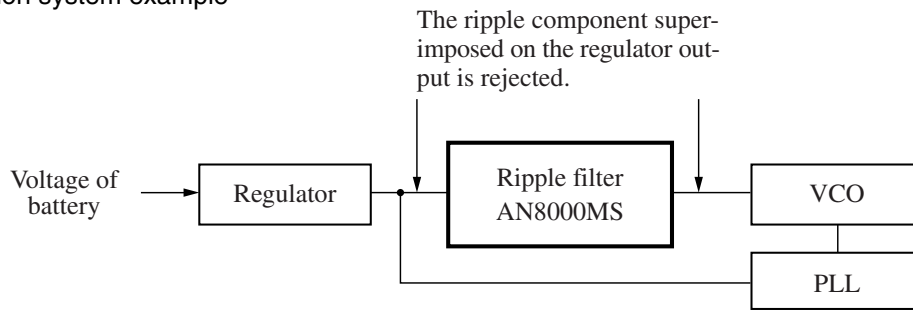

2. Application circuit example

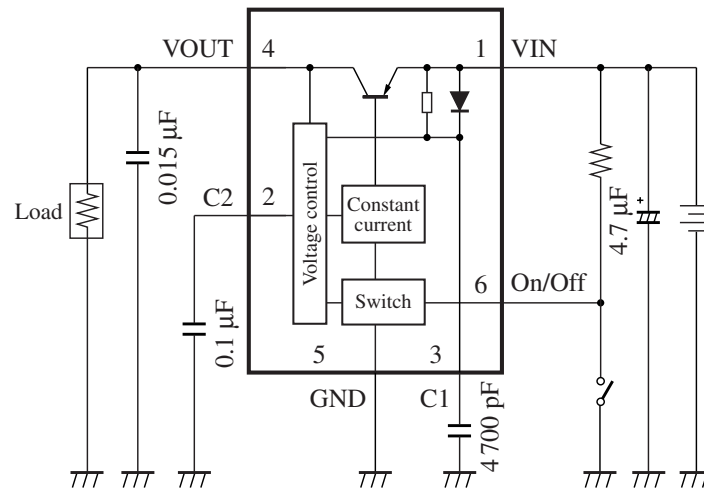

3. PCB pattern



Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products, and no license is granted under any intellectual property right or other right owned by our company or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information described in this book.
- (3) The products described in this book are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).
Consult our sales staff in advance for information on the following applications:
 - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
 - Any applications other than the standard applications intended.
- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.
 - Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.
- (7) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of Matsushita Electric Industrial Co., Ltd.