


**Adjustable Positive Linear Regulator
 Thru-Hole (TO-257AA)**

**OM7602ST
 OM7602NT
 1.5A**

Product Summary

Part Number	Input Voltage Range	Adjustable Output Voltage	Package
OM7602ST	4.25V to 41.25V	1.2V to 37V	TO-257 (Isolated)
OM7602NT	4.25V to 41.25V	1.2V to 37V	TO-257 (Non-Isolated)



Description

This three terminal positive regulator is supplied in a hermetically sealed metal package. All protective features are designed into the circuit, including thermal shutdown, current-limiting, and safe-area control. With heat sinking, these devices can deliver up to 1.5 amps of output current. This unit also features output voltages that can be trimmed from 1.2 volt to 37 volts using external resistors.

Features:

- Adjustable Output Voltage
- Eliminates Stocking Fixed Voltages
- Built-In Thermal Oveload Protection
- Short Circuit Current Limiting
- Isolated / Non-Isolated Hermetic TO-257AA Package ensures High Reliability

Absolute Maximum Ratings @ Tc = 25°C

Parameter	Symbol	Value	Units
Input-Output Voltage Differential	V_{I-O}	40	V
Input Voltage Range	V_{IN}	4.25 to 41.25	
Output Voltage Range	V_{OUT}	1.2 to 37	
Output Current	I_{OUT}	1.5	A
Power Dissipation @ $T_C = 86^\circ\text{C}$	P_{DC}	17.5	W
Power Dissipation @ $T_A = 25^\circ\text{C}$	P_{DA}	3.0	
Thermal Resistance, Junction to Case	$R_{\theta JC}$	3.5	$^\circ\text{C}/\text{W}$
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	42	
Operating Junction Temperature Range	T_J	-55 to +150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-65 to +150	
Lead Temperature Soldering (10 seconds maximum)	T_L	300	

Electrical Characteristics $-55^{\circ}\text{C} \leq T_A \leq 125^{\circ}\text{C}$, $I_L = 8.0\text{mA}$ (Unless Otherwise Specified)

Parameter	Symbol	Test Conditions	Min.	Max.	Units
Reference Voltage	V_{REF}	$V_{DIFF} = 3.0\text{V}$, $T_A = 25^{\circ}\text{C}$	1.2	1.3	V
		$V_{DIFF} = 3.3\text{V}$ ③	1.2	1.3	
		$V_{DIFF} = 40\text{V}$ ③	1.2	1.3	
Line Regulation ①	R_{LINE}	$3.0\text{V} \leq V_{DIFF} \leq 40\text{V}$, $V_{OUT} = V_{REF}$, $T_A = 25^{\circ}\text{C}$	-9.0	9.0	mV
		$3.3\text{V} \leq V_{DIFF} \leq 40\text{V}$, $V_{OUT} = V_{REF}$ ③	-23	23	
Load Regulation ①	R_{LOAD}	$V_{DIFF} = 3.0\text{V}$, $10\text{mA} \leq I_L \leq 1.5\text{A}$, $T_A = 25^{\circ}\text{C}$	-15	15	mV
		$V_{DIFF} = 3.3\text{V}$, $10\text{mA} \leq I_L \leq 1.5\text{A}$ ③	-15	15	
		$V_{DIFF} = 40\text{V}$, $10\text{mA} \leq I_L \leq 300\text{mA}$, $T_A = 25^{\circ}\text{C}$	-15	15	
		$V_{DIFF} = 40\text{V}$, $10\text{mA} \leq I_L \leq 195\text{mA}$ ③	-15	15	
Thermal Regulation	V_{RTH}	$V_{IN} = 14.6\text{V}$, $I_L = 1.5\text{A}$, $P_D = 20\text{W}$, $t = 20\text{ms}$, $T_A = 25^{\circ}\text{C}$	-16	16	
Ripple Rejection ②	R_N	$f = 120\text{Hz}$, $V_{OUT} = V_{REF}$, $C_{ADJ} = 10\mu\text{F}$ ③	66	-	dB
Adjustment Pin Current	I_{ADJ}	$V_{DIFF} = 3.0\text{V}$, $T_A = 25^{\circ}\text{C}$	-	100	μA
		$V_{DIFF} = 3.3\text{V}$ ③	-	100	
		$V_{DIFF} = 40\text{V}$ ③	-	100	
Adjustment Pin Current Change	ΔI_{ADJ}	$V_{DIFF} = 3.0\text{V}$, $10\text{mA} \leq I_L \leq 1.5\text{A}$, $T_A = 25^{\circ}\text{C}$	-5.0	5.0	μA
		$V_{DIFF} = 3.3\text{V}$, $10\text{mA} \leq I_L \leq 1.5\text{A}$ ③	-5.0	5.0	
		$V_{DIFF} = 40\text{V}$, $10\text{mA} \leq I_L \leq 300\text{mA}$, $T_A = 25^{\circ}\text{C}$	-5.0	5.0	
		$V_{DIFF} = 40\text{V}$, $10\text{mA} \leq I_L \leq 195\text{mA}$ ③	-5.0	5.0	
		$3.0\text{V} \leq V_{DIFF} \leq 40\text{V}$, $T_A = 25^{\circ}\text{C}$	-5.0	5.0	
		$3.3\text{V} \leq V_{DIFF} \leq 40\text{V}$ ③	-5.0	5.0	
Minimum Load Current	I_{LMIN}	$V_{DIFF} = 3.0\text{V}$, $V_{OUT} = 1.4\text{V}$ (forced), $T_A = 25^{\circ}\text{C}$	-	5.0	mA
		$V_{DIFF} = 3.3\text{V}$, $V_{OUT} = 1.4\text{V}$ (forced) ③	-	5.0	
		$V_{DIFF} = 40\text{V}$, $V_{OUT} = 1.4\text{V}$ (forced) ③	-	5.0	
Current Limit ②	I_{CL}	$V_{DIFF} = 15\text{V}$ ③	1.5	3.5	A
		$V_{DIFF} = 40\text{V}$, $T_A = 25^{\circ}\text{C}$	0.18	1.5	

Notes

- ① Load and Line Regulation are specified at a constant junction temperature. Pulse testing with low duty cycle is used. Changes in output voltage due to heating effects must be taken into account separately.
- ② If not tested, shall be guaranteed to specific limits.
- ③ The specifications are applied over the full operating temperature range.

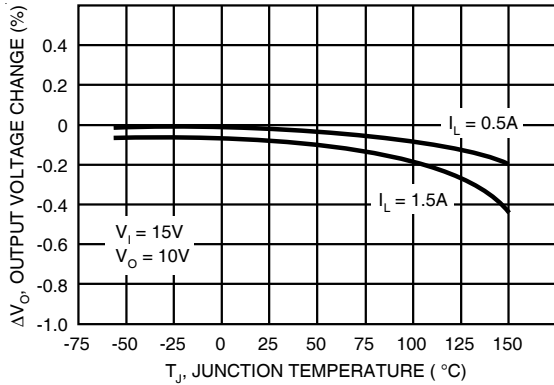


Fig. 1 Load Regulation

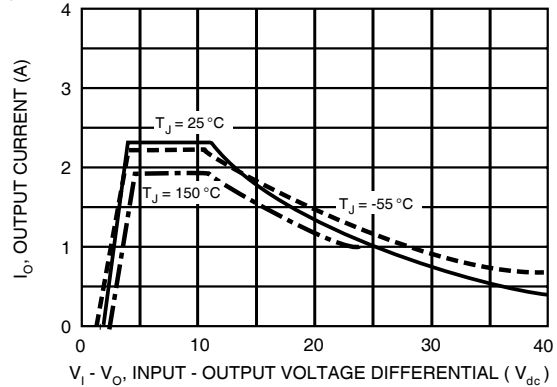


Fig. 2 Current Limit

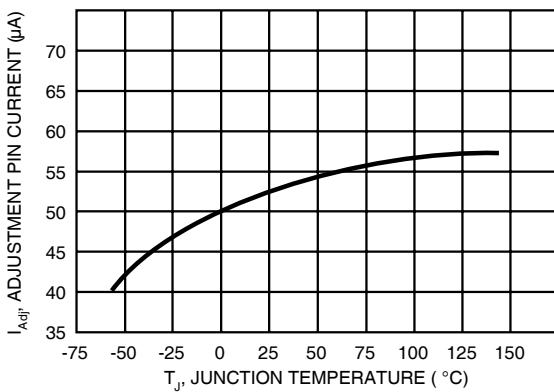


Fig. 3 Adjustment Pin Current

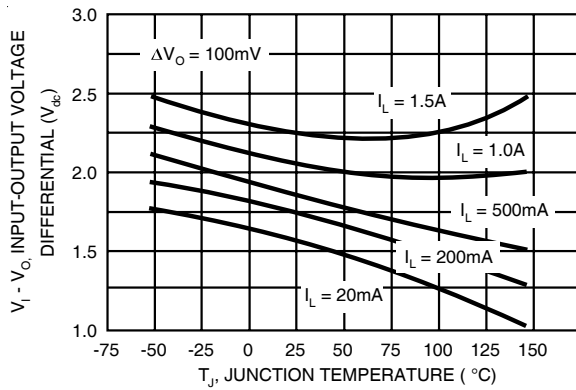


Fig. 4 Dropout Voltage

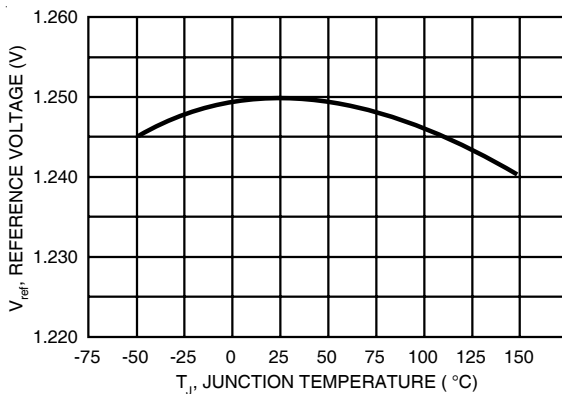


Fig. 5 Temperature Stability


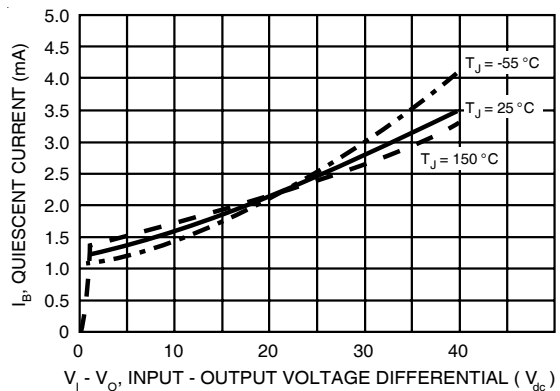


Fig. 6 Minimum Operating Current

Fig. 7 - Standard Application

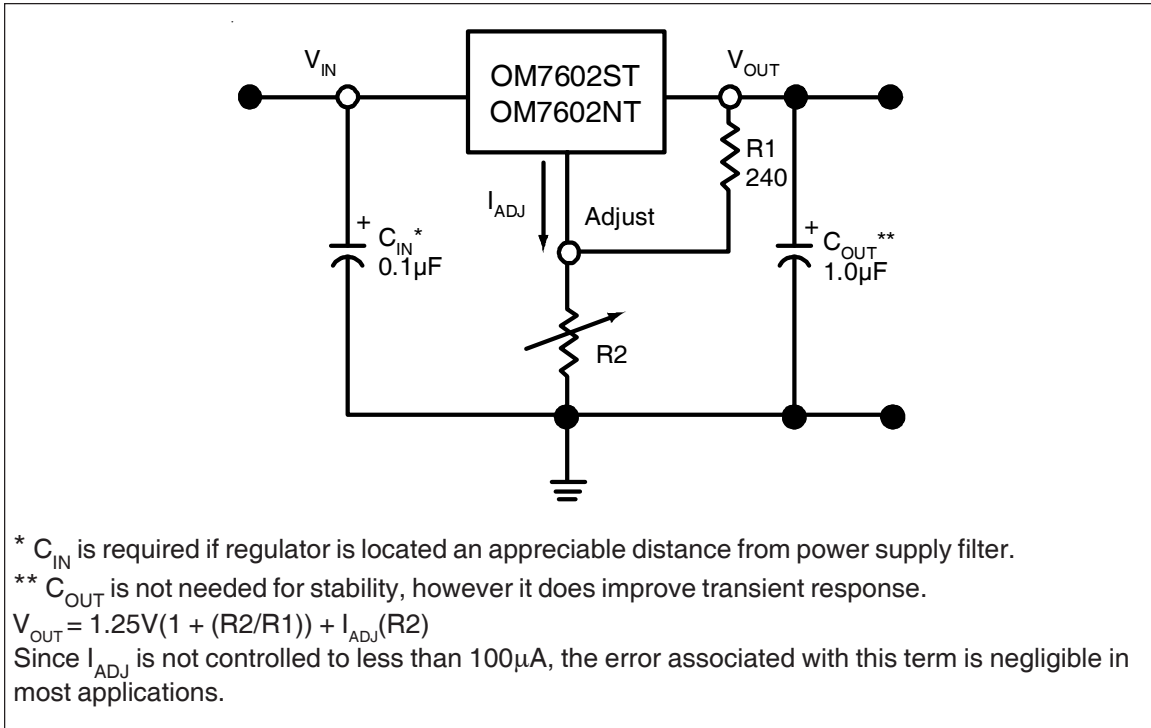

Typical Applications

Fig. 8 Adjustable Current Limiter

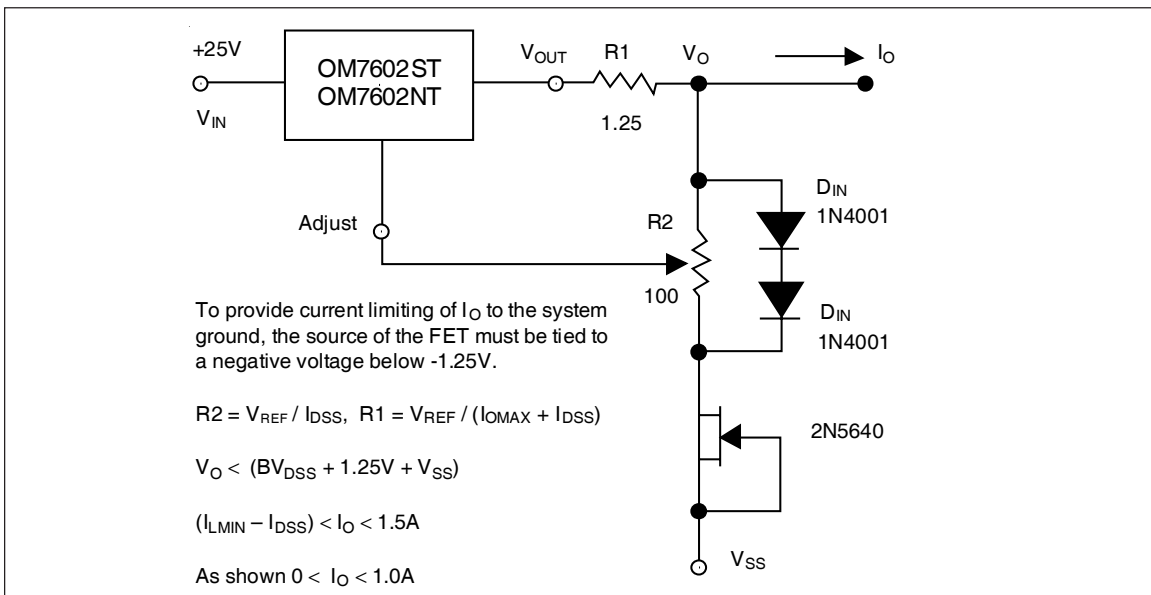


Fig. 9 5V Electronic Shut Down Regulator

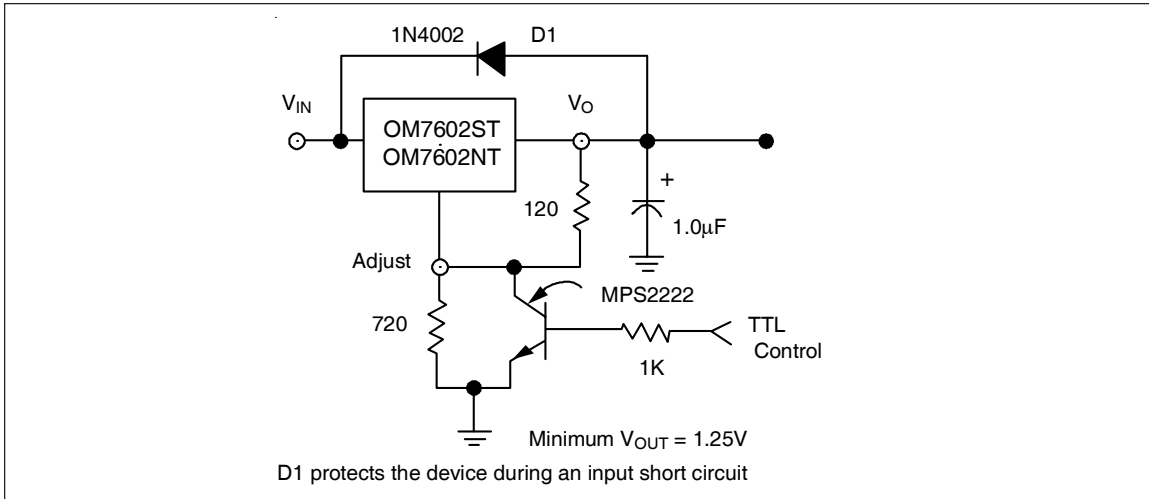


Fig. 10 Slow Turn-On Regulator


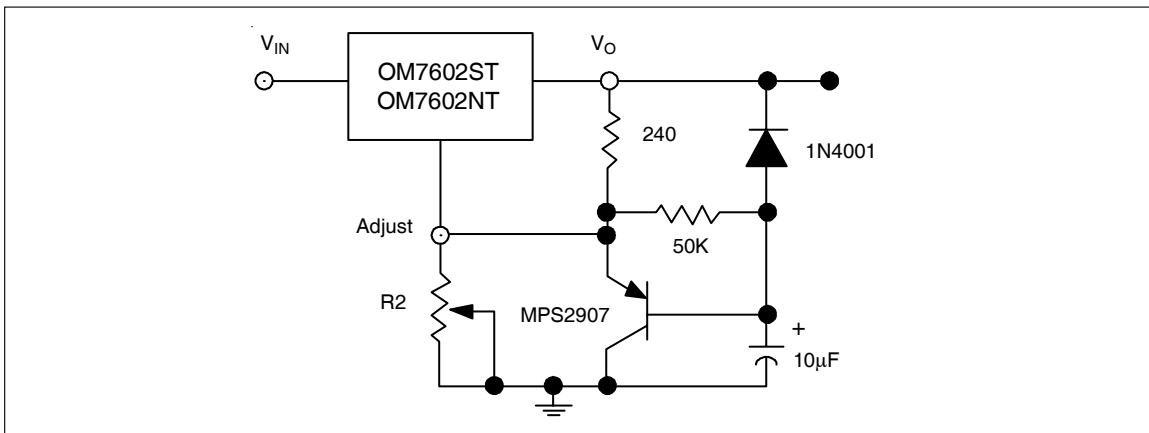



Fig. 11 Current Regulator

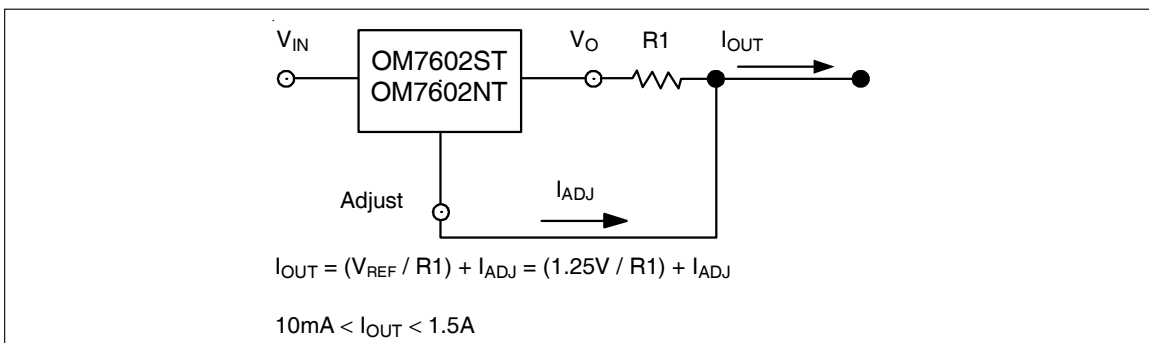

OM7602ST, OM7602NT

International
IR Rectifier

Case Outline and Dimensions — TO-257AA

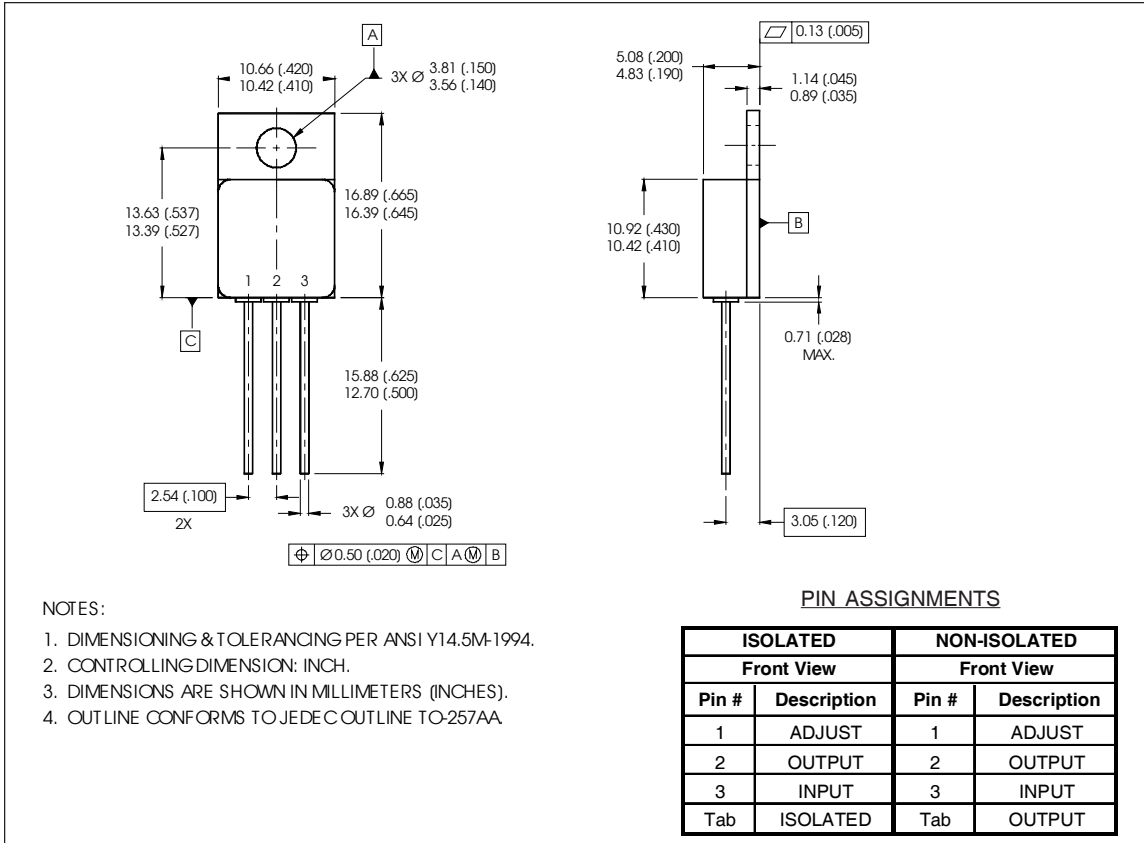

Part Numbering Nomenclature

OM 7602 S/N T M

Device Number

Screening

M = MIL-PRF-38535
P = Minimal Screening

Package Code

T = TO-257AA

Isolated / Non-Isolated

S = Isolated
N = Non-Isolated

International
IR Rectifier

WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, Tel: (310) 252-7105

IR LEOMINSTER: 205 Crawford St., Leominster, Massachusetts 01453, Tel: (978) 534-5776

Data and specifications subject to change without notice.10/2006

www.irf.com