

# PQ05SZ5/PQ05SZ1 Series

Low Power-Loss Voltage Regulators (Built-in Reverse Voltage Protection Function)

## Features

- Low power-loss (Dropout voltage: MAX. 0.5V)
- Surface mount type package (Equivalent to SC-63)
- Built-in a function to prevent reverse voltage between input and output  
The diode to prevent reverse voltage between input and output is not necessary. (When  $V_{O-I} \leq 13V$ )

## Applications


- Portable equipment
- Notebook PC

## Model Line-ups

		5V output	9V output	12V output
0.5A output	Output voltage precision:±5%	PQ05SZ5	PQ09SZ5	PQ12SZ5
	Output voltage precision:±2.5%	PQ05SZ51	PQ09SZ51	PQ12SZ51
1A output	Output voltage precision:±5%	PQ05SZ1	PQ09SZ1	PQ12SZ1
	Output voltage precision:±2.5%	PQ05SZ11	PQ09SZ11	PQ12SZ11

## Outline Dimensions

(Unit : mm)

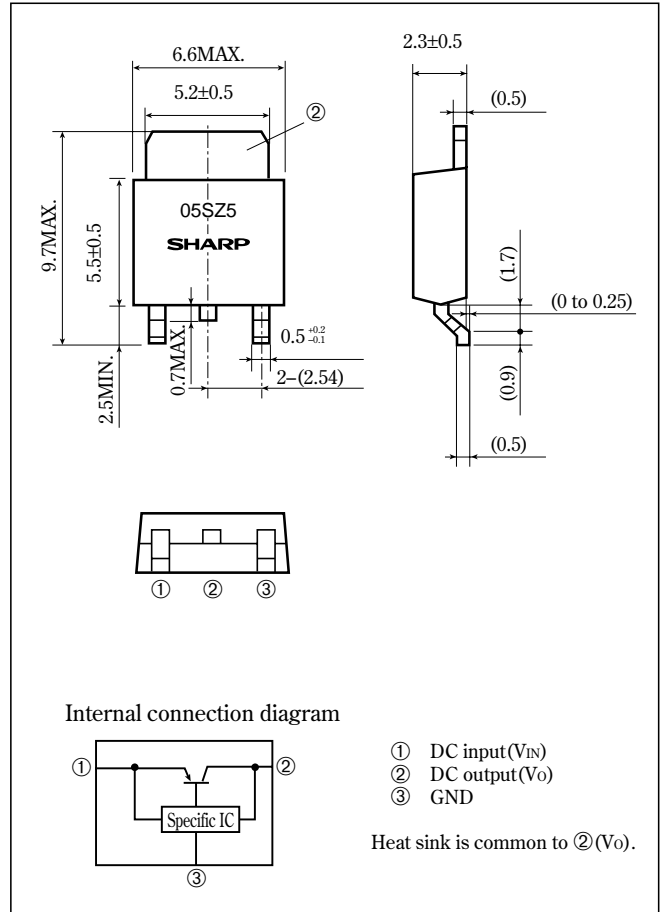

## Absolute Maximum Ratings (Ta=25°C, xx=05,09,12)

Parameter	Symbol	Conditions	Rating		Unit
			PQxxSZ5/51	PQxxSZ1/11	
Input voltage	$V_{IN}$	※1	24		V
Input-output reverse voltage	$V_{O-I}$	$V_{IN}=0V$	13		V
Output current	$I_O$		0.5	1.0	A
Power dissipation	$P_D$	Refer to Fig. 4※2	8		W
Junction temperature	$T_j$	*	150		°C
Operating temperature	$T_{opr}$		-20 to +80		°C
Storage temperature	$T_{stg}$		-40 to +150		°C
Soldering temperature	$T_{sol}$	For 10s	260		°C

※1 All are open except GND and applicable terminals.

※2 With infinite heat sink.

\* Over heat protection may operate at  $T_j \geq 125^\circ C$

•Please refer to the chapter " Handling Precautions ".

**SHARP**

Notice In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.  
Internet Internet address for Electronic Components Group <http://sharp-world.com/ecg/>

Electrical Characteristics

(Tj=25°C, xx=05,09,12)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit	
Output voltage	PQ05SZ1/5	Vo	*3	VIN=7V	4.75	5.0	5.25	
	PQ09SZ1/5			VIN=11V	8.55	9.0	9.45	
	PQ12SZ1/5			VIN=14V	11.4	12.0	12.6	
	PQ05SZ11/51			VIN=7V	4.88	5.0	5.12	
	PQ09SZ11/51			VIN=11V	8.78	9.0	9.22	
	PQ12SZ11/51			VIN=14V	11.7	12.0	12.3	
Load regulation		RegL	*4	-	0.2	2.0	%	
Line regulation		RegI	Io=5mA, *5	-	0.1	2.5	%	
Temperature coefficient of output voltage		TcVo	Io=5mA, Tj=0 to 125°C, *6	-	±0.01	-	%/°C	
Ripple rejection		RR	Refer to Fig. 2	45	60	-	dB	
Dropout voltage	PQxxSZ1/11	Vi-o	*7	Io=0.5A	-	0.2	0.5	V
	PQxxSZ5/51			Io=0.3A	-	0.2	0.5	V
Quiescent current		Iq	Io=0A, *6	-	4.0	10.0	mA	

\*3 PQxxSZ1/11 Series:Io=0.5A

PQxxSZ5/51 Series:Io=0.3A

\*4 PQ05SZ1/11:VIN=7V, Io=5mA to 1.0A PQ05SZ5/51:VIN=7V, Io=5mA to 0.5A

PQ09SZ1/11:VIN=11V, Io=5mA to 1.0A PQ09SZ5/51:VIN=11V, Io=5mA to 0.5A

PQ12SZ1/11:VIN=14V, Io=5mA to 1.0A PQ12SZ5/51:VIN=14V, Io=5mA to 0.5A

\*5 PQ05SZ1/11/5/51:VIN=6 to 16V

PQ09SZ1/11/5/51:VIN=10 to 20V

PQ12SZ1/11/5/51:VIN=13 to 23V

\*6 PQ05SZ1/11/5/51:VIN=7V

PQ09SZ1/11/5/51:VIN=11V

PQ12SZ1/11/5/51:VIN=14V

\*7 Input voltage shall be the value when output voltage is 95% in comparison with the initial value.

Fig.1 Test Circuit


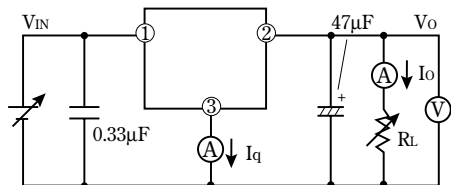


Fig.2 Test Circuit of Ripple Rejection

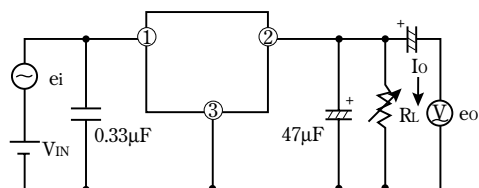

f=120Hz (sine wave)

ei(rms)=0.5V

VIN= 7V (PQ05SZ1/11/5/51)


VIN=11V (PQ09SZ1/11/5/51)

VIN=14V (PQ12SZ1/11/5/51)


Io=0.3A

RR=20 log(ei(rms)/eo(rms))

Fig.3 Overcurrent Protection Characteristics (Typical Value)

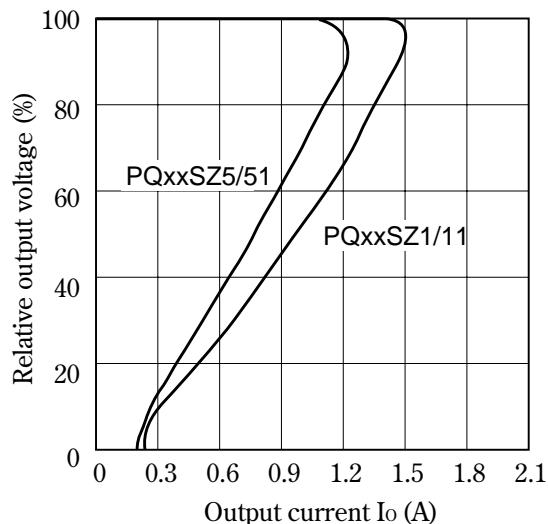


**Fig.4 Power Dissipation vs. Ambient Temperature**

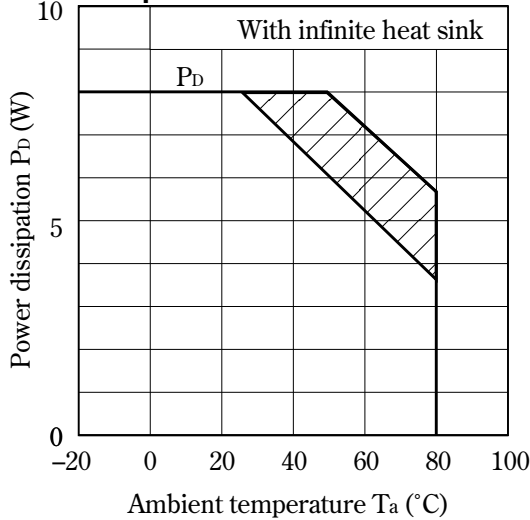


Note) Oblique line portion: Overheat protection may operate in this area.


**Fig.6 Output Voltage Deviation vs. Junction Temperature (PQ09SZ1/PQ09SZ11/PQ09SZ5/PQ09SZ51)**

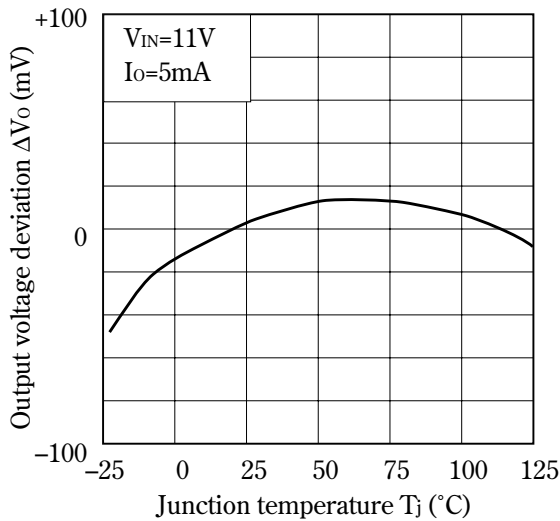


**Fig.5 Output Voltage Deviation vs. Junction Temperature (PQ05SZ1/PQ05SZ11/PQ05SZ5/PQ05SZ51)**

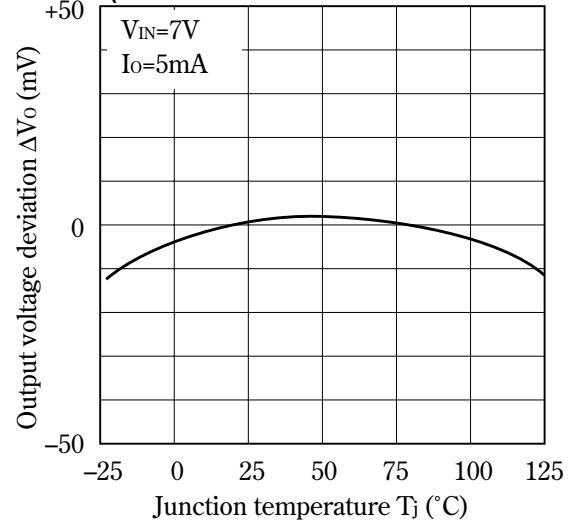


**Fig.7 Output Voltage Deviation vs. Junction Temperature (PQ12SZ1/PQ12SZ11/PQ12SZ5/PQ12SZ51)**

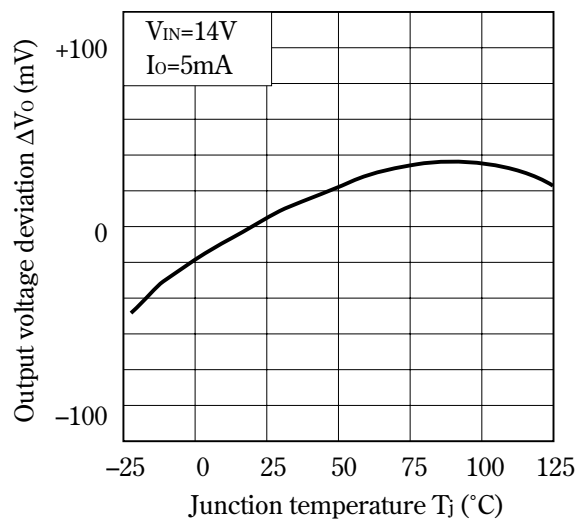


**Fig.8 Output Voltage vs. Input Voltage (PQ05SZ1/PQ05SZ11)**

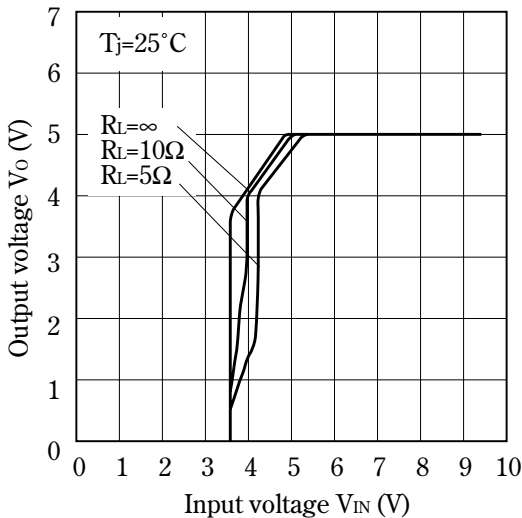


**Fig.9 Output Voltage vs. Input Voltage (PQ05SZ5/PQ05SZ51)**

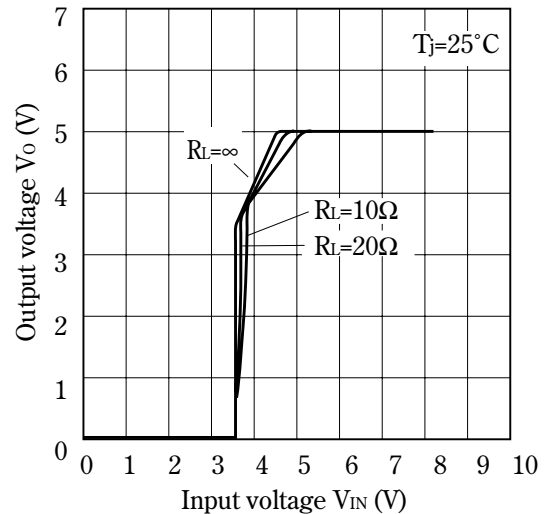


**Fig.10 Output Voltage vs. Input Voltage (PQ09SZ1/PQ09SZ11)**

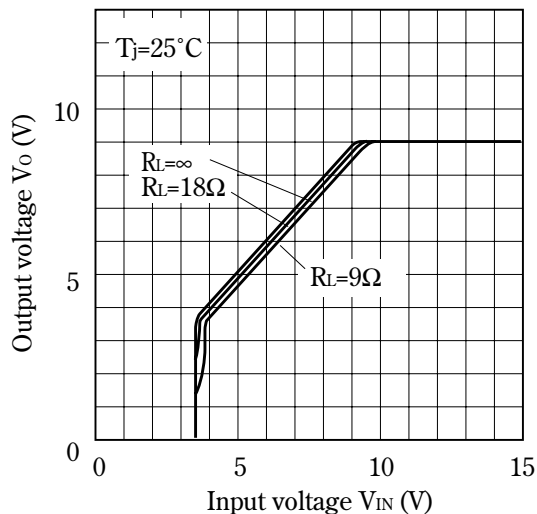


**Fig.11 Output Voltage vs. Input Voltage (PQ09SZ5/PQ09SZ51)**

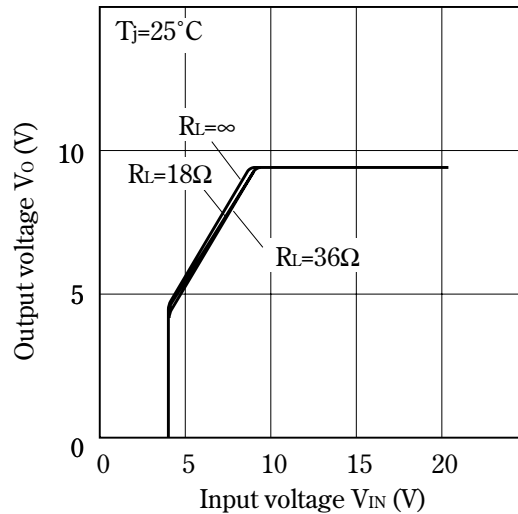


**Fig.12 Output Voltage vs. Input Voltage (PQ12SZ1/PQ12SZ11)**

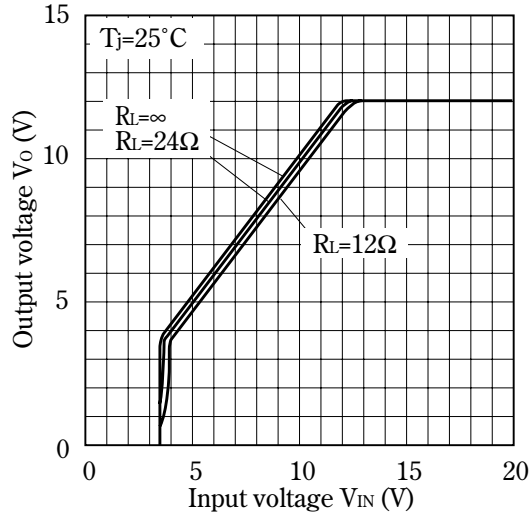


**Fig.13 Output Voltage vs. Input Voltage (PQ12SZ5/PQ12SZ51)**

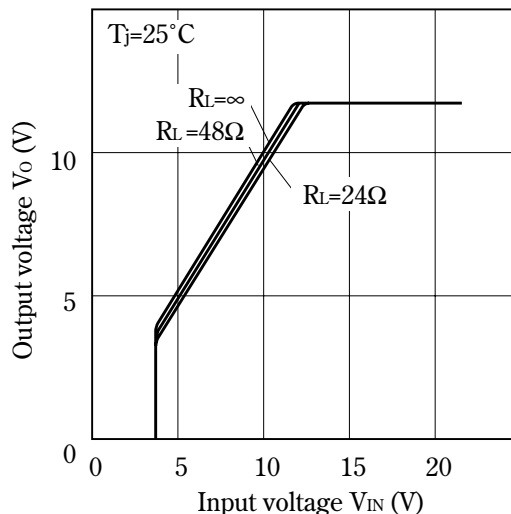


**Fig.14-a Dropout Voltage vs. Junction Temperature (PQ05SZ5/51 Series)**

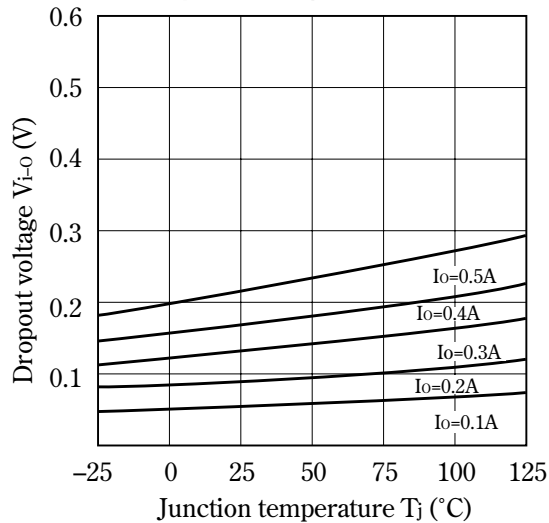


**Fig.14-b Dropout Voltage vs. Junction Temperature (PQ05SZ1/11 Series)**

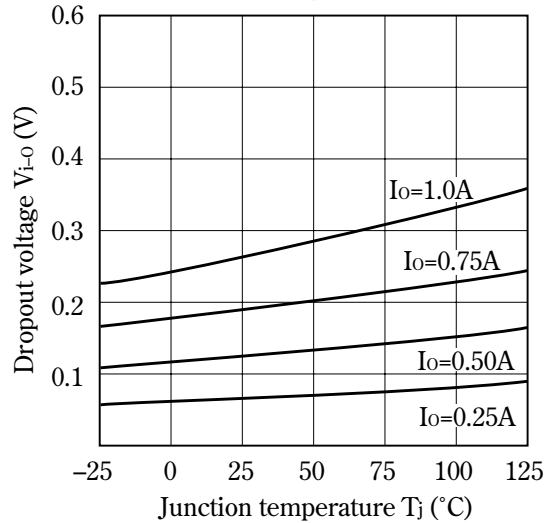


**Fig.15 Circuit Operating Current vs. Input Voltage (PQ05SZ1/PQ05SZ11)**

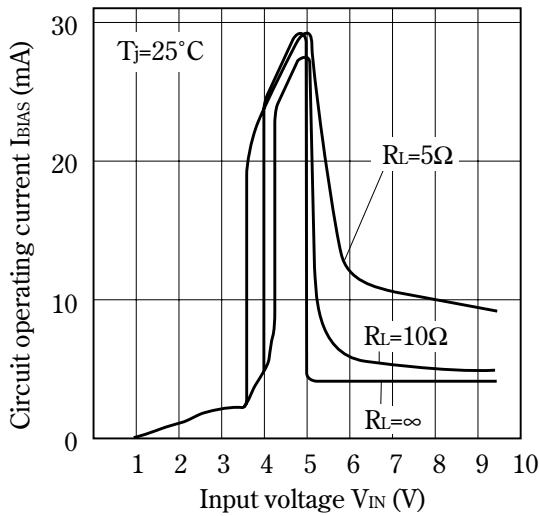


**Fig.16 Circuit Operating Current vs. Input Voltage (PQ05SZ5/PQ05SZ51)**

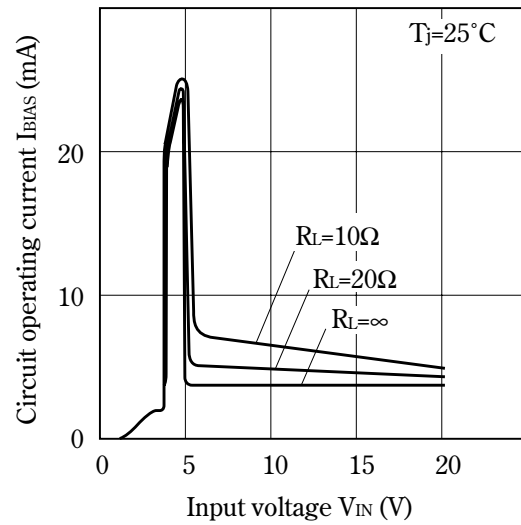


**Fig.17 Circuit Operating Current vs. Input Voltage (PQ09SZ1/PQ09SZ11)**

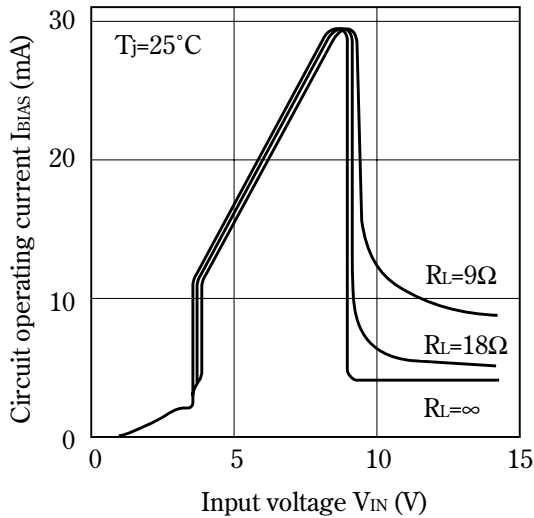


**Fig.18 Circuit Operating Current vs. Input Voltage (PQ09SZ5/PQ09SZ51)**

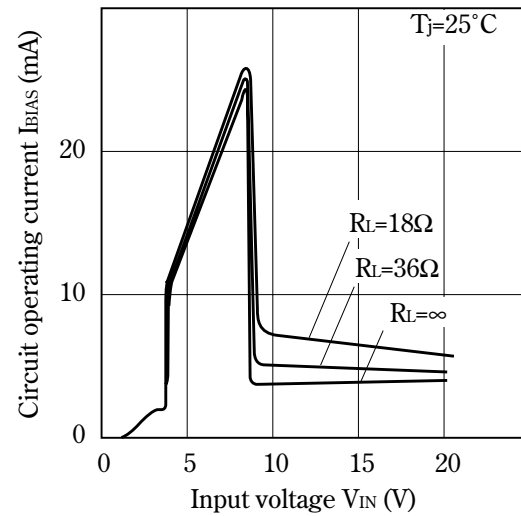


**Fig.19 Circuit Operating Current vs. Input Voltage (PQ12SZ1/PQ12SZ11)**

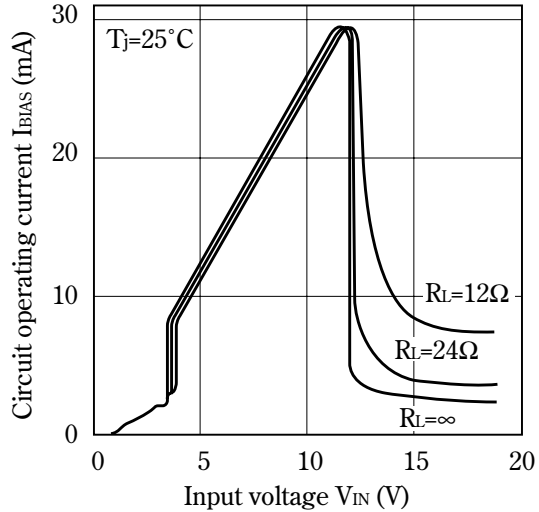


**Fig.20 Circuit Operating Current vs. Input Voltage (PQ12SZ5/PQ12SZ51)**

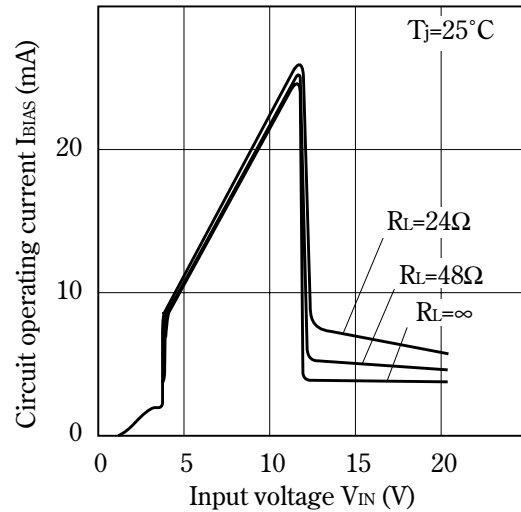


**Fig.21 Quiescent Current vs. Junction Temperature**  
(PQ05SZ1/PQ05SZ11/PQ09SZ1/PQ09SZ11/PQ12SZ1/PQ12SZ11)

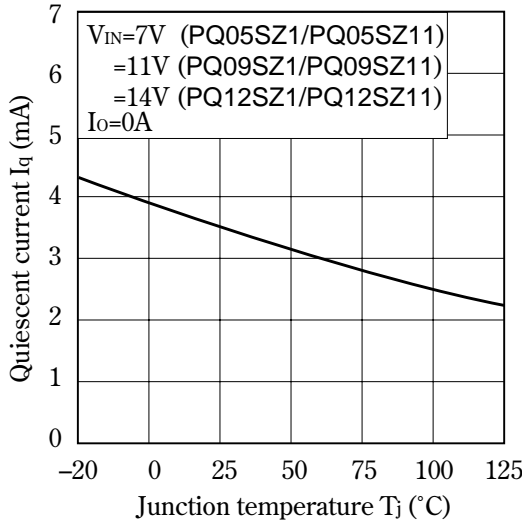


**Fig.22 Ripple Rejection vs. Input Ripple Frequency**  
(PQ05SZ1/PQ05SZ11/PQ09SZ1/PQ09SZ11/PQ12SZ1/PQ12SZ11)

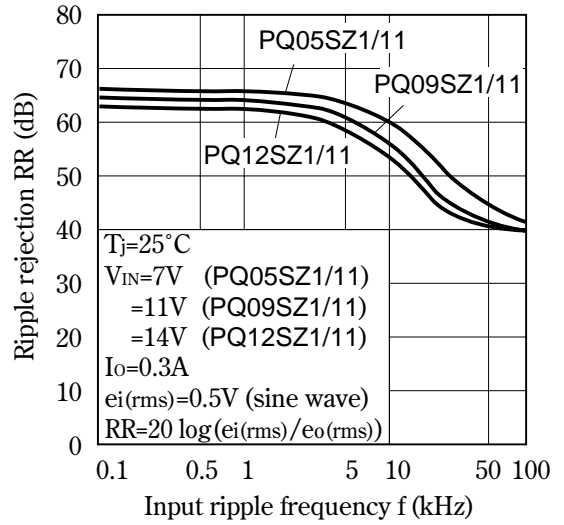


**Fig.23 Ripple Rejection vs. Input Ripple Frequency**  
(PQ05SZ5/PQ05SZ51/PQ09SZ5/PQ09SZ51/PQ12SZ5/PQ12SZ51)

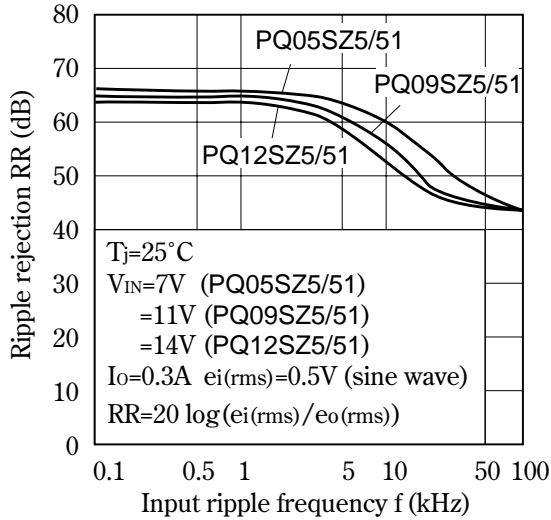

**Fig.24 Ripple Rejection vs. Output Current**  
(PQ05SZ1/11/ PQ09SZ1/11/ PQ12SZ1/11)

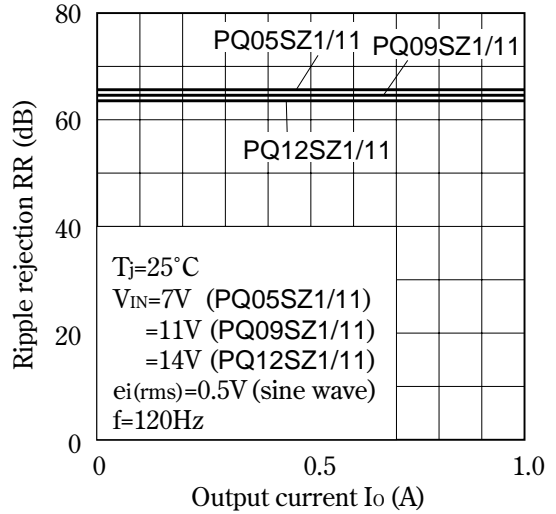

**Fig.25 Ripple Rejection vs. Output Current**  
(PQ05SZ5/51/ PQ09SZ5/51/ PQ12SZ5/51)

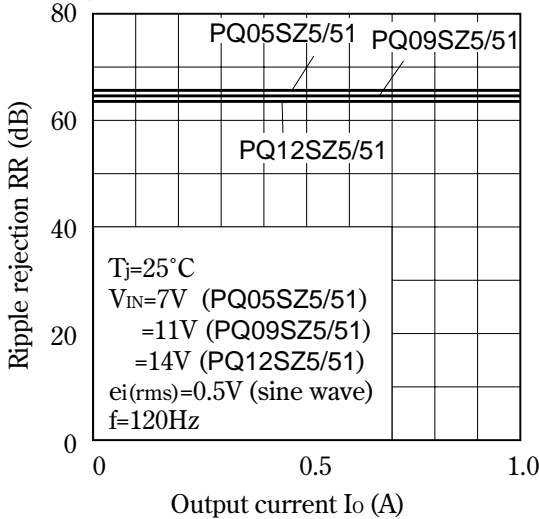

**Fig.26 Input-Output Reverse Current vs. Input-Output Reverse Voltage**

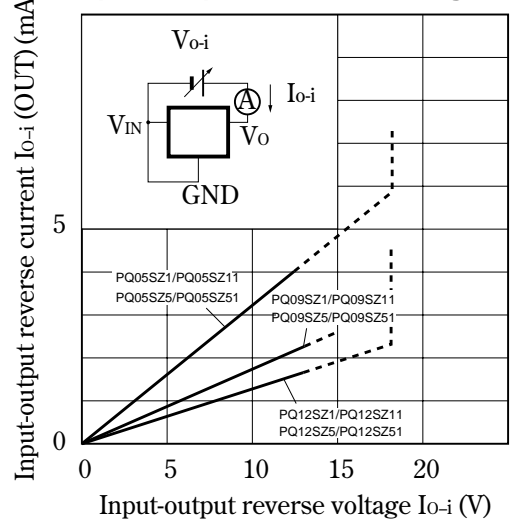


Fig.27 Power Dissipation vs. Ambient Temperature (Typical Value)



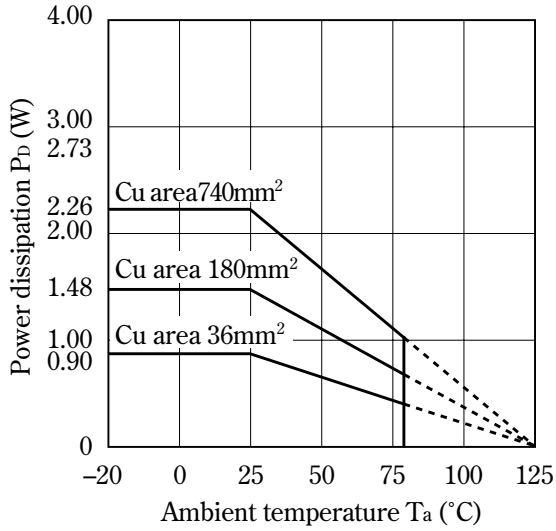


Fig.28 Power Dissipation vs. Cu Area

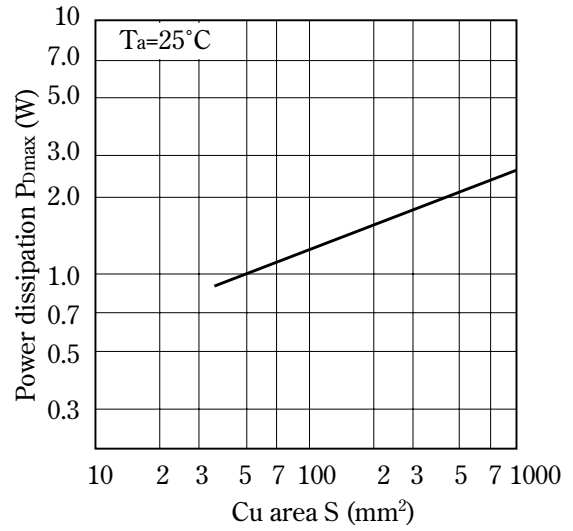

PWB



Material : Glass-cloth epoxy resin  
 Size : 50×50×1.6mm  
 Cu thickness : 35μm

Model Line-ups for Tape-packaged Products

Output current	Sleeve-packaged products		Tape-packaged products	
	Standard type	High-precision output type	Standard type	High-precision output type
0.5A output	PQ05SZ5 Series	PQ05SZ51 Series	PQ05SZ5T Series	PQ05SZ5U Series
1.0A output	PQ05SZ1 Series	PQ05SZ11 Series	PQ05SZ1T Series	PQ05SZ1U Series

## NOTICE

- The circuit application examples in this publication are provided to explain representative applications of SHARP devices and are not intended to guarantee any circuit design or license any intellectual property rights. SHARP takes no responsibility for any problems related to any intellectual property right of a third party resulting from the use of SHARP's devices.
- Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. SHARP reserves the right to make changes in the specifications, characteristics, data, materials, structure, and other contents described herein at any time without notice in order to improve design or reliability. Manufacturing locations are also subject to change without notice.
- Observe the following points when using any devices in this publication. SHARP takes no responsibility for damage caused by improper use of the devices which does not meet the conditions and absolute maximum ratings to be used specified in the relevant specification sheet nor meet the following conditions:
  - (i) The devices in this publication are designed for use in general electronic equipment designs such as:
    - Personal computers
    - Office automation equipment
    - Telecommunication equipment [terminal]
    - Test and measurement equipment
    - Industrial control
    - Audio visual equipment
    - Consumer electronics
  - (ii) Measures such as fail-safe function and redundant design should be taken to ensure reliability and safety when SHARP devices are used for or in connection with equipment that requires higher reliability such as:
    - Transportation control and safety equipment (i.e., aircraft, trains, automobiles, etc.)
    - Traffic signals
    - Gas leakage sensor breakers
    - Alarm equipment
    - Various safety devices, etc.
  - (iii) SHARP devices shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as:
    - Space applications
    - Telecommunication equipment [trunk lines]
    - Nuclear power control equipment
    - Medical and other life support equipment (e.g., scuba).
- Contact a SHARP representative in advance when intending to use SHARP devices for any "specific" applications other than those recommended by SHARP or when it is unclear which category mentioned above controls the intended use.
- If the SHARP devices listed in this publication fall within the scope of strategic products described in the Foreign Exchange and Foreign Trade Control Law of Japan, it is necessary to obtain approval to export such SHARP devices.
- This publication is the proprietary product of SHARP and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of SHARP. Express written permission is also required before any use of this publication may be made by a third party.
- Contact and consult with a SHARP representative if there are any questions about the contents of this publication.