

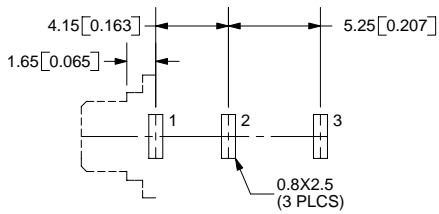

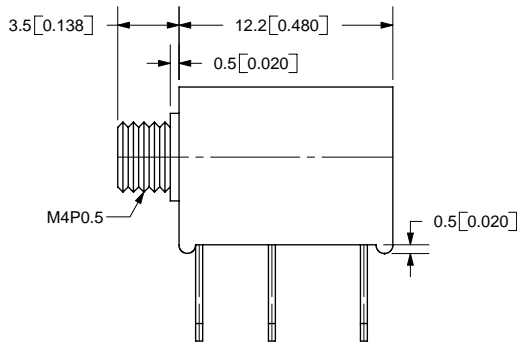


| REV. | DESCRIPTION | DATE |
|------|-------------|------------|
| A | NEW DRAWING | 12/21/2005 |

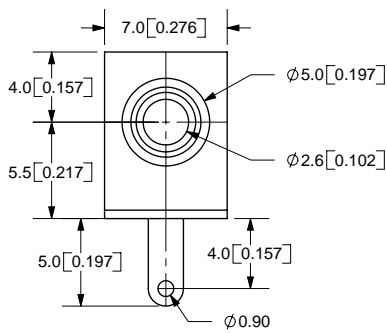

PCB LAYOUT
TOP VIEW

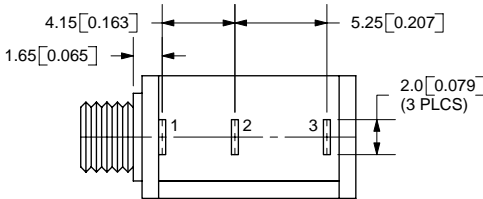

TOLERANCE:
±0.3mm

| | |
|-----------|---------|
| MODEL NO. | MJ-2502 |
| SCHEMATIC | |

SPECIFICATIONS:
 RATING: 12V DC @ 1A
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 50M OHMS MIN: 250V DC
 VOLTAGE WITHSTAND: 250V AC R.M.S. FOR 1 MINUTE
 LIFE: 5,000 CYCLES

| | MATERIAL | PLATING |
|------------|----------|---------|
| TERMINAL 1 | Brass | Silver |
| TERMINAL 2 | Brass | Silver |
| TERMINAL 3 | Brass | Silver |
| COVER | PC | |
| HOUSING | PBT | |



20050 SW 112th Ave.
 Tualatin, OR 97062
 Phone: 503-643-4899
 800-275-4899
 Fax: 503-372-1266
 Website: www.cui.com

| | | |
|------------------------------|--------------------|------------|
| TITLE: 2.5mm AUDIO JACK-MONO | | REV: A |
| PART NO. MJ-2502 | UNITS: MM [INCHES] | |
| DRAWN BY: ZRJ | APPROVED BY: | SCALE: 3:1 |

PC FILE NAME:
MJ-2502

COPYRIGHT 2006 BY CUI INC.