
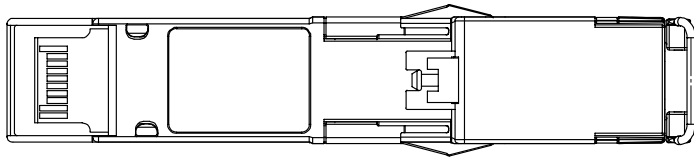

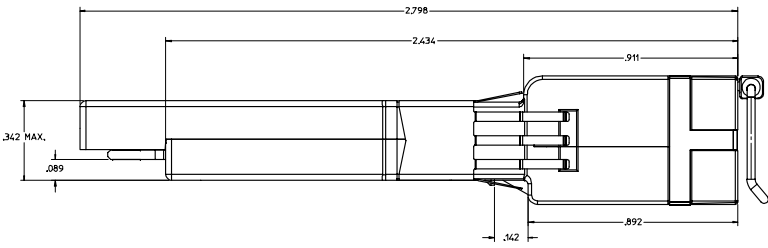



20 19 18 17 16 15 14 13 12 11 74741 9 8 7 6 5 4 3 2 1

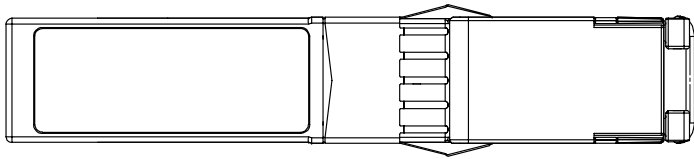

FEATURES:

1. MEETS IEEE 802.3z, u. ab.
2. MEETS 1000BASE-T STANDARDS.
3. MATES WITH STANDARD SFP MSA SPECIFICATION COMPONENTS.
4. MATES WITH COMMON 1X4 AND OTHER GANGED SFP CAGES.
5. HOT PLUGGABLE.
6. REQUIRES <1 WATT OF POWER.
7. SERIAL ID.
8. SOFTWARE CONFIGURABLE.
9. 100 METER CAT-5 AT <10 BER.
10. CENTERED RJ-45 MOD JACK. CONFORMS TO 1U RACK.
11. .567 INCH SPACE REQUIRED BETWEEN ADJACENT CAGE ON TOP OR BOTTOM.
12. ROBUST ZINC ALLOY DIE CAST BODY, NICKEL PLATED.
13. EMI GROUNDING GIRDLE PROVIDES 13 CONTACT POINTS AROUND CAGE OPENING.
14. BAIL DE-LATCH SYSTEM, USES LIFT AND PULL ACTION TO REMOVE.

747410005	1000BASE-T SFP RJ-45 CENTERED. LOS GND,REV B1 PHY
747410006	1000BASE-T SFP RJ-45 CENTERED. LOS TOGGLE,REV B1 PHY

ECT. NO. USV2006-0024 DESIGNED BY: M. BRUSSELL CHECKED BY: BRUSSELL APPROVED BY: BRUSSELL DATE: 2006/05/11 DATE: 2006/05/11 DATE: 2006/05/12	QUALITY SYMBOLS -0 -0	GENERAL TOLERANCES (UNLESS SPECIFIED) DIMENSION STYLE INCH ONLY	SCALE 5:1 DESIGN UNITS INCH	THIRD ANGLE PROJECTION REVISE ON CAD ONLY
		4 PLACES ± .005 ± .005 3 PLACES ± .005 ± .005 2 PLACES ± .005 ± .005 1 PLACE ± .005 ± .005 ANGULAR ± .2 °	DRAWN BY: KILLOYD DATE: 2006/05/11 CHECKED BY: BRUSSELL DATE: 2006/05/11 APPROVED BY: BRUSSELL DATE: 2005/05/11	TITLE 1000 BASE-T SFP ADAPTER SALES DRAWING

19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1