







DESCRIPTION: RJ-45 TO 9-POSITION MALE D-SUB - PLASTIC & METALIZED PLASTIC

**MATERIAL:**

HOOD: ABS UL 94V-HB

**RJADK09P70808Y1**

SERIES \_\_\_\_\_  
 POSITIONS 09 \_\_\_\_\_  
 GENDER P = MALE \_\_\_\_\_  
 D-SUB TERMINALS 7 = CRIMP & POKE (CONTACTS PRE-CRIMPED) \_\_\_\_\_  
 MODULAR POSITIONS 08 \_\_\_\_\_  
 MODULAR POSITIONS LOADED 08 \_\_\_\_\_  
 COLOR \_\_\_\_\_  
 1 = BLACK  
 2 = METALIZED (SHIELD RATING: 60dB)  
 3 = GRAY  
 D-SUB CONTACT PLATING \_\_\_\_\_  
 1 = GOLD FLASH

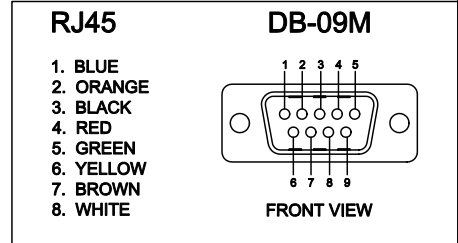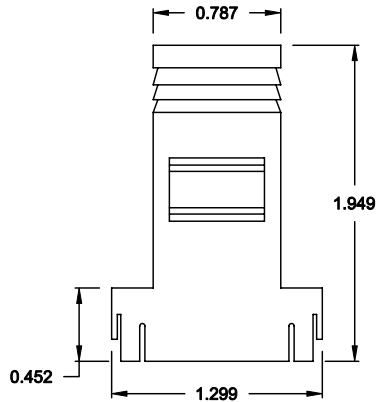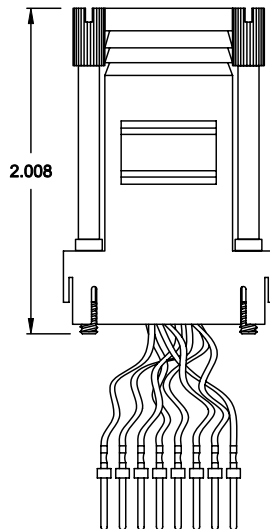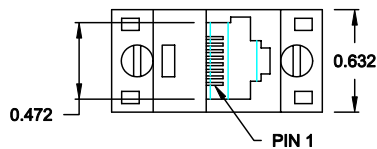

DO NOT SCALE FROM DRAWING

**RoHS COMPLIANT**

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: <b>C. SMITH</b>	DATE: <b>05-17-07</b>
			CHECKED:	DATE:
<h1>NorComp</h1>		SCALE: <b>N.T.S.</b>	SHEET <b>1</b> OF <b>1</b>	REV <b>1</b>
		DWG NO. <b>RJADK09P70808Y1</b>		