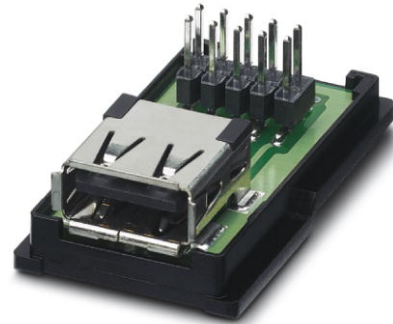


**VS-04-BUA-FK-F/IP67**

Order No.: 1653854

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1653854>

USB socket insert, 4-pos., socket USB type A on flat-ribbon cable terminal strip, pitch 2.54, for the Freenet system in the panel mounting frame, IP20 terminal outlet, 19" patch panel and service interface

**Commercial data**

EAN	4017918970185
Pack	1 pcs.
Customs tariff	85366990
Weight/Piece	0.0148 KG
Catalog page information	Page 310 (PC-2009)

**Product notes**WEEE/RoHS-compliant since:  
02/29/2008

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

**Technical data****Mechanical characteristics**

Number of positions	4
Insertion/withdrawal cycles	≥ 1000
Type of connection	Flat-ribbon cable connection, pitch 2.54 mm
Ambient temperature (operation)	-15 °C ... 65 °C

**Material data**

Inflammability class acc. to UL 94	V0
Housing material	PC
Contact carrier material	PET
Contact material	Copper alloy
Contact surface material	Gold over nickel
Degree of protection	IP20


**Electrical characteristics**

Rated voltage (III/3)	30 V
Rated current	1 A
Insulation resistance	≥ 1 GΩ
Transmission characteristics (category)	USB 2.0

**Diagrams/Drawings**

Schematic diagram

Pin	USB A
1	VBUS
2	
3	Shield
4	
5	D-
6	D+
7	Shield
8	
9	GND
10	

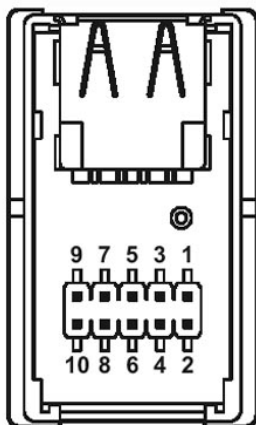

Contact assignment

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;