

Switching Type Regulator SI-3201S

Features

- Output current of 3A ($T_A = 25^\circ\text{C}$, $V_{IN} = 8$ to 18V)
 - High efficiency of 82% ($V_{IN} = 14\text{V}$, $I_O = 2\text{A}$)
 - Requires 5 external components only
 - Built-in reference oscillator (60kHz)
 - Phase internally corrected
 - Output voltage internally corrected
 - Built-in overcurrent and thermal protection circuits
 - Built-in soft start circuit

Absolute Maximum Ratings

Parameter	Symbol	Ratings	Unit	Conditions
Input voltage	V_{IN}	35	V	
Output voltage	I_O	3	A	
SQ terminal voltage with respect to ground	$V_{O, SQ}$	-1	V	
Power Dissipation	P_{D1}	22	W	With infinite heatsink
	P_{D2}	1.8	W	Stand-alone
Junction temperature	T_J	-40 to +150	°C	
Storage temperature	T_{STG}	-40 to +125	°C	
Junction to case thermal resistance	θ_{J-C}	5.5	°C/W	
Junction to ambient-air thermal resistance	θ_{J-A}	66.7	°C/W	

Recommended Operating Conditions

Parameter	Symbol	Ratings			Unit	Conditions
		min	typ	max		
Input voltage	V _{IN}	8		18	V	
Output current	I _O	0.5		3	A	
Operating temperature	T _{OP}	-40		+85	°C	T _A —P _D characteristics

Electrical Characteristics ($V_{IN} = 14V$, $I_{OUT} = 2A$, $T_J = 25^\circ C$ unless otherwise specified)

Parameter	Symbol	Ratings			Unit	Conditions
		min	typ	max		
Output voltage	V _O	4.80	5.00	5.20	V	
Line regulation	ΔV _{O LINE}			100	mV	V _{IN} =8 to 18V
Load regulation	ΔV _{O LOAD}			50	mV	I _O =0.5 to 3A
Efficiency *1	η		82		%	
Oscillation frequency	f _{osc}	50	60	70	kHz	
Quiescent circuit current	I _Q		5	10	mA	I _O =0A
Overcurrent protection starting current	I _S	3.1			A	*2
Soft start terminal	Low level voltage	V _{SSL}		0.2	V	
	Source current when low	I _{SSL}	15	25	μA	V _{SSL} =0.2V
	Discharge resistance	R _{DIS}		4	kΩ	

Notes:


*1. Efficiency is calculated by the following equation:

$$\eta = \frac{V_O \cdot I_O}{V_{IN} \cdot I_{IN}} \cdot 100 (\%)$$

*2. A drooping-type overcurrent protection circuit is built in the IC.


*3. An external voltage may not be applied to the soft start terminal. As shown in the diagram to the right, use this IC in the soft start mode with a capacitor or in the open-collector drive mode with a transistor. Leave the soft start terminal open when not using it since it is already pulled up in the IC.

External Dimensions (unit: mm)

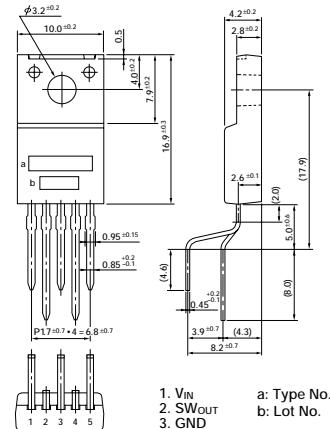


(Forming No. 1101)

Standard Circuit Diagram

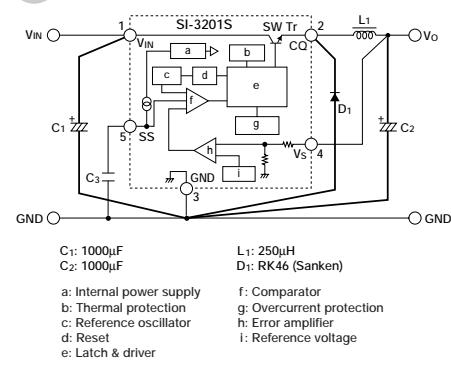


Cautions:


- (1) A high-ripple current flows through C₁ and C₂. Use high-ripple type 1000 μ F or higher capacitors with low internal resistance. Refer to the respective data books for more information on reliability and electrical characteristics of the capacitor.
 - (2) C₃ is a capacitor used for soft start.
 - (3) L₁ should be a choke coil with a low core loss for switching power supplies.
 - (4) Use a Schottky barrier diode for D₁ and make sure that the reverse voltage applied to the 2nd terminal (SQ terminal) is within the maximum ratings ($-V$). If you use a fast-recovery diode, the recovery voltage and the ON forward voltage may cause a reversed-bias voltage exceeding the maximum ratings to be applied to the 2nd terminal (SQ terminal). Applying a reversed-bias voltage exceeding the maximum rating to the 2nd terminal (SQ terminal) may damage the IC.
 - (5) The 4th terminal (V_s) is an output voltage detection terminal. Since this terminal has a high impedance, connect it to the positive (+) terminal of C₂ via the shortest possible route.
 - (6) Leave the 5th terminal (soft start terminal) open when not using it. It is pulled up internally.
 - (7) To ensure optimum operating environment, connect the high-frequency current line with minimum wiring length.

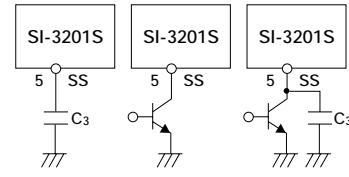


■ Line Regulation

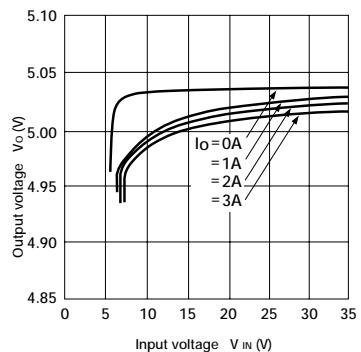


■ Load Regulation

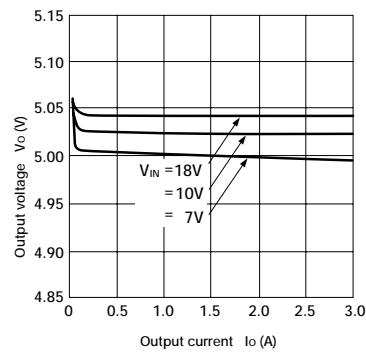


■ Rise Characteristics

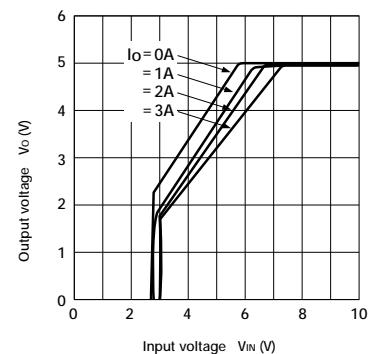


■ Efficiency Curve

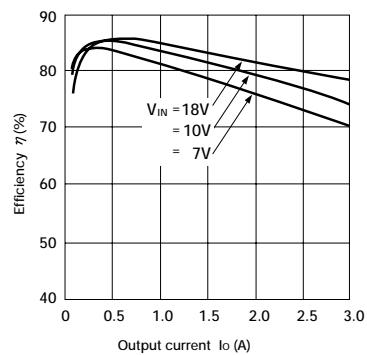

■ Overcurrent Protection Characteristics

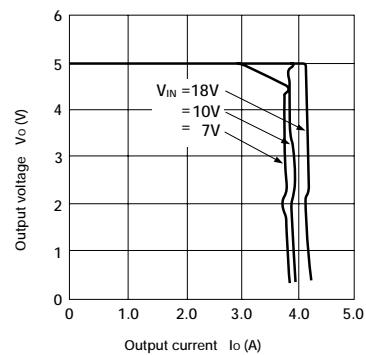

■ Overcurrent Protection Temperature Characteristics

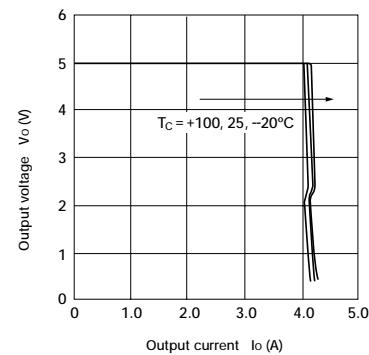

■ $T_a - P_d$ Characteristics

