
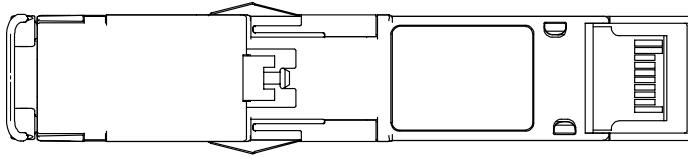
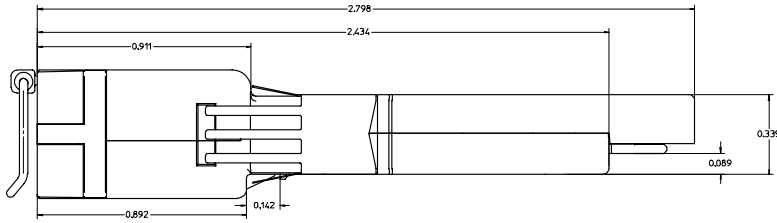




20 19 18 17 16 15 14 13 12 11 74741 9 8 7 6 5 4 3 2 1

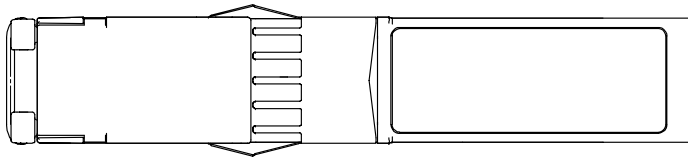

- FEATURES:**
1. MEETS IEEE 802.3z, u, ab.
 2. MEETS 1000BASE-T STANDARDS.
 3. MATES WITH STANDARD SFP MSA SPECIFICATION COMPONENTS.
 4. MATES WITH COMMON 1X4 AND OTHER GANGED SFP CAGES.
 5. HOT PLUGGABLE.
 6. REQUIRES <1 WATT OF POWER.
 7. SERIAL ID.
 8. SOFTWARE CONFIGURABLE.
 9. 100 METER CAT-5 AT <10° BER.
 10. CENTERED RJ-45 MOD JACK, CONFORMS TO 1U RACK.
 11. .567 INCH SPACE REQUIRED BETWEEN ADJACENT CAGE ON TOP OR BOTTOM.
 12. ROBUST ZINC ALLOY DIE CAST BODY, NICKEL PLATED.
 13. EMI GROUNDING GRIDLE PROVIDES 13 CONTACT POINTS AROUND CAGE OPENING.
 14. BAIL DE-LATCH SYSTEM, USES LIFT AND PULL ACTION TO REMOVE.
 15. LEAD FREE, RoHS COMPLIANT.

PART NUMBER	DESCRIPTION
747410021	1000BASE-T SFP RJ-45 CENTERED, LOS_GND
747410022	1000BASE-T SFP RJ-45 CENTERED, LOS_TOGGLE

EC. NO. US32007/00/2 APPROVED BY: [Signature] DATE: 2006/08/07 CHECKED BY: [Signature] DATE: 2006/08/07 APPROVED BY: [Signature] DATE: 2006/08/15	QUALITY SYMBOLS ▽-0 ▽-0	GENERAL TOLERANCES (UNLESS SPECIFIED) DIMENSION STYLE: INCH ONLY	SCALE: 5:1 DESIGN UNITS: INCH	THIRD ANGLE PROJECTION REVISE ON CAD ONLY
		4 PLACES ± .005 3 PLACES ± .004 2 PLACES ± .003 1 PLACE ± .002 ANGULAR ± .2°	DRAWN BY: KILLOYD DATE: 2003/07/29 CHECKED BY: BRUSSELL DATE: 2003/07/29 APPROVED BY: BRUSSELL DATE: 2003/07/29	TITLE: 1000 BASE-T SFP ADAPTER SALES DRAWING MOLEX INCORPORATED
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1