


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DN	APVD
ES	00	Revised FB00-0022-05	18FEB05	G.Z.	I.E

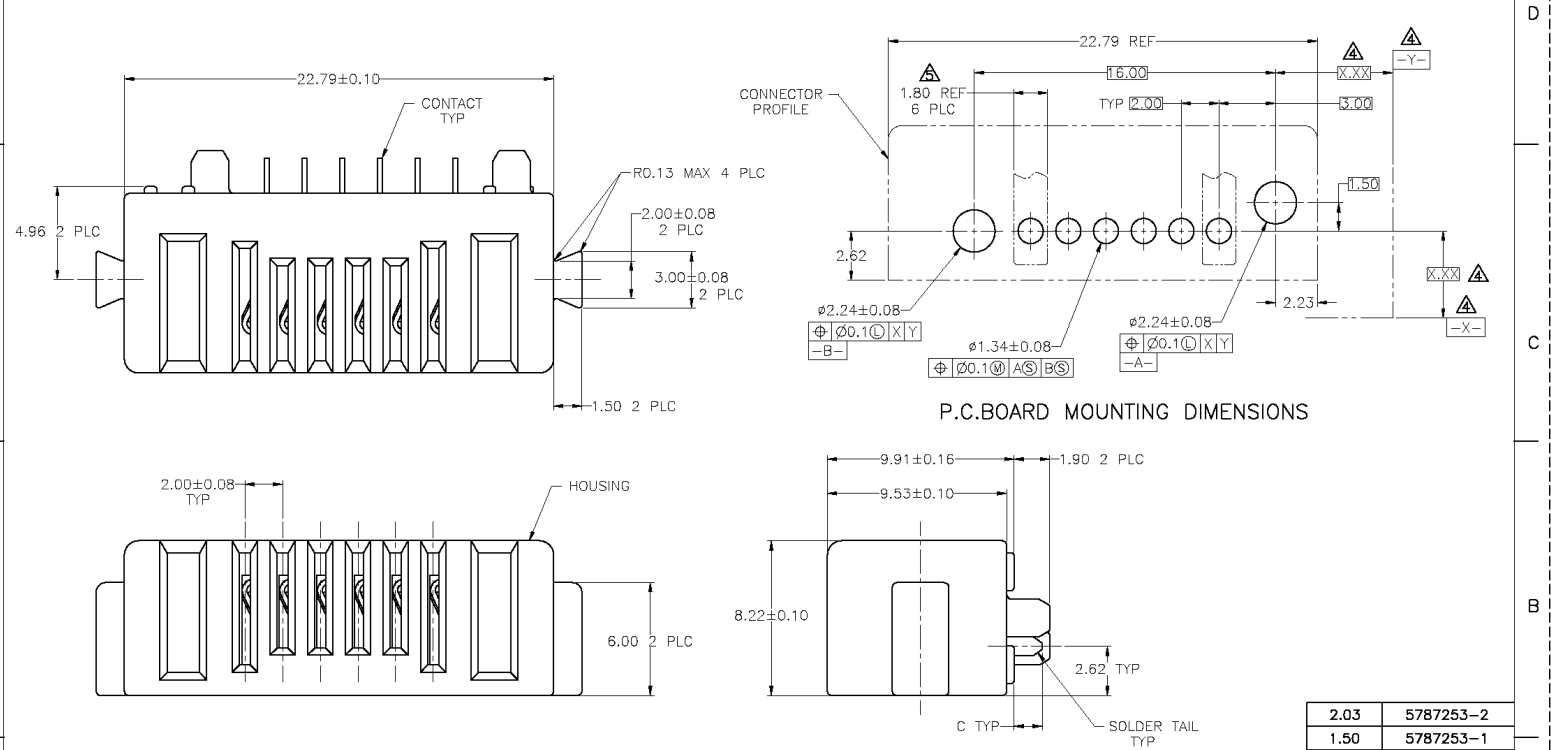

NOTE:
 ⚠ LCP, UL 94V-0 RATED, BLACK.
 ⚠ PHOSPHOR BRONZE.
 ⚠ 0.076um MIN. GOLD OVER 0.76um MIN. PALLADIUM NICKEL ON MATING AREA, 3.80um MIN. TIN ON SOLDER TAIL, ALL OVER 1.27um MIN. NICKEL.
 ⚠ DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
 ⚠ RECOMMENDED MINIMUM TRACE WIDTH FOR END POSITIONS WHEN CARRYING 3 AMPS: 1.8 WIDE x 55um THICK, BOTH SIDES.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DMN GAVIN ZHANG 23NOV04	 Tyco Electronics Corporation Shanghai, P.R.China, 200233
DIMENSIONS: mm		GJK STEVEN YAO 23NOV04	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD I. ENOMOTO 23NOV04	NAME
0 PLC ± -	1 PLC ± -	PRODUCT SPEC	RECEPTACLE ASSEMBLY, 6 POSITION, THRU-HOLE, MDI
2 PLC ± 0.13	3 PLC ± -	APPLICATION SPEC	-
4 PLC ± -	ANGLES ± -	WEIGHT	SIZE CAGE CODE DRAWING NO RESTRICTED TO
MATERIAL ⚠ -	FINISH ⚠ -	CUSTOMER DRAWING	A3 00779 C=5787253
		SCALE 5:1	SHEET 1 OF 1 REV A

AMP 1470-18 REV 31MAR2000

F:\Gavin zhang\5787253- battery\C_5787253_o.dwg