

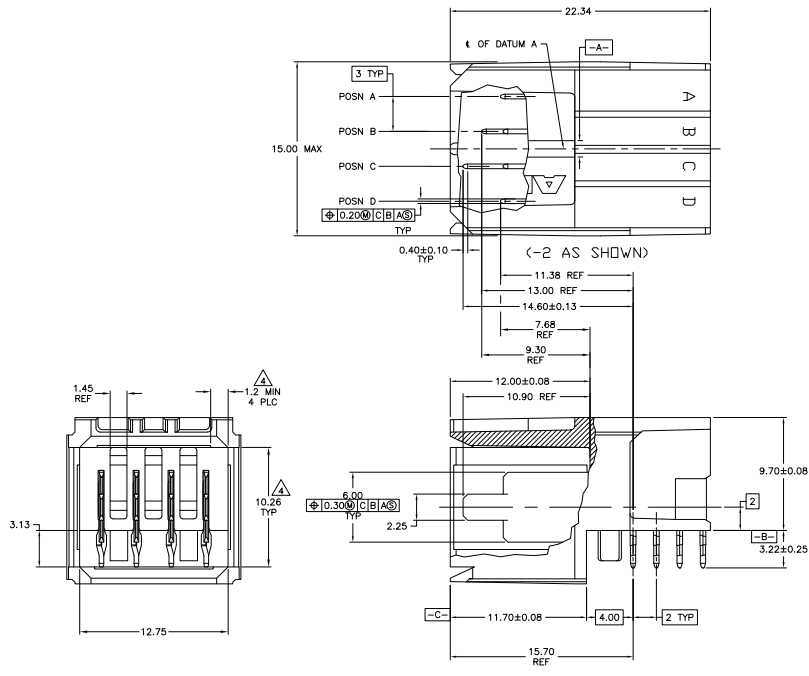



REV	DATE	DESCRIPTION	BY	CHK	APP
00					
01		REVISED PER EDD-11-004835	11MMR11	RK	HMR



- ⚠ MATERIAL: HOUSING: POLYESTER. COLOR: GRAY. UL 94V-0. CONTACT: PHOSPHOR BRONZE.
  - ⚠ FINISH: CONTACT MATING AREA: 1.27µm MIN GOLD OR 0.08µm MIN GOLD OVER 0.76µm MIN PALLADIUM-NICKEL. ACTION PIN AREA: 0.54µm MIN TIN PLATE. ALL OVER 1.27µm MIN NICKEL UNDERPLATE.
  - ⚠ FINISH: CONTACT LUBRICATION WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: TR-NWT-001217 ISSUE 1, SEPT. 1992.
  - ⚠ THE 10.26±0.13 DIMENSION APPLIES IN THIS AREA.
  - ⚠ REFERENCE APPLICATION SPEC 114-1103 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESS.
6. CURRENT RATING 10A/CONTACT PER PRODUCT SPEC 108-1651.



SECTION W-W  
SCALE 40:1

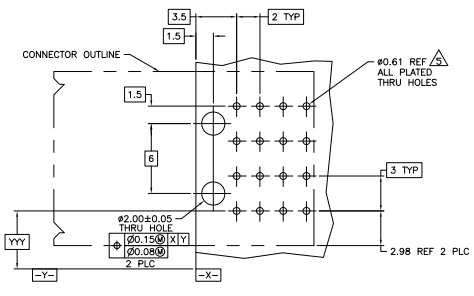

RECOMMENDED PCB HOLE LAYOUT

	A,D	B,C	D	4	5646954-5
A	B,C	D	4	5646954-4	
A	C	B,D	4	5646954-3	
C	B	A,D	4	5646954-2	
A,B,C,D	-	-	4	5646954-1	
POSITIONS LOADED WITH 10.90 REF CONTACTS	POSITIONS LOADED WITH 9.30 REF CONTACTS	POSITIONS LOADED WITH 7.68 REF CONTACTS	NO OF LOADED POSITIONS	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DESIGNER	DATE	REVISED	BY
APPROVED	DATE	REVISED	BY

TE Connectivity  
 ASSEMBLY, RIGHT ANGLE HEADER, W/ RETENTION PEGS, UNIVERSAL POWER MODULE

SIZE: A1 DATE: 007799 DRAWING NO: 5646954

CUSTOMER DRAWING