



Device Overview

The IDT 89HP0604R is a 2.5Gbps to 6.25Gbps Repeater IC that reconditions high-speed serial data streams. The 89HP0604R contains four half-duplex data lanes, where each half-duplex lane consists of a differential equalizer, as well as a transmit driver that includes de-emphasis.

High speed serial interconnects are being used as the interconnect medium between various platforms and ICs in all types of computing environments: computing, storage, consumer electronics, and communication applications. The 89HP0604R is targeted to meet the high-performance needs of serial RapidIO applications.

Features

- ◆ 4 Channel Signal Repeater
- ◆ Advanced Signal Conditioning Features
 - Programmable input equalization
 - Programmable output de-emphasis
- ◆ Advanced Diagnostic Features
 - Individual channel loopback
- ◆ Advanced Power Saving Features
 - Adjustable output voltage swing
 - Individual channel power down mode support
 - Low power consumption (~110mW/channel)
- ◆ Built-in Mux/Demux for Fail-Over Support
- ◆ I²C Programming Interface
- ◆ 9x9mm 100-ball FPBGA package
- ◆ Commercial and Industrial Temperature

Benefits

- ◆ Most cost effective way to boost signal integrity
- ◆ Adds margin to your board design
- ◆ Simplifies and adds flexibility to board design
- ◆ Most power efficient solution

Device Description

Receiver Variable Termination: Is a ground referenced termination block that supports a 100 ohm termination for normal operation.

Equalizer: Provides up to 30dB equalization capability in the receiver over 50 inches of FR4 @ 6.25Gbps while the wide-swing transmit drive offers up to 8.5dB of transmit de-emphasis.

Signal Detect: Measures the envelope of the incoming signal and indicates when the envelope has fallen below a programmable threshold. When the link becomes inactive, the transmitter goes to common-mode and becomes inactive..


Transmitter Variable Termination: Is a supply referenced termination block that supports a 100 ohm termination for normal operation. It will also support the following additional terminations:

- Squelch mode: The transmitter supports a Squelch mode, whereby the transmitter stops toggling and maintains the transmit common-mode voltage.
- Standby mode: The transmit terminations are increased to approximately 1K ohm when the channel is powered down. All current consumption of the driver is disabled and the transmitter common-mode transitions to the supply, VDD.


Output Driver: Provides 400 - 800 mVdiff-pkpk output swing. It also provides 0 to 8.5dB of transmit equalization and supports Squelch Mode where the outputs go to common-mode with an exit/entry latency of less than 8ns. Both the amplitude and equalization are programmable.

Applications

IDT's Repeater products for NIC, Baseband Card, and Radio Card Interfaces.

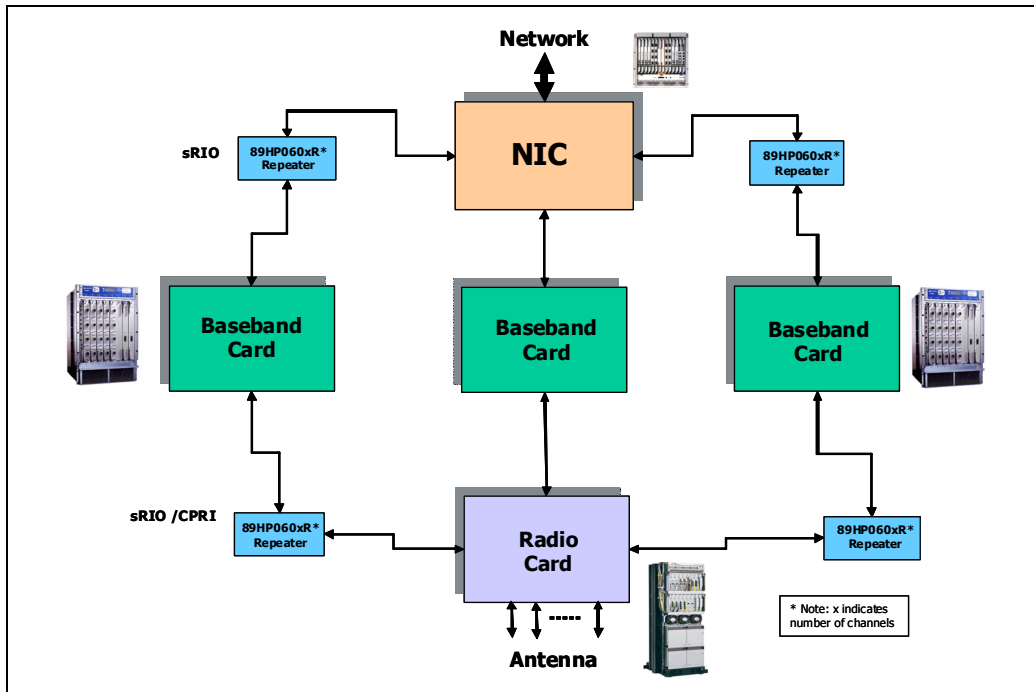

Improving Signal Integrity with IDT Repeaters

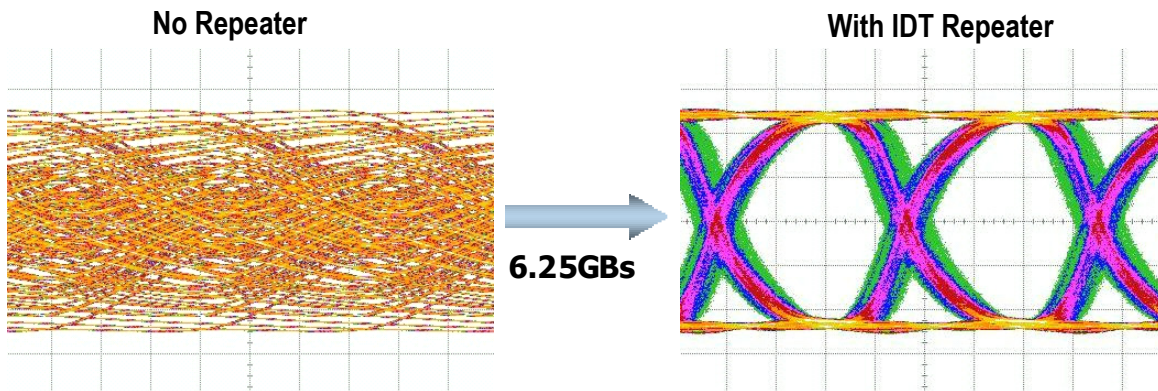

Example Eye diagram measured on actual silicon with FR4 and PRBS patterns

NOT AN OFFER FOR SALE

The information presented herein is subject to a Non-Disclosure Agreement and is for planning purposes only. Nothing contained in this presentation, whether verbal or written, is intended as, or shall have the effect of, a sale or an offer for sale that creates a contractual power of acceptance.



CORPORATE HEADQUARTERS
6024 Silver Creek Valley Road
San Jose, CA 95138

for SALES:
800-345-7015 or 408-284-8200
fax: 408-284-2775
www.idt.com

for Tech Support:
email: siphelp@idt.com
phone: 408-284-8208