



- △ HOUSING: LIQUID CRYSTAL POLYMER, COLOR BLACK.
- CONTACTS: HIGH RELIABILITY COPPER ALLOY.
- GROUND BUSES: PHOSPHOR BRONZE ALLOY, UNS C51100.
- △ CONTACTS & GROUND BUSES: NICKEL UNDERPLATE ALL OVER, MATING SURFACE PLATED TO MEET LEVEL 1 PERFORMANCE REQUIREMENTS OF TE PRODUCT SPECIFICATION 108-1422. SOLDER TAILS PLATED MATTE TIN.
- △ DATE CODE MARKED IN AREA INDICATED ON SAME SIDE AS POSITION #1.
- △ ONE GROUND BUS WITH 5 TAILS PER EACH MODULE.
- △ TOLERANCE NON-ACCUMULATIVE.
- △ FOR SLIP-FIT APPLICATIONS, ORIENTATION HOLE TO BE $\phi .079 \pm .001 [2.00 \pm 0.03]$.

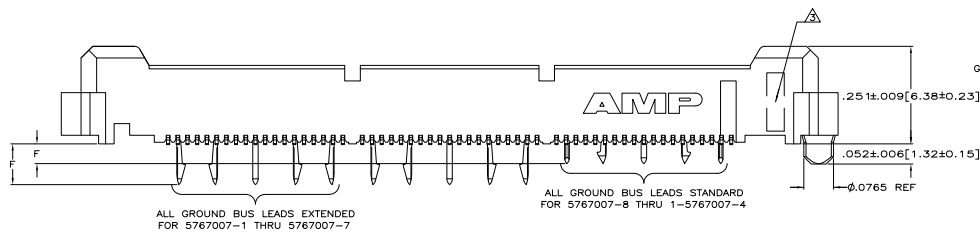

ALL GROUND BUS LEADS EXTENDED FOR 5767007-1 THRU 5767007-7
 ALL GROUND BUS LEADS STANDARD FOR 5767007-8 THRU 1-5767007-4

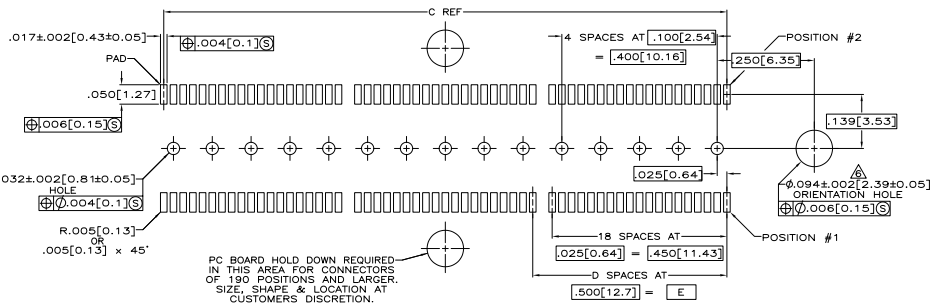

RECOMMENDED PC BOARD LAYOUT (VIEWED FROM CONNECTOR SIDE)

STANDARD	POS	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
STANDARD	053	1.35	3.000	76.2	2	3.450	87.63	3.898	99	4.000	101.6	266	1-5767007-4																																																																																								
STANDARD	053	1.35	2.500	63.5	1	2.950	74.33	3.398	86.51	3.500	88.91	228	1-5767007-3																																																																																								
STANDARD	053	1.35	2.000	50.8	4	2.450	62.23	2.898	73.61	3.000	76.2	190	1-5767007-2																																																																																								
STANDARD	053	1.35	1.500	38.1	3	1.950	49.13	2.398	60.51	2.500	63.5	152	1-5767007-1																																																																																								
STANDARD	053	1.35	1.000	25.4	2	1.450	36.83	1.898	48.21	2.000	50.8	114	1-5767007-0																																																																																								
STANDARD	053	1.35	.500	12.7	1	.950	24.13	1.398	35.51	1.500	38.1	76	5767007-9																																																																																								
STANDARD	053	1.35	.000	0	0	.450	11.43	.898	22.81	1.000	25.4	38	5767007-8																																																																																								
OBsolete	EXTENDED	107	2.72	3.000	76.2	6	3.450	87.63	3.898	99	4.000	101.6	266	5767007-7																																																																																							
OBsolete	EXTENDED	107	2.72	2.500	63.5	5	2.950	74.33	3.398	86.51	3.500	88.91	228	5767007-6																																																																																							
OBsolete	EXTENDED	107	2.72	2.000	50.8	4	2.450	62.23	2.898	73.61	3.000	76.2	190	5767007-5																																																																																							
OBsolete	EXTENDED	107	2.72	1.500	38.1	3	1.950	49.13	2.398	60.51	2.500	63.5	152	5767007-4																																																																																							
OBsolete	EXTENDED	107	2.72	1.000	25.4	2	1.450	36.83	1.898	48.21	2.000	50.8	114	5767007-3																																																																																							
OBsolete	EXTENDED	107	2.72	.500	12.7	1	.950	24.13	1.398	35.51	1.500	38.1	76	5767007-2																																																																																							
OBsolete	EXTENDED	107	2.72	.000	0	0	.450	11.43	.898	22.81	1.000	25.4	38	5767007-1																																																																																							

THIS DRAWING IS A CONTROLLED DOCUMENT. DATE 11/81 BY AD 47
 DRAWING NO. 108-1422
 PART NO. 114-11004
 CUSTOMER DRAWING
 DATE 11/81 BY RK
 PLUG ASSEMBLY, 260(6.6) VERTICAL, .025(0.64) GULL WING LEADS, VECTOR
 REFERENCE TO 10779-5767007
 FILE 8:1 SHEET 1 OF 1