

DATA SHEET

SAA4970T Economical video processing IC (ECOBENDIC)

Preliminary specification
File under Integrated Circuits, IC02

1996 Oct 25

Economical video processing IC (ECOBENDIC)

SAA4970T

FEATURES

- Digital horizontal PLL
- Digital CTI (DCTI)
- Digital luminance peaking
- Digital phase compensation filter
- D/A conversion
- Simple multi picture processing
- Coloured frame generation
- Memory/sync processing.

GENERAL DESCRIPTION

The ECOBENDIC is an economical video processing IC (Economical Back End IC) for double scan conversion. It consists of sync/memory control, video enhancing features and D/A conversion. The IC is designed to cooperate with an 83C654 type of microcontroller, Texas Instruments TMS4C2970/2971 memories plus a 4 : 1 : 1 A/D converter TDA8755/8753A.

QUICK REFERENCE DATA

| SYMBOL | PARAMETER | MIN. | MAX. | UNIT |
|------------------|-------------------------------|------|------|------|
| V _{DD} | digital supply voltage | 4.5 | 5.5 | V |
| V _{CC} | analog supply voltage | 4.75 | 5.25 | V |
| T _{amb} | operating ambient temperature | 0 | 70 | °C |

ORDERING INFORMATION

| TYPE NUMBER | PACKAGE | | |
|-------------|---------|----------------------------------------------|----------|
| | NAME | DESCRIPTION | VERSION |
| SAA4970T | VSO56 | plastic very small outline package; 56 leads | SOT190-1 |

Economical video processing IC
(ECOBENDIC)

SAA4970T

BLOCK DIAGRAM

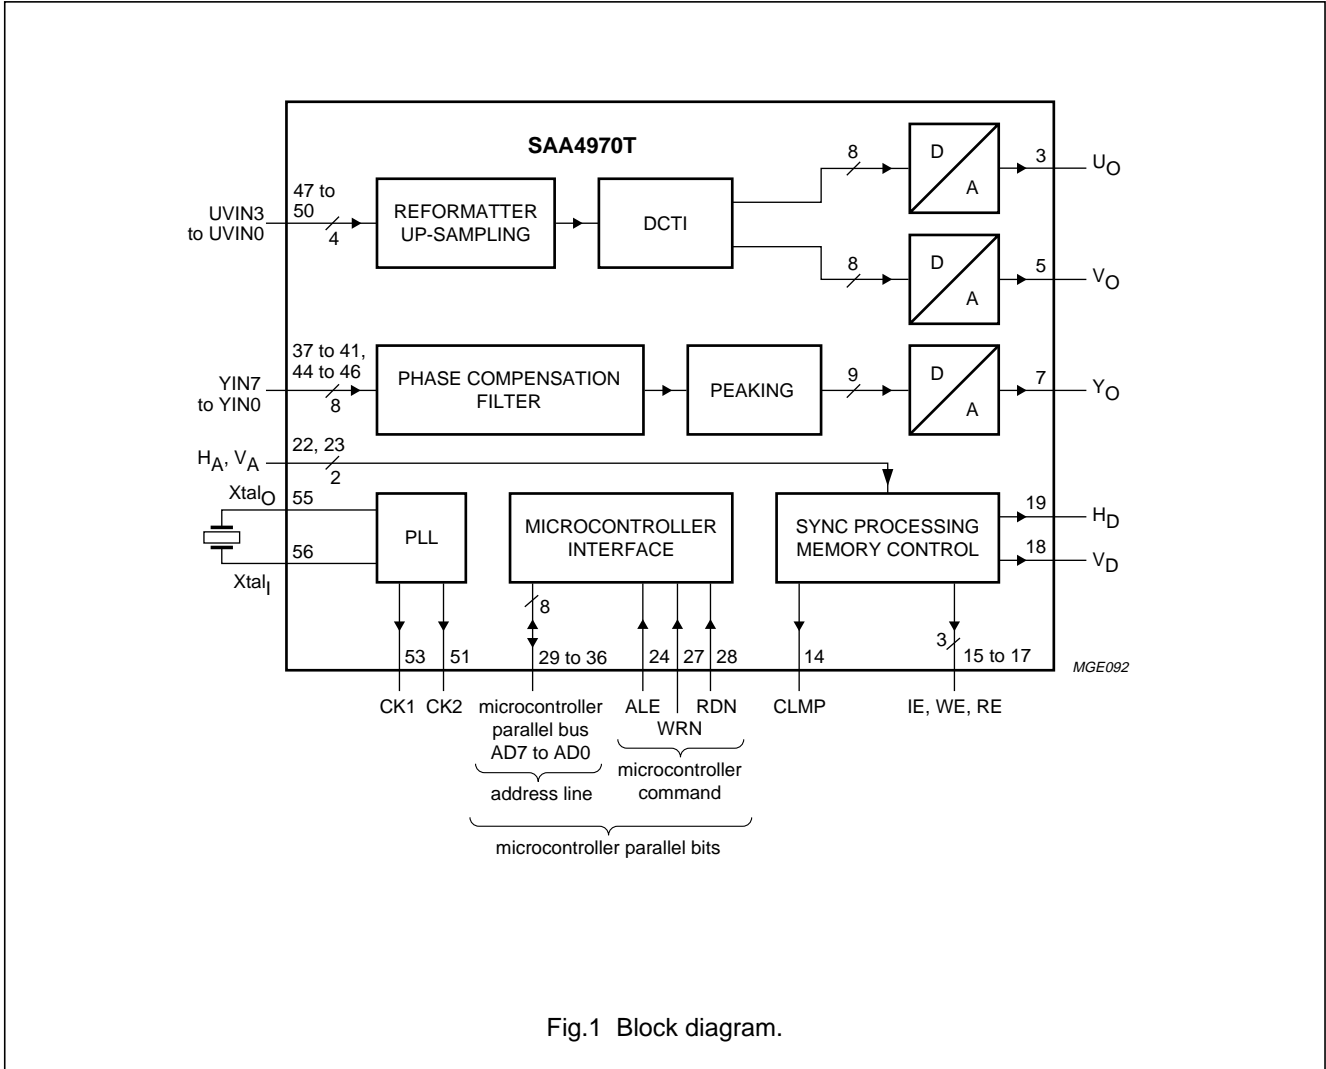


Fig.1 Block diagram.

Economical video processing IC (ECOBENDIC)

SAA4970T

PINNING

| SYMBOL | PIN | TYPE | DESCRIPTION |
|---------------------|-----|--------|-----------------------------------------------------------|
| TEST2 | 1 | input | test control |
| P _{mirref} | 2 | input | decoupling P-mirror reference |
| U _O | 3 | output | analog U output |
| V _{SSA} | 4 | ground | analog ground (0 V) |
| V _O | 5 | output | analog V output |
| V _{CC} | 6 | supply | analog supply voltage (+5 V) |
| Y _O | 7 | output | analog Y output |
| V _{ref} | 8 | supply | analog supply voltage reference D/A ladder HIGH |
| I _{ref} | 9 | supply | reference current |
| V _{refH} | 10 | supply | D/A decoupling capacitor |
| R1 | 11 | I/O | reset acquisition horizontal counter |
| R2 | 12 | I/O | reset display horizontal counter |
| PIP | 13 | input | PIP related input 0 |
| CLMP | 14 | output | clamping control |
| IE | 15 | output | field memory input enable |
| WE | 16 | output | field memory write enable |
| RE | 17 | output | field memory read enable |
| V _D | 18 | I/O | display vertical pulse |
| H _D | 19 | output | display horizontal pulse |
| RESET | 20 | output | watchdog output (microcontroller reset) |
| BONE | 21 | input | watchdog input (microcontroller bone) |
| H _A | 22 | I/O | acquisition horizontal pulse |
| V _A | 23 | I/O | acquisition vertical pulse |
| ALE | 24 | input | address latch enable |
| IT1 | 25 | output | acquisition related interrupt |
| IT2 | 26 | output | display related interrupt |
| WRN | 27 | input | write not pulse |
| RDN | 28 | input | read not pulse |
| AD7 | 29 | I/O | programmable signal positioner (psp) data bus bit 7 (MSB) |
| AD6 | 30 | I/O | psp data bus bit 6 |
| AD5 | 31 | I/O | psp data bus bit 5 |
| AD4 | 32 | I/O | psp data bus bit 4 |
| AD3 | 33 | I/O | psp data bus bit 3 |
| AD2 | 34 | I/O | psp data bus bit 2 |
| AD1 | 35 | I/O | psp data bus bit 1 |
| AD0 | 36 | I/O | psp data bus bit 0 (LSB) |
| YIN7 | 37 | input | Y input bus bit 7 (MSB) |
| YIN6 | 38 | input | Y input bus bit 6 |
| YIN5 | 39 | input | Y input bus bit 5 |
| YIN4 | 40 | input | Y input bus bit 4 |

Economical video processing IC (ECOBENDIC)

SAA4970T

| SYMBOL | PIN | TYPE | DESCRIPTION |
|-------------------|-----|--------|----------------------------------|
| YIN3 | 41 | input | Y input bus bit 3 |
| V _{DD} | 42 | supply | digital supply voltage (+5 V) |
| V _{SS} | 43 | ground | digital ground (0 V) |
| YIN2 | 44 | input | Y input bus bit 2 |
| YIN1 | 45 | input | Y input bus bit 1 |
| YIN0 | 46 | input | Y input bus bit 0 (LSB) |
| UVIN3 | 47 | input | UV input bus bit 3 (MSB) |
| UVIN2 | 48 | input | UV input bus bit 2 |
| UVIN1 | 49 | input | UV input bus bit 1 |
| UVIN0 | 50 | input | UV input bus bit 0 (LSB) |
| CK2 | 51 | I/O | display clock |
| V _{SS} | 52 | ground | digital ground (0 V) |
| CK1 | 53 | I/O | acquisition clock |
| TEST1 | 54 | input | test control |
| Xtal _O | 55 | output | external crystal output (12 MHz) |
| Xtal _I | 56 | input | PLL crystal input (12 MHz) |

Economical video processing IC (ECOBENDIC)

SAA4970T

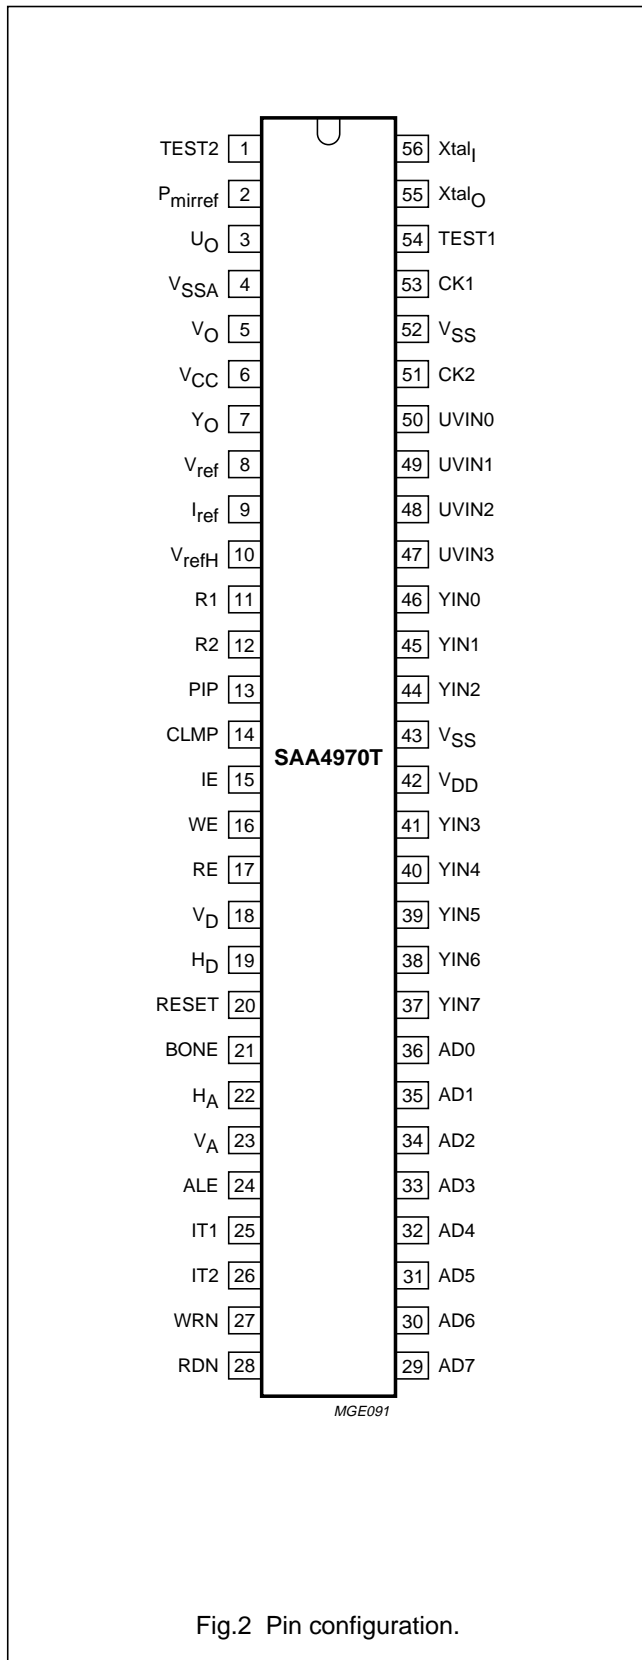


Fig.2 Pin configuration.

FUNCTIONAL DESCRIPTION

ECO data path

The data path performs the DCTI, peaking, phase compensation, framing and blanking functions plus colour reformatting and variable delay of Y to UV at the input and output of the data path.

DCTI

DCTI is implemented to get a dynamic interpolation of the low bandwidth U and V signals. First a 2 : 1 linear interpolation is done, to go from a 4 : 1 : 1 format to a 4 : 2 : 2 format. A second interpolation is done in which the data path delay is varied on the basis of a function of the second derivative of the U and V signal (or more precise:

$$\frac{d}{dt} \left\{ \left| \frac{dU}{dt} \right| + \left| \frac{dV}{dt} \right| \right\}).$$



The effect at an edge is that during the first half the data path delay is higher than nominal and in the second half it is lower than nominal. This will make the edge much steeper. As this second interpolation is done with the resolution equal to that of the Y samples and also with a zero DCTI gain a 2 : 1 interpolation is performed, a 4 : 4 : 4 format is obtained.

The DCTI function can be controlled by setting the range to ±12, ±8, ±6 or ±4 pixels (see Fig.3) or by adjusting the gain to 0, 1/4, 1/2 or 1.

An artefact of this processing exists when two edges are close together in the video. During the second half of the first edge a delay is chosen that will collect video data where the second edge is already active. The same is valid for the second edge. The result of this processing on a video pulse, which is looking like a hill, is that of a hill with one or two bumps in it. To prevent this from happening, the positions where the first derivatives in U and V change sign, are marked and used to limit the range of the relative delay. This function is called 'over the hill protection'. It can be turned **on** and **off**. Figures 5 and 6 show the effect of the DCTI function with and without 'over the hill protection' when applied to a hill-shaped video pulse.



Economical video processing IC (ECOBENDIC)

SAA4970T

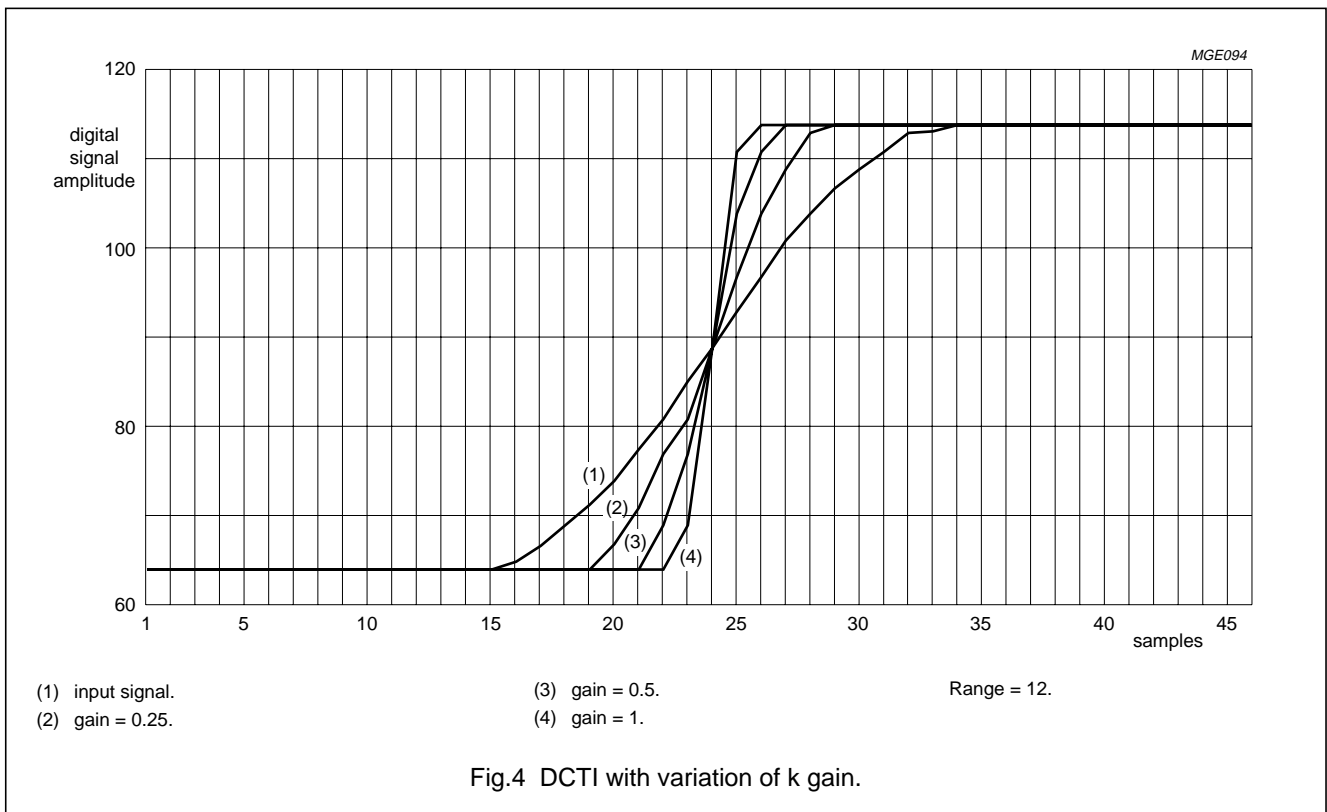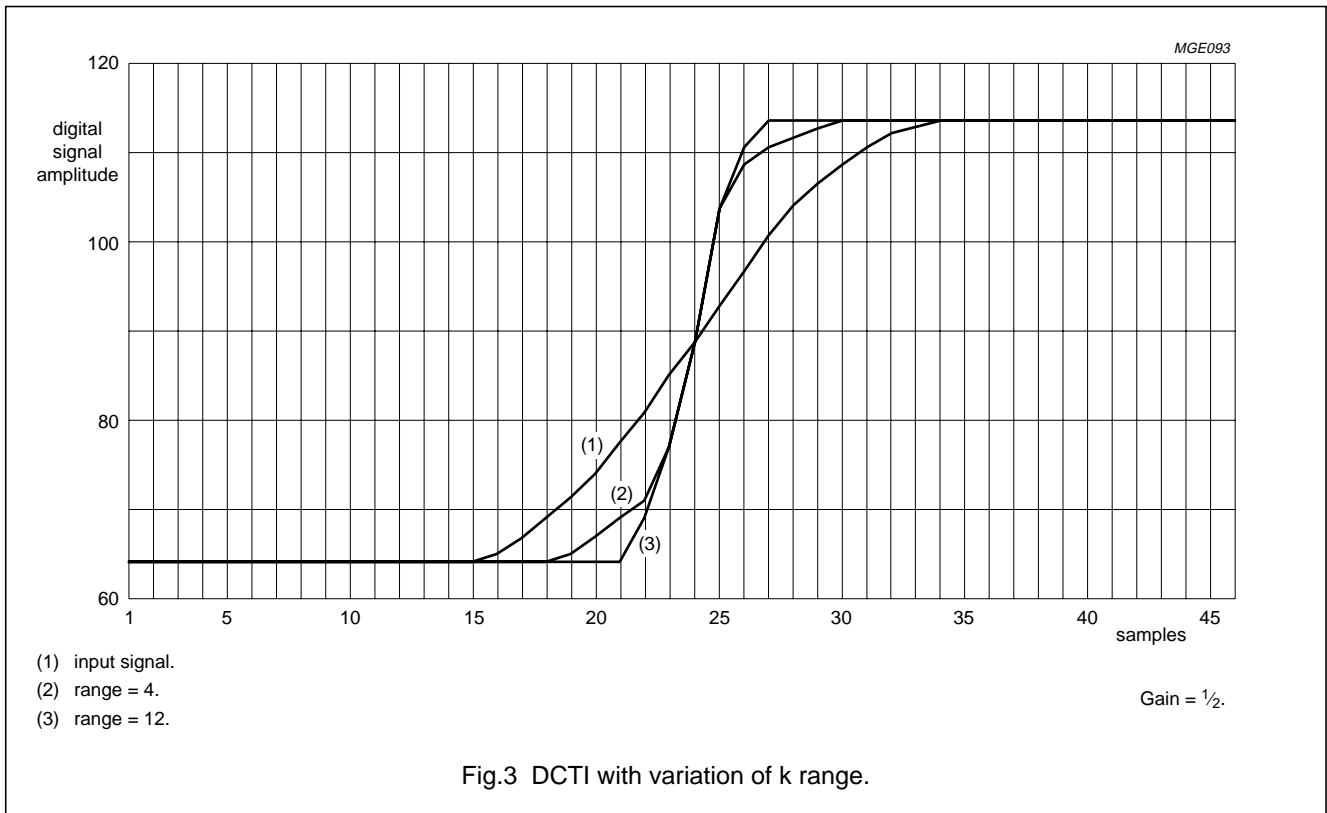

Economical video processing IC (ECOBENDIC)

SAA4970T

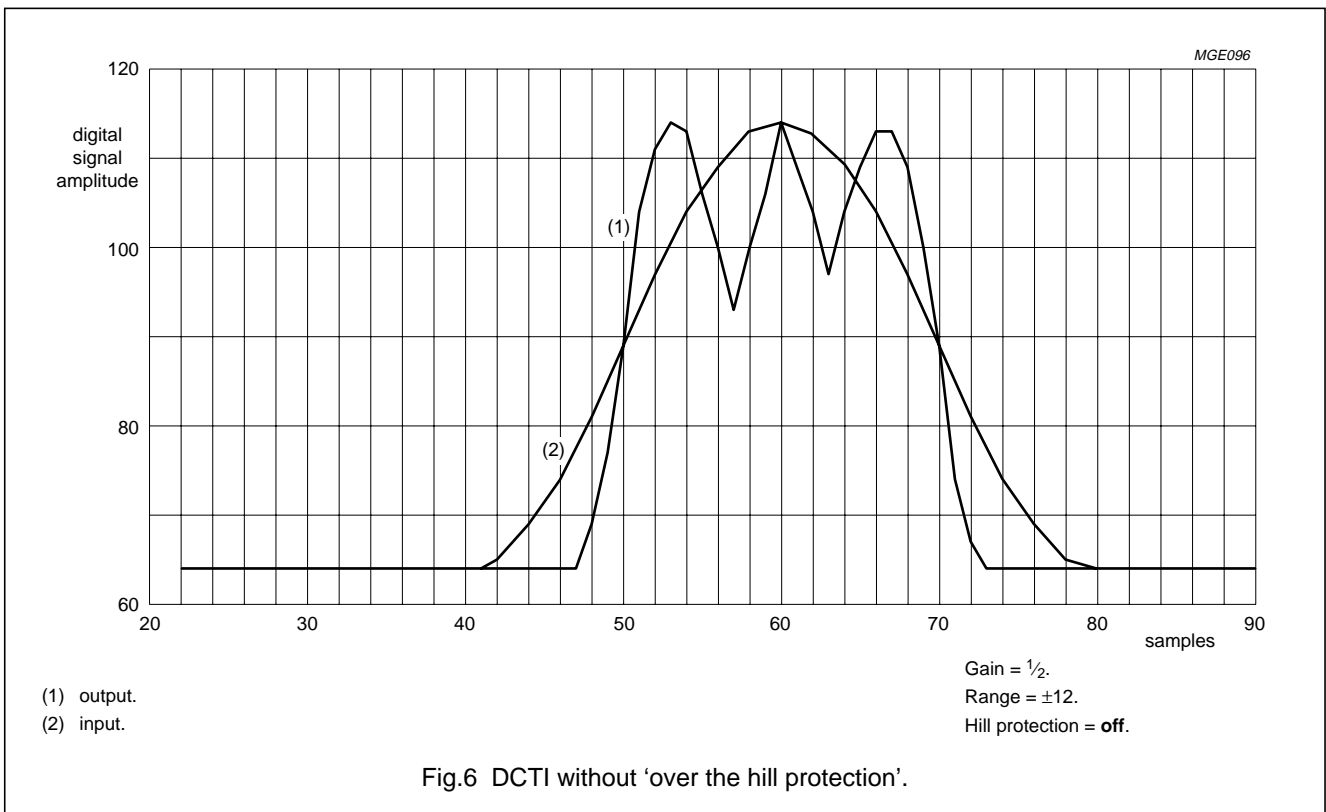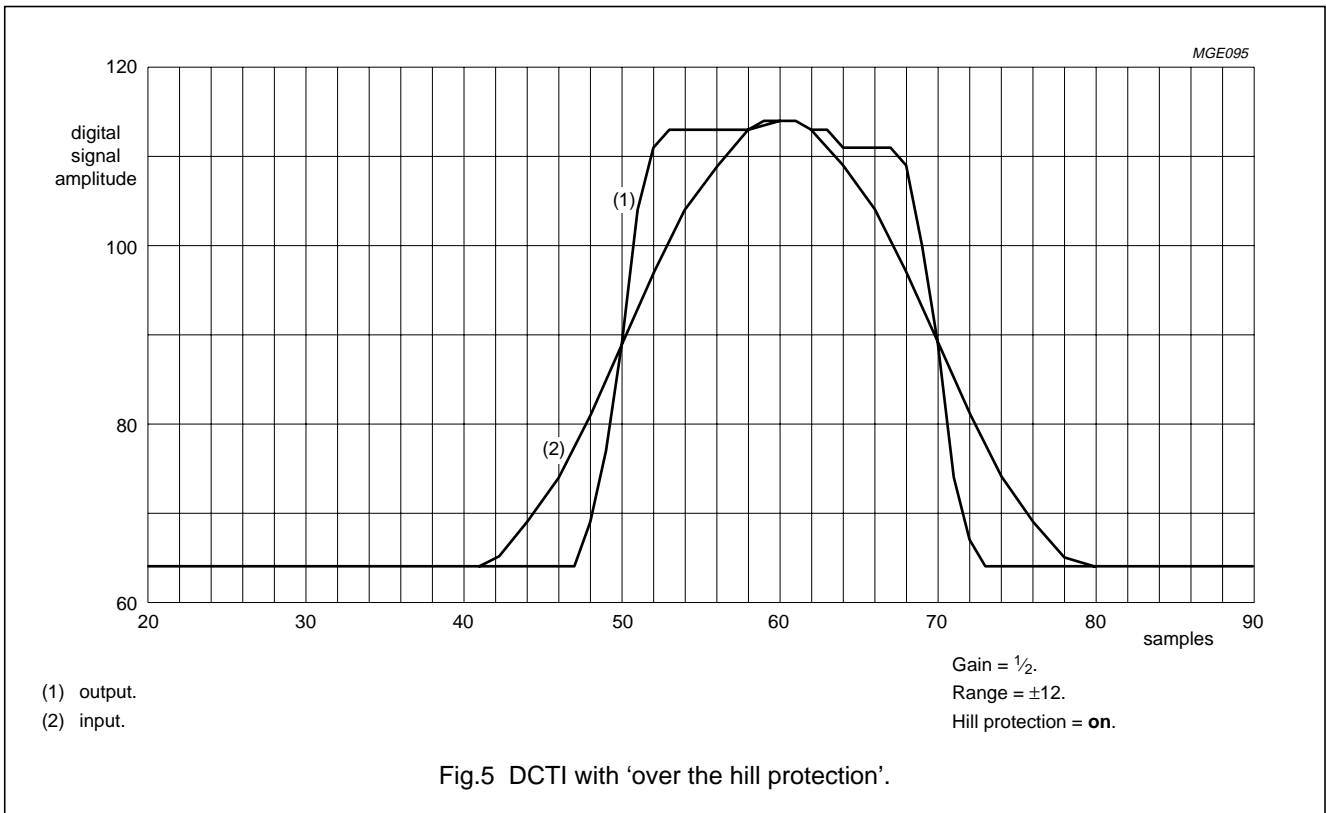

Economical video processing IC (ECOBENDIC)

SAA4970T

PEAKING



Peaking is implemented to obtain a higher gain in the middle and upper ranges of the luminance bandwidth. The filtering is an addition of:

- the original signal
- the original signal band-passed with centre frequency = $\frac{1}{4}f_s$
- the original signal high-passed with maximum gain at frequency = $\frac{1}{2}f_s$.

The band-passed and high-passed signals are weighted with factors 0, $\frac{1}{8}$, $\frac{1}{4}$ and $\frac{1}{2}$. The impulse response becomes $[-\alpha, -\beta, 1 + 2\alpha + 2\beta, -\beta, -\alpha]$, where α is the band-pass weighting factor and β the high-pass weighting factor.



Coring is added to obtain no gain for low amplitudes in the (high-pass + band-pass) signal, which is then considered to be noise. Coring levels can be programmed as 0 (**off**), +1/-2, +3/-4 and +7/-8 LSB at 10-bit word.

A limiter brings back the 11-bit range to a 9-bit range with a clipping function on the lower and upper side.

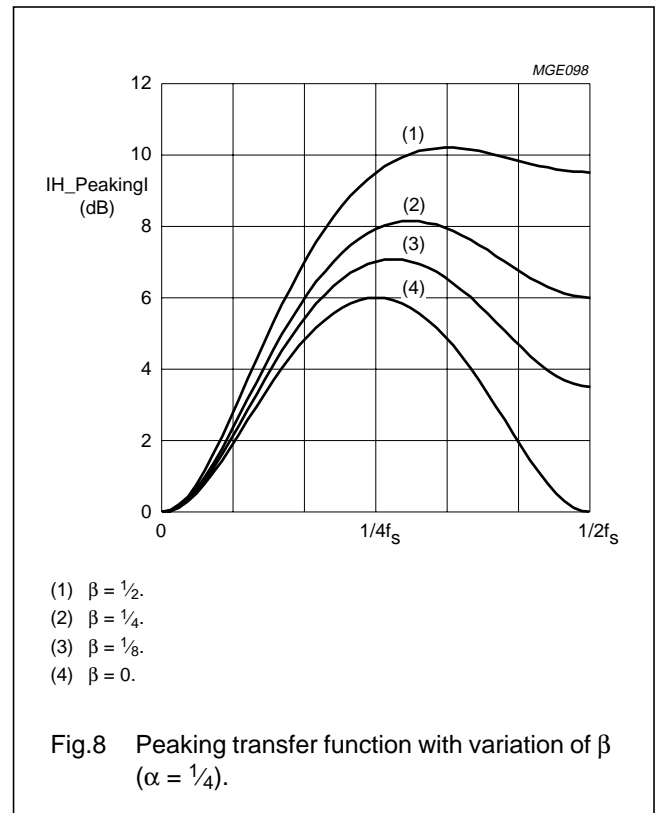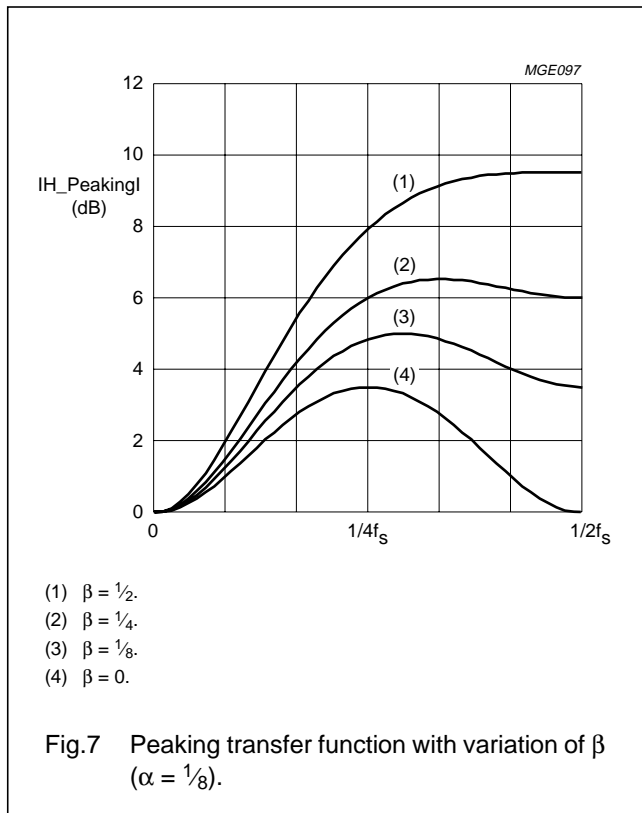


Economical video processing IC
(ECOBENDIC)

SAA4970T

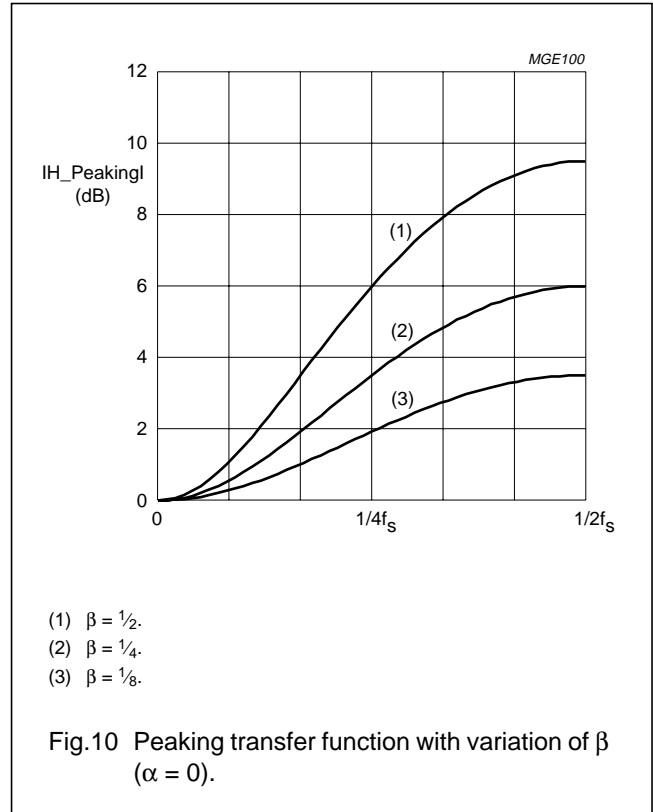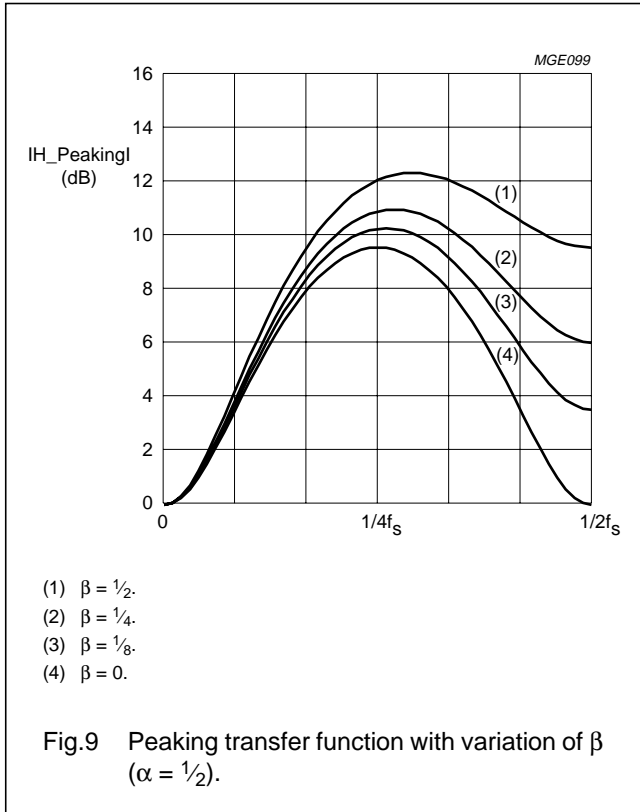

PHASE COMPENSATION

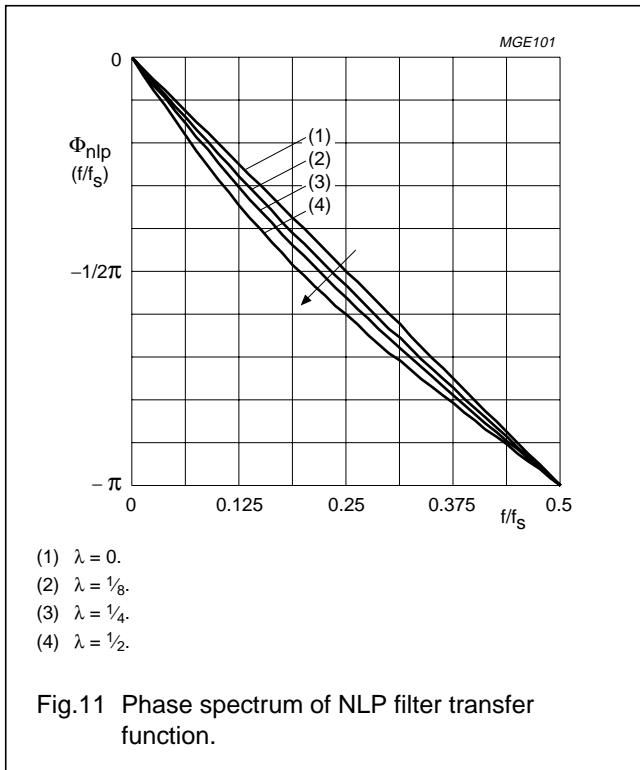

To compensate for a non-linear phase characteristic before the A/D converter, this filter will compensate such behaviour with a pulse response of $[-\lambda, 1 + \lambda]$. λ can be programmed for the values 0, 1/8, 1/4 and 1/2.

An 8-bit word width is re-obtained by means of clipping at 0 and 255.

FRAMING AND BLANKING

Blanking is done with switching Y to value 16 and UV to value 0 (in twos complement) on command of the BL signal.

Framing is done by switching Y and the higher nibble of U and V to certain programmable values (frame Y and frame UV) on command of the signal KAD.

If the pixel repetition function is chosen the last values from the video remain repeated instead of the fixed values.

The range of the output signal Y_O can be selected between 8 and 9 bits. In case of 8 bits for the nominal signal there is room left for under and overshoot (adding up to a total of 9 bits); in case of selecting all 9 bits of the luminance D/A converter for the nominal signal any under or overshoot will be clipped.

Economical video processing IC (ECOBENDIC)

SAA4970T

VARIABLE INPUT AND OUTPUT DELAYS

To obtain flexibility, a programmable delay difference between Y and UV can be made at both input and output.

At the input an almost symmetrical range of Y to UV delay can be made: -3 to +4 clock pulses.

At the output a range of Y to UV delay from -5 to +2 clock pulses can be made. When using e.g. scavenge circuitry, which has an additional external delay, the lower delays in Y are able to compensate this.

COLOUR REFORMATTING

The reformatter changes the DMSD 4 : 1 : 1 format UV signals into a sequential 8-bit U and V format according to the following scheme:

input:

U7, U5, U3, U1, U7, U5...etc.

U6, U4, U2, U0, U6, U4...etc.

V7, V5, V3, V1, V7, V5...etc.

V6, V4, V2, V0, V6, V4...etc.

output:

U7, V7, U7, V7...etc.

U6, V6, U6, V6...etc.

U5, V5, U5, V5...etc.

U4, V4, U4, V4...etc.

U3, V3, U3, V3...etc.

U2, V2, U2, V2...etc.

U1, V1, U1, V1...etc.

U0, V0, U0, V0...etc.

If the master clock frequency in the IC is 27 MHz then the data rate of the reformatter output is 13.5 MHz.

The signals UVbin and UV8bit, supplied by the microcontroller interface, select binary/twos complement mode and 8-bit/7-bit operation.

Economy Controller - Programmable Signal Positioner (ECO-PSP) control/microcontroller interface and sync processing

The control/microcontroller interface and sync processing part is designed as a separate unit called the ECO-PSP.

HORIZONTAL AND ACQUISITION BLOCK

CNT_A is an 8-bit counter, which counts up to 256 positions per acquisition video line. The cycle length of the counter is determined by either:

- an external reset (rising edge of R1) on every line or
- an internal reset, generated at a certain value of the counter itself.

For operation with the internal reset only, a value N in the 'reset CNT_A' register will result in an N + 1 length cycle. The R1 signal, generated by the ECO-PLL, should then be kept at a constant level. This however has not been foreseen in the ECO-PLL, so this mode of operation is not implied.

For operation with the external reset only, the 'reset CNT_A' register must be loaded with a value above the maximum line length. A value of FFH is suggested.

The VI1 input signal is monitored on its rising edge, with regard to the CNT_A momentary value. By reading out MUXA the positions of the edge becomes available for the microcontroller. If VI1 is the video field pulse, the position of the active edge within a video line becomes available. This indicates the interlace situation of the acquisition video signal. A window for discrimination of undesired VI1 edges is used. This window is made in the vertical acquisition block.

If a write to 'SAMPLE AQUI and DISPL' is done, MUXA will be loaded with the momentary CNT_A contents.

The PIP input signal is monitored on its edges, with regard to the CNT_A momentary values. If the PIP interrupt is enabled, an occurring rising edge will generate acquisition interrupt. By reading out MUXF and MUXG, the positions of the rising and falling edges become available for the microcontroller.

The internal acquisition gate pulses GA1, GA2 and GA3 (routed to CLMP, WE and IE) are set and reset at selectable CNT_A values. The sets of GA2 and GA3 have to be enabled by the vertical acquisition block. If the set and reset registers have equal contents, the signal will remain reset (reset overruling set).

The internal acquisition horizontal pulse HI is HIGH when the CNT_A contents are equal to a programmable value in the HI position register.

Economical video processing IC (ECOBENDIC)

SAA4970T

VERTICAL ACQUISITION BLOCK

CNT_B is a 9-bit counter, which counts to up to 512 lines per acquisition video field. The cycle length of the counter is determined by either:

- an external reset (rising edge of VI1) on every field or
- an internal reset, generated at a certain value of the counter itself, at the moment that the window is closed, without a VI1 rising edge having occurred during the window.

The counter value of CNT_B is monitored at the moment the VI1 rising edge is detected and can be read out from MUXB by the microcontroller. This value then indicates the number of lines in a video field. If the window is closed, without a VI1 rising edge having occurred during the window, MUXB will also be filled with the momentary contents of CNT_B.

If a write to 'SAMPLE AQUI and DISPL' is done, MUXB will be loaded with the momentary CNT_B contents.

An interrupt can be generated on a pre-defined acquisition line (Counter B-interrupt-Acquisition-b) by writing its line number to the 'set CB_intAb' register. If the interrupt is not desired, the register should be filled with a value above the 'reset window' register contents. The value 1FFH is suggested. Otherwise the interrupt may be disabled by bit 1 of the PLL control register (address 3D).

CNT_C is a 9-bit counter that resets to 0 at a pre-defined state of CNT_B. The internal 'Gate Enable' signal is then also set. 'Gate Enable' is reset at a pre-defined value of CNT_C. At that moment also an interrupt can be generated. If the interrupt is not desired, it can be disabled by bit 3 in the PLL control register.

HORIZONTAL DISPLAY BLOCK

CNT_F is an 8-bit counter, which counts up to 256 positions per display video line. The cycle length of the counter is determined by either:

- an external reset or a reset from the ECO-PLL (rising edge of R2) on every line or
- an internal reset, generated at a certain value of the counter itself.

For operation with the internal reset only, a value N in the 'reset CNT_F' register will result in an N + 1 length cycle. The R2 input should now be kept HIGH or LOW. This means in the ECOBENDIC the R2 output from the ECO-PLL 3-state and the R2 signal will externally be kept HIGH or LOW.

For operation with the external reset only, the 'reset CNT_F' register must be loaded with a value above the maximum line length. A value of FFH is suggested.

Whenever CNT_F is reset, the internal display horizontal pulse HU is generated.

The signals BL, H2, KAD and internally GD (which becomes RE in the gates block) have programmable sets and resets, and can therefore have rising and falling edges at any desired CNT_F value. If the set and reset registers have equal contents, the signal will remain reset (reset overruling set). To keep the signals set, the reset register should remain above the maximum CNT_A value, while the set value is within the CNT_A cycle range. The GD has two pairs of set/reset registers, and can generate 4 edges per line instead of 2. The KAD has three pairs of set/reset registers, and can generate 6 edges per line instead of 2. The GD pulse has a programmable fine shift of 0, 1, 2 or 3 CK2 pulses on both of its edges.

All the horizontal display output signals have enables on the sets and resets. These enables will be effectively changed only at the occurrence of the internal horizontal HU pulse. Therefore it is possible to set up various signal edges slowly by the microcontroller and effectuate them all at once in a certain video line.

The VI2 input/output signal is monitored on its rising edge, with regard to the CNT_F momentary value. By reading out MUXD, the position of the edge becomes available for the microcontroller. If VI2 is the video field pulse, the position of the active edge within a video line becomes available. This indicates the interlace situation of the display video signal.

If a write to 'SAMPLE AQUI and DISPL' is done, MUXD will be loaded with the momentary CNT_F contents.

If VI2 is used as an output, the 'VHU register/comparator' generates a line frequent pulse that is used in the vertical display block for the timing of the VI2 edges within the lines.

VERTICAL DISPLAY BLOCK

CNT_D is a 9-bit counter, which counts to maximum 512 lines per display video field. The cycle length of the counter is determined by a reset action from the microcontroller, i.e. writing to address 14H.

The counter value of CNT_D is monitored at the moment the VI2 rising edge is detected and can be read out from MUXE by the microcontroller. This value then indicates the number of lines in a video field.

Economical video processing IC (ECOBENDIC)

SAA4970T

If a write to 'SAMPLE AQU1 and DISPL' is done, MUXE will be loaded with the momentary CNT_D contents.

An interrupt can be generated on a pre-defined display line (Counter D-interrupt-Display-b) by writing its line number to the 'set CD_intDb' register. If the interrupt is not desired, the register should be filled with a value above the maximum number of display lines. The value 1FFH is suggested.

If VI2 is used as an output, the falling edge can be activated by addressing the 'start flyback' register and the rising edge by addressing the 'start scan' register. In the 'horizontal display block' a pulse is generated with the 'VHU register/comparator'. This pulse is used for the timing of the edges within the lines. This gives the ability to determine the interlace of the display and is continuously variable. It is useful to use the display interrupt to trigger the microcontroller for issuing the flyback and scan edges in a certain display line.

GATES BLOCK

The internal signals 'Gate Acquisition 1' (GA1), 'Gate Acquisition 2' (GA2), 'Gate Acquisition 3' (GA3) and 'Gate Display' (GD) are fed through shift stages, which are programmed to shift the rising and falling edges 0, 1, 2 or 3 input clock periods. For GA1, GA2 and GA3 the shift is in CK1 periods; for GD the shift is in CK2 periods.

The construction of the shifts makes it possible to generate the gate outputs with higher resolution than the other signals. If $MC1 = \frac{1}{4}CK1$ and $MC2 = \frac{1}{4}CK2$, any position of the edges is possible with a resolution of CK1 and CK2 clock period.

ACQUISITION AND DISPLAY INTERRUPTS BLOCKS

As described in the acquisition and display vertical blocks, on programmed positions of CNT_B, CNT_C and CNT_D interrupts are generated. Also, as described in the horizontal acquisition block, an interrupt may be generated on a rising edge of the PIP signal.

The PIP related interrupt and the 'gate input, CNT_C' related interrupt can be enabled or disabled by bits in the PLL control register.

The status of each interrupt is separately held in a flip-flop. The interrupt status flip-flops can all be monitored by reading MUXC.

To reset any of the interrupts, the flip-flops can be reset individually by addressing their reset interrupt address.

The interrupts are grouped into two output signals: IT1 is a combination of all acquisition related interrupts, while IT2 is the only display related interrupt.

ACQUISITION AND DISPLAY CLOCK BLOCKS

The CK1 and CK2 input clock signals are divided into div1 or div4 signals (internal clock signals), where div1 is only meant for testing purposes. The divided clocks are multiplexed to MC1 and MC2.

The multiplexer select states for MC1 and MC2 are programmed in the internal control register.

MICROCONTROLLER INTERFACE BLOCK

The microcontroller interface consists of an addressing, a read and a write part.

The **addressing** is performed with an address latch, that latches the address/data bus while 'address latch enable' is active (HIGH).

Writing data to any destination in the ECO-PSP consists of two activities:

1. The address in the address latch is converted to an enable signal for the destination in question. This enable is activated while WRN is active (LOW).
2. The 8-bit data on the address/data bus is merged with a 9th bit, which is the highest bit (bit 7) of the address latch. This resulting 9-bit data is sent to registers in the various blocks. Most registers only use 8 bits of data, in that case the 9th bit is a 'don't care'.

Writing to 7 addresses simultaneously is possible by supplying an address in the range of 00H to 07H. All the destinations in the column of that address in the write table are then supplied with the same data.

The destinations in the ECO-PSP may be: 9-bit registers, 8-bit registers, counter resets, interrupt resets, gate output selects and the acquisition and display function.

Reading data from one of the 7 readable registers also consists of two activities:

1. The address in the address latch is converted to a multiplexer setting for the source in question.
2. The 8-bit data from the source 3-state enabled to the address/data bus. If a 9-bit register is read out, the highest bit (bit 8) is coded in the MUXC source.

The seven sources in the ECO-PSP are described in the read table.

Economical video processing IC (ECOBENDIC)

SAA4970T

ECO-PLL

In the PLL block, 3 functions are performed with the following sub-blocks:

- Crystal oscillator
- PLL core
- Clock and R1 divider for multi picture.

CRYSTAL OSCILLATOR

The crystal oscillator should drive an external 12 MHz crystal used in the watchdog and externally by e.g. the microcontroller.

PLL CORE

In the PLL core, line locked clocks are made for both the acquisition and display sides of the double scan conversion circuits. The PLL can lock its outputs to an externally applied Hs 16 kHz line pulse. The outputs are:

- CK2, the display clock
- CL1, the (basic) acquisition clock
- R2, the display 32 kHz line frequent pulse
- RL1, the (basic) 16 kHz line frequent pulse.

The CK2 frequency relates to the Hs frequency with a factor determined by PLL_div:

$$\text{PLL_div} = 0 \rightarrow \text{CK2} = 2 \times 1024 \times \text{Hs} \text{ (nominal 32 MHz)}$$

$$\text{PLL_div} = 1 \rightarrow \text{CK2} = 2 \times 864 \times \text{Hs} \text{ (nominal 27 MHz)}$$

$$\text{PLL_div} = 2 \rightarrow \text{CK2} = 2 \times 768 \times \text{Hs} \text{ (nominal 24 MHz)}$$

$$\text{PLL_div} = 3 \rightarrow \text{CK2} = 2 \times 648 \times \text{Hs} \text{ (nominal 20.25 MHz).}$$

The C_p and C_i settings in the PLL2 control byte correspond to coefficients in the proportional and integrating parts of the PLL control loop.

The actual proportional coefficient is $2^{-(C_p + 1)}$. With C_p ranging from 0 to 7, $2^{-(C_p + 1)}$ ranges from $\frac{1}{2}$ to $\frac{1}{256}$.

The actual integrating coefficient is $2^{-(C_i + 2)}$. With C_i ranging from 0 to 15, $2^{-(C_i + 2)}$ ranges from $\frac{1}{4}$ to $\frac{1}{131072}$.

The PLL core itself is driven by the 12 MHz signal from the crystal oscillator.

The PLL can be set to lock upon the Hs signal, or to run free at a fixed frequency or at the last frequency during lock.

In normal operation the PLL locks to the Hs signal.

The win_PLL signal from the PSP part of the ECOBENDIC windows the part of the picture where a VCR phase disturbance might occur. This is normally part of the vertical blanking period, but with the double scan conversion and a single acquisition/display clock system, it would become visible in the lower part of the picture as bottom flutter. Therefore, with win_PLL active, the frequencies generated by the PLL remain fixed at the last frequencies during lock.

When the control bit 'free run' is active, a fixed frequency will be produced, determined by the setting of PLL_div. PLL_div = 0 gives 32 MHz, PLL_div = 1 gives 27 MHz, PLL_div = 2 gives 24 MHz and PLL_div = 3 gives 20.25 MHz on the display clock CK2.

CLOCK AND R1 DIVIDER FOR MULTI PICTURE

To make simple multi picture processing, it is possible to reduce the clock rate at the acquisition side by a factor 2 or 3.

Suppose, a factor of 3 is chosen. Then, $\frac{1}{3}$ of the memory data that is normally written by 1 line of video will now be written by 3 lines of the input video. If writing to the memory is only enabled for a chosen $\frac{1}{3}$ of this period, a desired part of the video line to be displayed is updated with a compressed line of input video. After a cycle of 3 input lines, the write pointer of the memory is located on a position, that will be displayed exactly 1 line below. For this essential cycle of 3 input lines, also the 16 kHz RL1 pulse must be frequency divided by 3.

USE OF INTERNAL AND EXTERNAL PLL CIRCUITS

The ECOBENDIC is designed primarily for use with its internal (ECO)PLL circuit, providing a one clock system for acquisition and display. It is however possible to use external PLL circuits for either the acquisition or the display side or both. E.g. for use in a 16 : 9 TV-set, at least one external PLL circuit is necessary to perform horizontal compression of any 4 : 3 program material.

To assist any external PLL function, use can be made of the clock to line pulse dividers in the ECO-PSP and 3-state switching on the output of such pulse, switching by the H_A input. This may provide a VCO control voltage, if combined with an RC filter.

Economical video processing IC (ECOBENDIC)

SAA4970T

ECO-WATCHDOG

The function of the watchdog is to reset the microcontroller if it is not running the application properly. For this purpose, the microcontroller program checks upon correct operation and in case this is OK, it will periodically generate a toggle of the BONE signal.

The watchdog will keep quiet as long as this toggling interval is not longer than the duration of the watchdogs "bone-edge to reset" time. The reset pulse is designed to be long enough (32 XtalUP cycles) for the microcontroller to reset, but must not remain active (HIGH) indefinitely. Otherwise the microcontroller would be hung up in its reset operation.

Control facilities

Table 1 Registers of the ECOBENDIC

| REGISTER | BIT | NAME | FUNCTION |
|----------------------------------------------|---------|----------------------|----------------------------------------------------------------------------|
| Registers 00H to 07H (column set) | | | |
| 00H | 0 to 7 | | set all registers of columns 0XH and 8XH |
| 01H | 0 to 7 | | set all registers of columns 1XH and 9XH |
| 02H | 0 to 7 | | set all registers of columns 2XH and AXH |
| 03H | 0 to 7 | | set all registers of columns 3XH and BXH |
| 04H | 0 to 7 | | set all registers of columns 4XH and CXH |
| 05H | 0 to 7 | | set all registers of columns 5XH and DXH |
| 06H | 0 to 7 | | set all registers of columns 6XH and EXH |
| 07H | 0 to 7 | | set all registers of columns 7XH and FXH |
| Registers 08H and 09H (blanking) | | | |
| 08H | 0 to 7 | set blanking | sets rising edge of signal BL when register data = CNT_F |
| 09H | 0 to 7 | reset blanking | sets falling edge of signal BL when register data = CNT_F |
| Registers 0AH and 0BH (interrupt) | | | |
| 0AH | 0 to 8 | set CB_intAb | CNT_B value when Acquisition B Interrupt (CB_intAb) is triggered |
| 0BH | 0 to 8 | set CD_intDb | CNT_D value when Display Interrupt (CD_intDb) is triggered |
| Register 0CH (YUV control) | | | |
| 0CH | 0 | phase compensation | λ value for phase compensation filter, bit 0 |
| | 1 | | λ value for phase compensation filter, bit 1 |
| | 2 | | not used |
| | 3 | Y OUT | Y clipping, 0 = off , 1 = on |
| | 4 | inv_UV | inverts UV signals after UV processing; 0 = no inversion, 1 = inversion |
| | 5 | UVbin | reformatter; 1 = binary, 0 = twos complement |
| | 6 | UV8bit | reformatter; 1 = 8-bit quantization, 0 = 7-bit quantization |
| | 7 | Sel_PixRep | 1 = pixel repetition, 0 = constant colour for framing |
| Registers 0DH and 0EH (H2 generation) | | | |
| 0DH | no data | update start scan | after addressing rising edge of H2 is set |
| 0EH | no data | update start flyback | after addressing falling edge of H2 is set |

Economical video processing IC (ECOBENDIC)

SAA4970T

| REGISTER | BIT | NAME | FUNCTION |
|-------------------------------------------------|---------|----------------------|---------------------------------------------------------------------|
| Register 0FH (internal control register) | | | |
| 0FH | 0 | | not used |
| | 1 | VI1_Hs output enable | enables internal generation of VI1 and Hs signals (= 1) |
| | 2 | MC1_select | selects clock rate of MC1; 1: MC1 = $\frac{1}{4}$ CK1; 0: MC1 = CK1 |
| | 3 | MC2_select | selects clock rate of MC2; 1: MC2 = $\frac{1}{4}$ CK2; 0: MC2 = CK2 |
| | 4 | VI2 output enable | enables internal generation of VI2 (= 1) |
| | 5 | | 0 |
| | 6 | | 0 |
| | 7 | CNT_D reset enable | enables reset of CNT_D by VI2 (= 1) |
| Registers 10H and 11H (H2) | | | |
| 10H | 0 to 7 | set H2 | CNT_F value when rising edge of signal H2 occurs |
| 11H | 0 to 7 | reset H2 | CNT_F value when falling edge of signal H2 occurs |
| Register 12H (reset CNT_C) | | | |
| 12H | 0 to 8 | reset CNT_C | resets CNT_C when register data = CNT_B |
| Register 13H (peaking) | | | |
| 13H | 0 | Alpha | α , bit 0; see Table 2 |
| | 1 | | α , bit 1; see Table 2 |
| | 2 | Beta | β , bit 0; see Table 3 |
| | 3 | | β , bit 1; see Table 3 |
| | 4 | Coring | coring value, bit 0; see Table 4 |
| | 5 | | coring value, bit 1; see Table 4 |
| | 6 | | not used |
| | 7 | | not used |
| Register 14H (reset CNT_D) | | | |
| 14H | no data | reset CNT_D | resets CNT_D when address 14H is sent |
| Register 15H (DCTI) | | | |
| 15H | 0 | DCTI range | K range, bit 0; see Table 5 |
| | 1 | | K range, bit 1; see Table 5 |
| | 2 | DCTI gain | K gain, bit 0; see Table 6 |
| | 3 | | K gain, bit 1; see Table 6 |
| | 4 | hill_protect | over the hill protection; 1 = on , 0 = off |
| | 5 | | not used |
| | 6 | | not used |
| | 7 | | not used |
| Register 16H (frame Y) | | | |
| 16H | 0 to 7 | frame Y | frame grey level = 128 + register data (128 to 383) |

Economical video processing IC (ECOBENDIC)

SAA4970T

| REGISTER | BIT | NAME | FUNCTION |
|--------------------------------------|--------|------------------|------------------------------------------------------------------|
| Register 17H (RE EN's SR) | | | |
| 17H | 0 | enable set 1 | enables setting of rising edge 1 of RE |
| | 1 | enable set 2 | enables setting of rising edge 2 of RE |
| | 2 | enable reset 1 | enables setting of falling edge 1 of RE |
| | 3 | enable reset 2 | enables setting of falling edge 2 of RE |
| | 4 | | not used |
| | 5 | | not used |
| | 6 | | not used |
| | 7 | | not used |
| Registers 18H and 19H (KADer) | | | |
| 18H | 0 to 7 | set 3 KAD | sets third rising edge of KAD signal when register data = CNT_F |
| 19H | 0 to 7 | reset 3 KAD | sets third falling edge of KAD signal when register data = CNT_F |
| Register 1AH (update Len GE) | | | |
| 1AH | 0 to 8 | update Len GE | sets rising edge of GE signal when register data = CNT_C |
| Register 1BH (reset CNT_F) | | | |
| 1BH | 0 to 7 | reset CNT_F | resets CNT_F when register data = CNT_F |
| Register 1DH (frame UV) | | | |
| 1DH | 0 | frame U | frame U level (0 to 15), bit 0 |
| | 1 | | frame U level (0 to 15), bit 1 |
| | 2 | | frame U level (0 to 15), bit 2 |
| | 3 | | frame U level (0 to 15), bit 3 |
| | 4 | frame V | frame V level (0 to 15), bit 0 |
| | 5 | | frame V level (0 to 15), bit 1 |
| | 6 | | frame V level (0 to 15), bit 2 |
| | 7 | | frame V level (0 to 15), bit 3 |
| Register 1EH (delay) | | | |
| 1EH | 0 | MC2_PROC module | delay of MC2, bit 0 |
| | 1 | | delay of MC2, bit 1 |
| | 2 | OUT_DELAY module | delay of UV against Y signal, bit 0; see Table 8 |
| | 3 | | delay of UV against Y signal, bit 1; see Table 8 |
| | 4 | | delay of UV against Y signal, bit 2; see Table 8 |
| | 5 | IN_DELAY module | delay of Y signal against UV signals, bit 0; see Table 9 |
| | 6 | | delay of Y signal against UV signals, bit 1; see Table 9 |
| | 7 | | delay of Y signal against UV signals, bit 2; see Table 9 |

Economical video processing IC (ECOBENDIC)

SAA4970T

| REGISTER | BIT | NAME | FUNCTION |
|--------------------------------------|--------|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Register 1FH (BL, H2 EN's SR) | | | |
| 1FH | 0 | enable set BL | enables rising edge of BL |
| | 1 | enable reset BL | enables falling edge of BL |
| | 2 | enable set H2 | enables rising edge of H2 |
| | 3 | enable reset H2 | enables falling edge of H2 |
| | 4 | | not used |
| | 5 | | not used |
| | 6 | | not used |
| | 7 | | not used |
| Registers 20H and 21H (PLL) | | | |
| 20H | 0 | PLL_CORE control | 1 = free-run mode: not line-locked CK1/2 generation 0 = locked mode: CK1/CK2 generation is line-locked by Hs |
| | 1 | | if free-run mode (else don't care): 1 = last frequency: generates last frequency in locked mode 0 = fixed frequency: CK1/CK2 rate is determined by PLL_div |
| | 2 | | PLL_div, bit 0; see Table 10 |
| | 3 | | PLL_div, bit 1; see Table 10 |
| | 4 | | 0 (test bit) |
| | 5 | DIV123 control | MPIP processing; specifies dividing of CK1 and R1; $CK1_{PLL_CORE} = \frac{1}{2}CK2$; $CK1 = div \times CK1_{PLL_CORE}$; $R1 = div \times 16 \text{ kHz (RL1)}$; bit 0; see Table 7 |
| | 6 | | MPIP processing; specifies dividing of CK1 and R1; $CK1_{PLL_CORE} = \frac{1}{2}CK2$; $CK1 = div \times CK1_{PLL_CORE}$; $R1 = div \times 16 \text{ kHz (RL1)}$; bit 1; see Table 7 |
| | 7 | VI1 synchronized | R1 is synchronized by VI1 (= 1); no synchronisation (= 0) |
| 21H | 0 | n | coefficient n of PI filter ($C_p = 2^{-(n+1)}$), bit 0 |
| | 1 | | coefficient n of PI filter ($C_p = 2^{-(n+1)}$), bit 1 |
| | 2 | | coefficient n of PI filter ($C_p = 2^{-(n+1)}$), bit 2 |
| | 3 | m | coefficient m of PI filter ($C_i = 2^{-(m+2)}$), bit 0 |
| | 4 | | coefficient m of PI filter ($C_i = 2^{-(m+2)}$), bit 1 |
| | 5 | | coefficient m of PI filter ($C_i = 2^{-(m+2)}$), bit 2 |
| | 6 | | coefficient m of PI filter ($C_i = 2^{-(m+2)}$), bit 3 |
| | 7 | | 1 |
| Register 22H (update HI pos) | | | |
| 22H | 0 to 7 | update HI pos | when register data = CNT_A then signal HI is set and CNT_B and CNT_C are incremented |
| Register 23H (reset CNT_A) | | | |
| 23H | 0 to 7 | reset CNT_A | resets CNT_A when register data = CNT_A; generation of R1 output signal, if en_R1_out = 1 and oe_CK1 = 0 |
| Register 24H (reset GI_intAa) | | | |
| 24H | 0 to 7 | reset GI_intAa | resets Blanking-Acquisition-Interrupt |

Economical video processing IC (ECOBENDIC)

SAA4970T

| REGISTER | BIT | NAME | FUNCTION |
|------------------------------------------------|---------|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Register 25H (update G_shifts1) | | | |
| 25H | 0 | fine shift CLMP | fine shift of CLMP, bit 0 |
| | 1 | | fine shift of CLMP, bit 1 |
| | 2 | fine shift WE | fine shift of WE, bit 0 |
| | 3 | | fine shift of WE, bit 1 |
| | 4 | fine shift IE | fine shift of IE, bit 0 |
| | 5 | | fine shift of IE, bit 1 |
| | 6 | fine shift RE | fine shift of RE, bit 0 |
| | 7 | | fine shift of RE, bit 1 |
| Register 26H (SAMPLE AQU1 and DISPL) | | | |
| 26H | 0 to 7 | SAMPLE AQU1 and DISPL | fills current value of CNT_A, CNT_B, CNT_D and CNT_F into MUXA, MUXB, MUXE and MUXD (9th bit (MSB, bit 8) of CNT_B into bit 4 of MUXC, 9th bit (MSB, bit 8) of CNT_D into bit 6 of MUXC) when address 26H is sent |
| Register 27H (KADer EN's SR) | | | |
| 27H | 0 | enable set 1 | enables first rising edge of KAD signal |
| | 1 | enable set 2 | enables first falling edge of KAD signal |
| | 2 | enable reset 1 | enables second rising edge of KAD signal |
| | 3 | enable reset 2 | enables second falling edge of KAD signal |
| | 4 | enable set 3 | enables third rising edge of KAD signal |
| | 5 | enable reset 3 | enables third falling edge of KAD signal |
| | 6 | | not used |
| | 7 | | not used |
| Registers 28H, 29H, 2AH and 2BH (KADer) | | | |
| 28H | 0 to 7 | set 1 | sets first rising edge of KAD signal when register data = CNT_F |
| 29H | 0 to 7 | reset 1 | sets first falling edge of KAD signal when register data = CNT_F |
| 2AH | 0 to 7 | set 2 | sets second rising edge of KAD signal when register data = CNT_F |
| 2BH | 0 to 7 | reset 2 | sets second falling edge of KAD signal when register data = CNT_F |
| Registers 2CH and 2DH (resets) | | | |
| 2CH | no data | reset CB_intAb | resets interrupt CB_intAb when address 2C is sent |
| 2DH | no data | reset PIP_intAc | resets interrupt PIP_intAc when address 2D is sent |
| Registers 2EH and 2FH (window) | | | |
| 2EH | 0 to 8 | set window | sets rising edge of WINDOW signal when register data = CNT_B |
| 2FH | 0 to 8 | reset window | sets falling edge of WINDOW signal when register data = CNT_B |
| Registers 30H, 31H, 32H and 33H (RE) | | | |
| 30H | 0 to 7 | set 1 | sets first rising edge of RE signal when register data = CNT_F |
| 31H | 0 to 7 | reset 1 | sets first falling edge of RE signal when register data = CNT_F |
| 32H | 0 to 7 | set 2 | sets second rising edge of RE signal when register data = CNT_F |
| 33H | 0 to 7 | reset 2 | sets second falling edge of RE signal when register data = CNT_F |

Economical video processing IC (ECOBENDIC)

SAA4970T

| REGISTER | BIT | NAME | FUNCTION |
|---------------------------------------------|--------|-------------------------|----------------------------------------------------------------------------------------------|
| Register 34H (reset CD_intDb) | | | |
| 34H | 0 to 7 | reset CD_intDb | resets interrupt CD_intDb when address 34H is sent |
| Register 35H (set IE) | | | |
| 35H | 0 to 7 | set IE | sets rising edge of IE signal when register data = CNT_A |
| Registers 36H and 37H (win_PLL) | | | |
| 36H | 0 to 8 | set win_PLL | sets rising edge of win_PLL signal when register data = CNT_D |
| 37H | 0 to 8 | reset win_PLL | sets falling edge of win_PLL signal when register data = CNT_D |
| Registers 38H and 39H (WE) | | | |
| 38H | 0 to 7 | set WE | sets rising edge of WE signal when register data = CNT_A |
| 39H | 0 to 7 | reset WE | sets falling edge of WE signal when register data = CNT_A |
| Register 3AH (reset IE) | | | |
| 3AH | 0 to 7 | reset IE | sets falling edge of IE signal when register data = CNT_A |
| Register 3BH (update VHU register) | | | |
| 3BH | 0 to 7 | update VHU register | sets rising or falling edge of VI2 when register data = CNT_F and address 0DH or 0EH is sent |
| Register 3DH (interrupt + R1R2_cntr) | | | |
| 3DH | 0 | | 0 |
| | 1 | Interrupt Control (IT1) | enables interrupt CB_intAb |
| | 2 | | enables interrupt PIP_intAc |
| | 3 | | enables interrupt Gi_intAa |
| | 4 | en_R1_out | output enable R1 |
| | 5 | oe_CK1 | output enable CK1 |
| | 6 | en_R2_out | output enable R2 |
| | 7 | oe_CK2 | output enable CK2 |
| Registers 3EH and 3FH (CLMP) | | | |
| 3EH | 0 to 7 | set CLMP | sets rising edge of CLMP signal when register data = CNT_A |
| 3FH | 0 to 7 | reset CLMP | sets falling edge of CLMP signal when register data = CNT_A |

Table 2 α value

| BIT 1 | BIT 0 | α VALUE |
|-------|-------|----------------|
| 0 | 0 | 0 |
| 0 | 1 | $\frac{1}{8}$ |
| 1 | 0 | $\frac{1}{4}$ |
| 1 | 1 | $\frac{1}{2}$ |

Table 3 β value

| BIT 1 | BIT 0 | β VALUE |
|-------|-------|---------------|
| 0 | 0 | 0 |
| 0 | 1 | $\frac{1}{8}$ |
| 1 | 0 | $\frac{1}{4}$ |
| 1 | 1 | $\frac{1}{2}$ |

Economical video processing IC (ECOBENDIC)

SAA4970T

Table 4 Coring value

| BIT 1 | BIT 0 | CORING RANGE |
|-------|-------|--------------|
| 0 | 0 | +1 to -2 |
| 0 | 1 | +3 to -4 |
| 1 | 0 | +7 to -8 |

Table 5 K range

| BIT 1 | BIT 0 | RANGE |
|-------|-------|----------------|
| 0 | 0 | ± 4 |
| 0 | 1 | ± 6 |
| 1 | 0 | ± 8 |
| 1 | 1 | $\pm 12^{(1)}$ |

Note

1. Not useful for PAL.

Table 6 K gain

| BIT 1 | BIT 0 | GAIN |
|-------|-------|---------------|
| 0 | 0 | 0 |
| 0 | 1 | $\frac{1}{4}$ |
| 1 | 0 | $\frac{1}{2}$ |
| 1 | 1 | 1 |

Table 7 DIV123 control

| BIT 1 | BIT 0 | DIV |
|-------|-------|---------------|
| 0 | 0 | 1 |
| 0 | 1 | $\frac{1}{2}$ |
| 1 | 0 | $\frac{1}{3}$ |
| 1 | 1 | $\frac{1}{3}$ |

Table 8 UV delay

| BIT 2 | BIT 1 | BIT 0 | UV DELAY |
|-------|-------|-------|----------|
| 0 | 0 | 0 | -2 |
| 0 | 0 | 1 | -1 |
| 0 | 1 | 0 | 0 |
| 0 | 1 | 1 | 1 |
| 1 | 0 | 0 | 2 |
| 1 | 0 | 1 | 3 |
| 1 | 1 | 0 | 4 |
| 1 | 1 | 1 | 5 |

Table 9 Y delay

| BIT 2 | BIT 1 | BIT 0 | DELAY |
|-------|-------|-------|-------|
| 0 | 0 | 0 | -3 |
| 0 | 0 | 1 | -2 |
| 0 | 1 | 0 | -1 |
| 0 | 1 | 1 | 0 |
| 1 | 0 | 0 | 1 |
| 1 | 0 | 1 | 2 |
| 1 | 1 | 0 | 3 |
| 1 | 1 | 1 | 4 |

Table 10 PLL_div

| BIT 1 | BIT 0 | PIXEL PER LINE TO OBTAIN DISPLAY CLOCK CK2 FROM Hs |
|-------|-------|----------------------------------------------------|
| 0 | 0 | CK2 = $2 \times 1024 \times Hs$ (32 MHz) |
| 0 | 1 | CK2 = $2 \times 864 \times Hs$ (27 MHz) |
| 1 | 0 | CK2 = $2 \times 768 \times Hs$ (24 MHz) |
| 1 | 1 | CK2 = $2 \times 648 \times Hs$ (20.25 MHz) |

Read table

DETECTION OF ACQUISITION POSITION

MUXB/MUXA are filled with current counter values of CNT_B/CNT_A (horizontal and vertical acquisition position) by a positive edge of VI1 or using 'SAMPLE AQU' and DISPL' register. Thus, it is possible to detect the location of VI1 within one line by reading MUXB (CNT_B) after VI1 has occurred.

address XXXX XX11 (03H) **MUXA** sampled CNT_A value

address XXXX XX10 (02H) **MUXB** sampled CNT_B value

address XXXX XX01 (01H) **MUXC** bit 4:
9th-bit (MSB) of sampled CNT_B.

MUXF/MUXG are filled with current counter values of CNT_A (horizontal acquisition position) if positive/negative edge of PIP signal occurs.

address XXXX 1000 (08H) **MUXF** sampled CNT_A value by rising PIP edge

address XXXX 1100 (0CH) **MUXG** sampled CNT_A value by falling PIP edge.

Economical video processing IC (ECOBENDIC)

SAA4970T

DETECTION OF DISPLAY POSITION

MUXD/MUXE are filled with current counter values of CNT_F/CNT_D (horizontal and vertical display position) by a positive edge of VI2 or using the 'SAMPLE AQUI and DISPL' register. Thus, it is possible to detect the location of VI2 within one line by reading MUXD (CNT_F) after VI2 has occurred.

address XXXX 0000 (00H) **MUXD** sampled CNT_F value

address XXXX 0100 (04H) **MUXE** sampled CNT_D value

address XXXX XX01 (01H) **MUXC** bit 6:
9th bit (MSB) of sampled CNT_D.

INTERRUPT STATUS

address XXXX XX01 (01H) **MUXC** IT1 bit 0:
status of CB_intAb (1 = active)

address XXXX XX01 (01H) **MUXC** bit 1:
status of GI_intAa

address XXXX XX01 (01H) **MUXC** bit 2:
status of PIP_intAc

address XXXX XX01 (01H) **MUXC** IT2 bit 3:
status of CD_intDb.

GATE ENABLE (GE) STATUS

address XXXX XX01 (01H) **MUXC** bit 5:
status of GE (1 = enabled).

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

| SYMBOL | PARAMETER | MIN. | MAX. | UNIT |
|--------------------|----------------------------------------------------------------|------|------|------|
| V _I | input voltage protection range | -0.5 | +7 | V |
| V _{DD} | digital supply voltage (pin 42 versus pins 43 and 52) | - | 5.5 | V |
| V _{CC} | supply voltage analog buffer (pins 6 and 10 versus pin 4) | - | 5.5 | V |
| V _{ref} | supply voltage analog reference (pins 6 and 9 versus pin 4) | - | 5.25 | V |
| I _o | output current | | | |
| | pins 51 and 53 versus pins 43 and 52 | - | 16 | mA |
| | pins 29 to 36, 11, 12, 19, 20, 25 and 26 versus pins 43 and 52 | - | 4 | mA |
| | pins 18, 22 and 23 versus pins 43 and 52 | - | 8 | mA |
| | pins 14 to 17 and 54 versus pins 43 and 52 | - | 12 | mA |
| | pins 3, 5 and 7 versus pin 4 | - | 20 | mA |
| I _{Osink} | output sink current (pins 3, 5 and 7 versus pin 4) | - | -0.8 | mA |
| P _{tot} | total power dissipation | - | 550 | mW |
| T _{stg} | storage temperature | -25 | +125 | °C |
| T _{amb} | operating ambient temperature | 0 | 70 | °C |
| V _{es} | electrostatic handling; note 1 | -300 | +300 | V |

Note

- Charge device model class B: equivalent to discharging a 200 pF capacitor through a 0 Ω series resistor.

THERMAL CHARACTERISTICS

| SYMBOL | PARAMETER | VALUE | UNIT |
|---------------------|---------------------------------------------------------|-------|------|
| R _{th j-a} | thermal resistance from junction to ambient in free air | 65 | K/W |

Economical video processing IC (ECOBENDIC)

SAA4970T

CHARACTERISTICS

$T_{amb} = 0$ to 70 °C; $V_{DD} = 4.5$ to 5.5 V; $V_{CC} = 4.75$ to 5.25 V; unless otherwise specified.

| SYMBOL | PARAMETER | CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|----------------------------------------------|------------------------------------|---------------------|------|-----------|----------------|------|
| Supply | | | | | | |
| V_{DD} | digital supply voltage | | 4.5 | – | 5.5 | V |
| V_{CC} | analog supply voltage | | 4.75 | – | 5.25 | V |
| I_{DD} | digital supply current | | – | – | 75 | mA |
| I_{CC} | analog supply current | note 1 | – | – | 40 | mA |
| Digital inputs | | | | | | |
| V_{IL} | LOW level input voltage | | –0.5 | – | +0.8 | V |
| V_{IH} | HIGH level input voltage | | 2.0 | – | $V_{DD} + 0.5$ | V |
| I_{LI} | input leakage current | | – | – | 10 | μA |
| C_{IC} | input capacitance (clocks) | | – | – | 10 | pF |
| C_{ID} | input capacitance (data) | | – | – | 10 | pF |
| C_{IZ} | input capacitance (I/O in high Z) | | – | – | 10 | pF |
| Reference and current inputs | | | | | | |
| I_I | input current | | – | – | 0.45 | mA |
| Digital outputs | | | | | | |
| V_{OL} | LOW level output voltage | note 2 | 0 | – | 0.6 | V |
| V_{OH} | HIGH level output voltage | note 2 | 2.4 | – | V_{DD} | V |
| Timing | | | | | | |
| T_{cy} | CLK cycle time | | 27 | – | – | ns |
| k_{CLK} | CLK duty cycle T_{cyHIGH}/T_{cy} | | 40 | – | 60 | % |
| t_r | CLK rise time | | – | – | 5 | ns |
| t_f | CLK fall time | | – | – | 6 | ns |
| t_{su} | input data setup time | | – | – | 5 | ns |
| t_h | input data hold time | | – | – | 6 | ns |
| t_{DOH} | output data hold time | note 2 | 3 | – | – | ns |
| t_{DOD} | output data delay time | note 2 | – | – | 25 | ns |
| Data output loads (3-state outputs) | | | | | | |
| C_L | output load capacitance | | 10 | – | 35 | pF |
| Characteristics of the D/A converters | | | | | | |
| RSL_Y | resolution of the Y DAC | | – | 9 | – | bit |
| RSL_C | resolution of the U and V DAC | | – | 8 | – | bit |
| B | analog signal bandwidth (–3 dB) | | 20 | – | – | MHz |
| α_{ct} | crosstalk between channels | | – | – | –42 | dB |
| DLE | differential linearity error | referred to 8 MSB's | – | – | ±0.5 | LSB |
| ILE | integral linearity error | referred to 8 MSB's | – | – | ±1 | LSB |
| V_O | output voltage (without load) | note 3 | – | 2 V (p-p) | – | V |

Economical video processing IC (ECOBENDIC)

SAA4970T

Notes to the characteristics

1. $f_{CLK} = 32 \text{ MHz}$, $f_{data} = 16 \text{ MHz}$ (rectangular full scale); without output load.
2. Timings and levels have to be measured with load circuits $1.2 \text{ k}\Omega$ connected to 3.0 V (TTL load) and $C_L = 25 \text{ pF}$.
3. A series resistor of 25Ω is integrated at the outputs of the buffers. With 50Ω in series, close to the output pins, the nominal output voltage for 75Ω line termination is 1 V (p-p).

Input/output timing

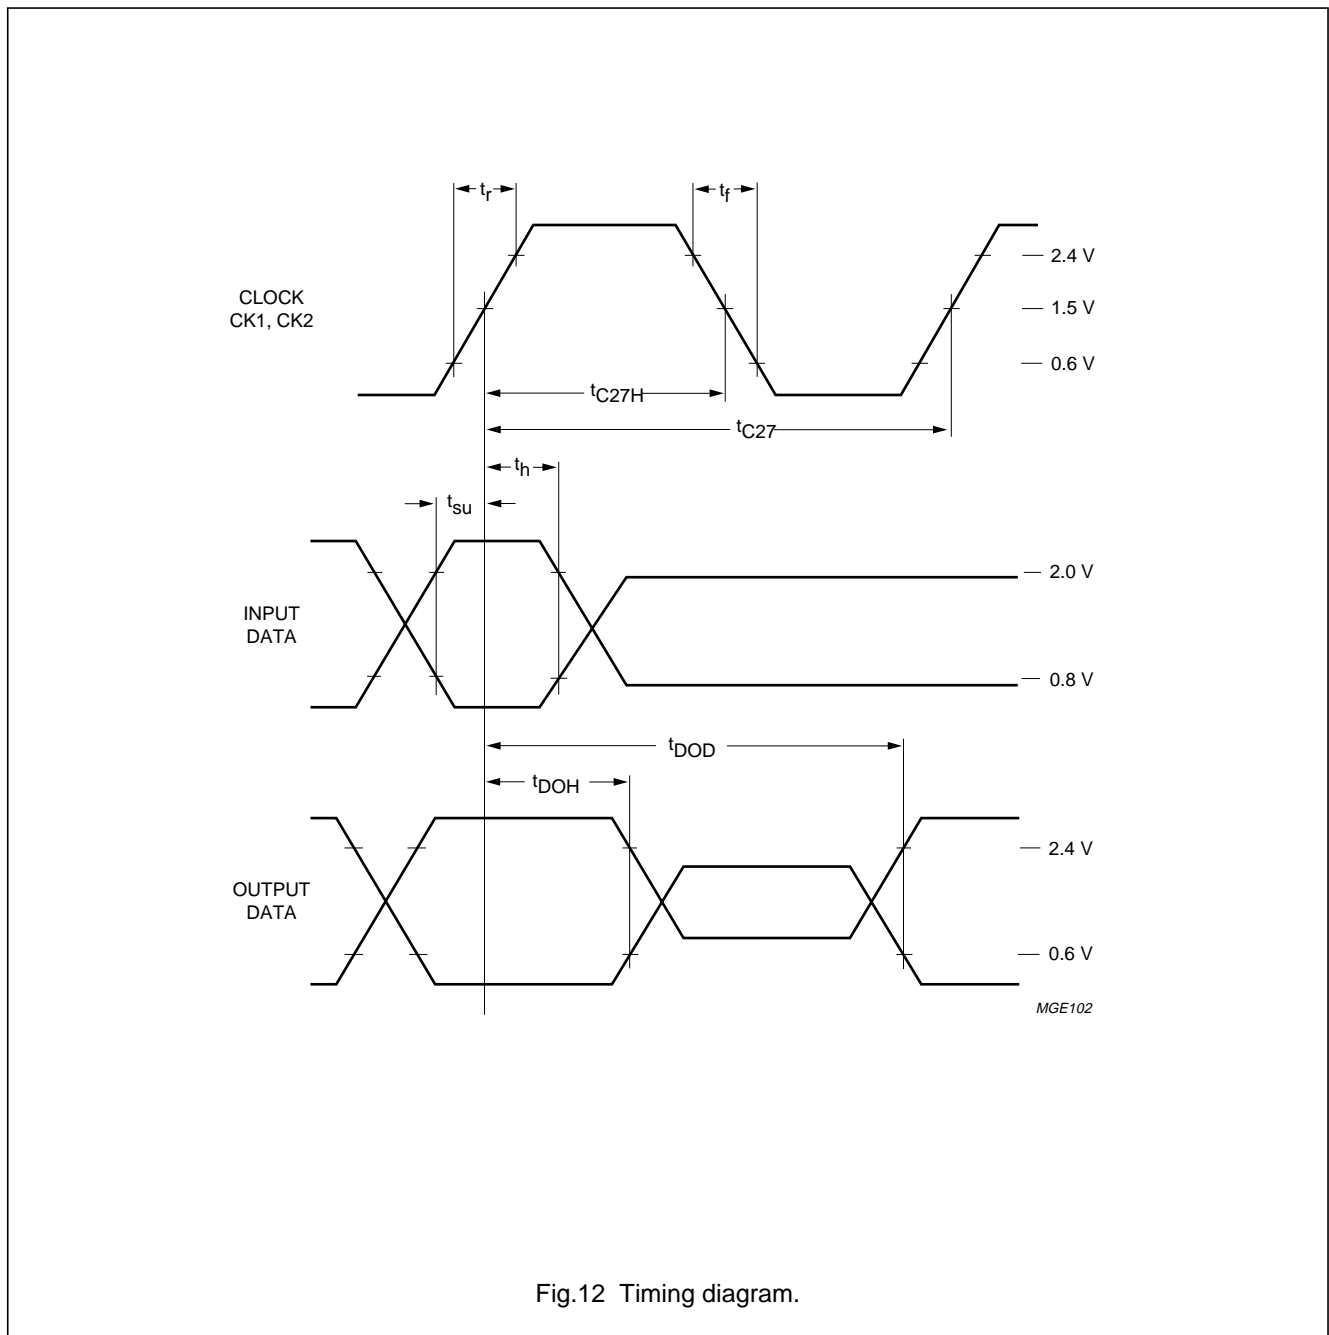


Fig.12 Timing diagram.

Economical video processing IC (ECOBENDIC)

SAA4970T

APPLICATION INFORMATION

The ECOBENDIC fits in a concept together with a triple AD, a field memory and a microcontroller, to form a double scan converter for YUV data.

The scan mode is AABB only. Proscan and noise reduction are not intended with the ECOBENDIC stand-alone. With extra processing of e.g. a Progressive scan-Zoom and Noise reduction IC (PROZONIC SAA4990) or Movement Estimation Line-flicker Zoom Noise reduction IC (MELZONIC SAA4991), other scan modes and noise reduction become possible.

All clock signals in this concept are produced by the ECOBENDIC. The video processing is done with a one-clock system. The read clock is frequency divided by 2 to obtain the write clock. With the aid of a window in which the PLL frequency is held, a phase disturbance of a VCR will not affect the display clock stability within the display of the active part of the video. For compression purposes, like 4 : 3 video on a 16 : 9 display, an external second PLL should be used. On both the acquisition and display side, external PLLs can be applied, with 3-state switching of the CLK signals from the ECOBENDIC.

If the field memory data can be selectively updated, then multi picture is possible, with or without a PIP signal blanked in the YUV input data. In the latter case the ECOBENDIC will present a lower clock frequency to the ADC and memory write clock. With a PIP signal blanked in YUV, the ECOBENDIC will just manoeuvre the PIP position into the right memory location.

The microcontroller gets the (12 MHz) clock and the watchdog reset signals from the ECOBENDIC.

Economical video processing IC (ECOBENDIC)

SAA4970T

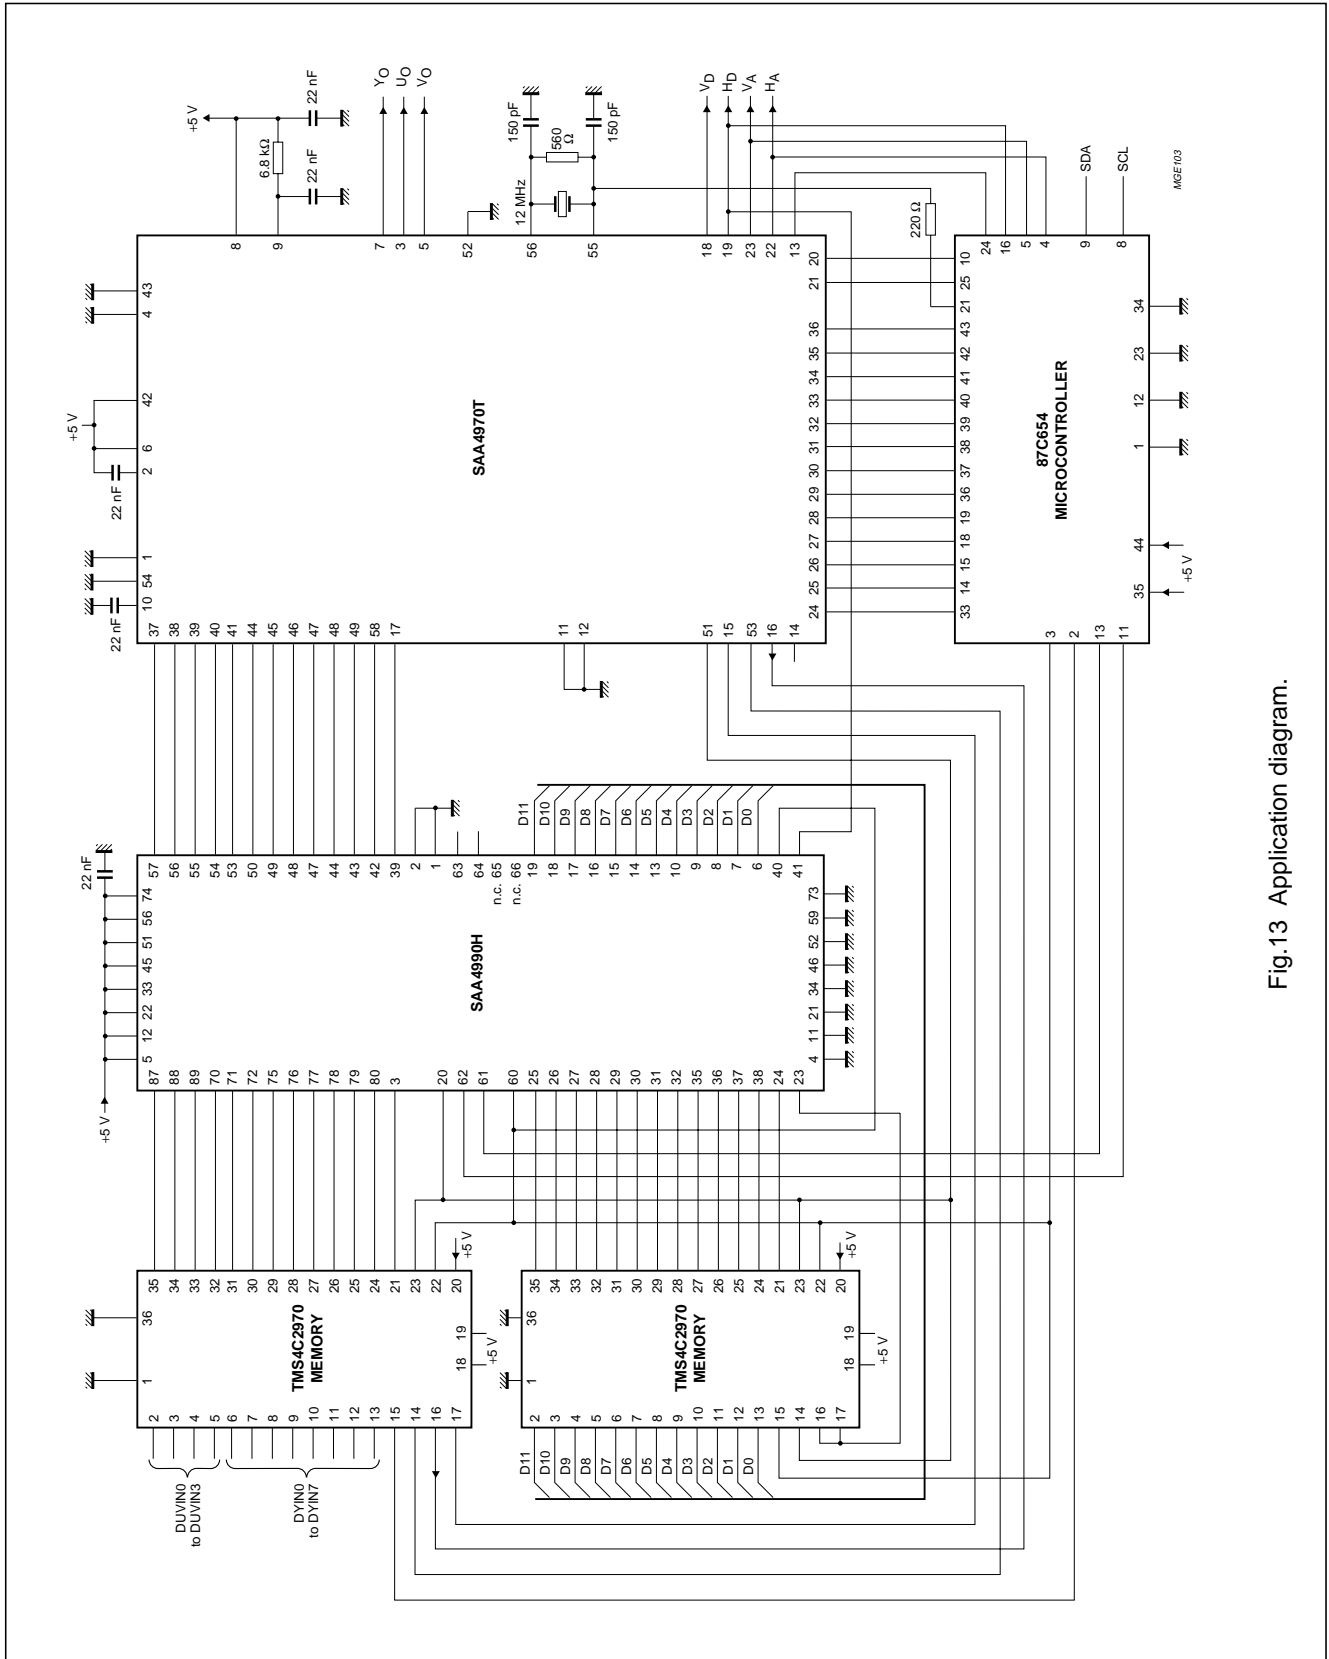


Fig.13 Application diagram.


Economical video processing IC (ECOBENDIC)

SAA4970T

PACKAGE OUTLINE

VSO56: plastic very small outline package; 56 leads

SOT190-1

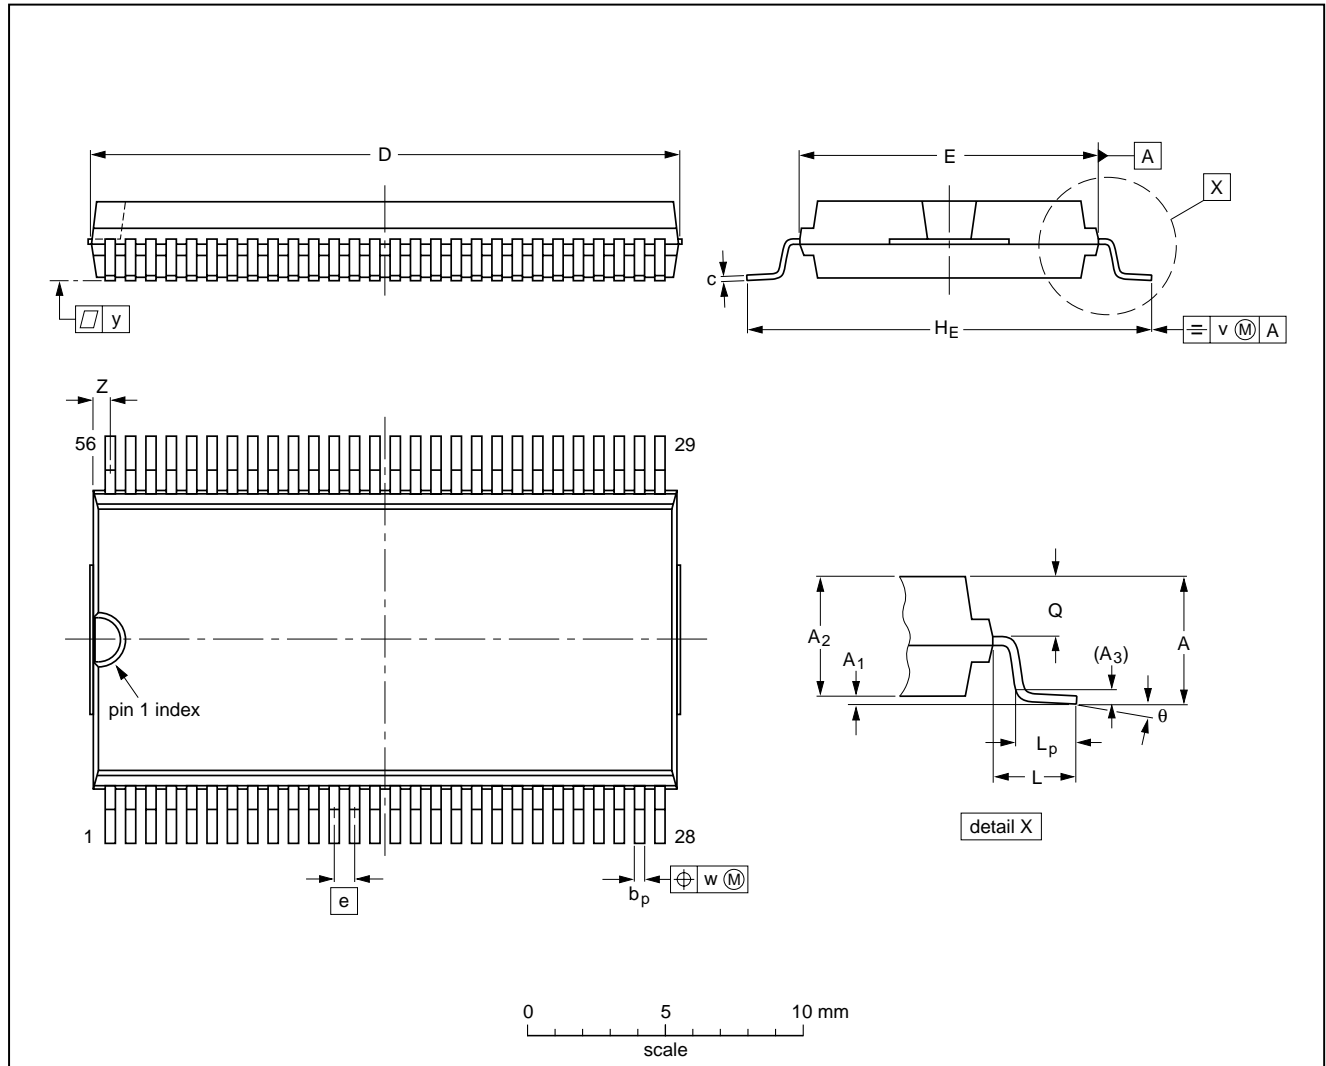

DIMENSIONS (inch dimensions are derived from the original mm dimensions)

| UNIT | A max. | A ₁ | A ₂ | A ₃ | b _p | c | D ⁽¹⁾ | E ⁽²⁾ | e | H _E | L | L _p | Q | v | w | y | z ⁽¹⁾ | θ |
|--------|--------|----------------|----------------|----------------|----------------|------------------|------------------|------------------|------|----------------|-------|----------------|----------------|-------|-------|-------|------------------|----------|
| mm | 3.3 | 0.3 0.1 | 3.0 2.8 | 0.25 | 0.42 0.30 | 0.22 0.14 | 21.65 21.35 | 11.1 11.0 | 0.75 | 15.8 15.2 | 2.25 | 1.6 1.4 | 1.45 1.30 | 0.2 | 0.1 | 0.1 | 0.90 0.55 | 7° 0° |
| inches | 0.13 | 0.012 0.004 | 0.12 0.11 | 0.01 | 0.017 0.012 | 0.0087 0.0055 | 0.85 0.84 | 0.44 0.43 | 0.03 | 0.62 0.60 | 0.089 | 0.063 0.055 | 0.057 0.051 | 0.008 | 0.004 | 0.004 | 0.035 0.022 | |

Note

1. Plastic or metal protrusions of 0.3 mm maximum per side are not included.
2. Plastic interlead protrusions of 0.25 mm maximum per side are not included.

| OUTLINE VERSION | REFERENCES | | | | EUROPEAN PROJECTION | ISSUE DATE |
|-----------------|------------|-------|------|--|---------------------|----------------------|
| | IEC | JEDEC | EIAJ | | | |
| SOT190-1 | | | | | | 92-11-17 96-04-02 |

Economical video processing IC (ECOBENDIC)

SAA4970T

SOLDERING

Introduction

There is no soldering method that is ideal for all IC packages. Wave soldering is often preferred when through-hole and surface mounted components are mixed on one printed-circuit board. However, wave soldering is not always suitable for surface mounted ICs, or for printed-circuits with high population densities. In these situations reflow soldering is often used.

This text gives a very brief insight to a complex technology. A more in-depth account of soldering ICs can be found in our "IC Package Databook" (order code 9398 652 90011).

Reflow soldering

Reflow soldering techniques are suitable for all VSO packages.

Reflow soldering requires solder paste (a suspension of fine solder particles, flux and binding agent) to be applied to the printed-circuit board by screen printing, stencilling or pressure-syringe dispensing before package placement.

Several techniques exist for reflowing; for example, thermal conduction by heated belt. Dwell times vary between 50 and 300 seconds depending on heating method. Typical reflow temperatures range from 215 to 250 °C.

Preheating is necessary to dry the paste and evaporate the binding agent. Preheating duration: 45 minutes at 45 °C.

Wave soldering

Wave soldering techniques can be used for all VSO packages if the following conditions are observed:

- A double-wave (a turbulent wave with high upward pressure followed by a smooth laminar wave) soldering technique should be used.
- The longitudinal axis of the package footprint must be parallel to the solder flow.
- The package footprint must incorporate solder thieves at the downstream end.

During placement and before soldering, the package must be fixed with a droplet of adhesive. The adhesive can be applied by screen printing, pin transfer or syringe dispensing. The package can be soldered after the adhesive is cured.

Maximum permissible solder temperature is 260 °C, and maximum duration of package immersion in solder is 10 seconds, if cooled to less than 150 °C within 6 seconds. Typical dwell time is 4 seconds at 250 °C.

A mildly-activated flux will eliminate the need for removal of corrosive residues in most applications.

Repairing soldered joints

Fix the component by first soldering two diagonally-opposite end leads. Use only a low voltage soldering iron (less than 24 V) applied to the flat part of the lead. Contact time must be limited to 10 seconds at up to 300 °C. When using a dedicated tool, all other leads can be soldered in one operation within 2 to 5 seconds between 270 and 320 °C.

DEFINITIONS

| Data sheet status | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Objective specification | This data sheet contains target or goal specifications for product development. |
| Preliminary specification | This data sheet contains preliminary data; supplementary data may be published later. |
| Product specification | This data sheet contains final product specifications. |
| Limiting values | |
| Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability. | |
| Application information | |
| Where application information is given, it is advisory and does not form part of the specification. | |

**Economical video processing IC
(ECOBENDIC)**

SAA4970T**LIFE SUPPORT APPLICATIONS**

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.

Economical video processing IC
(ECOBENDIC)

SAA4970T

NOTES

Economical video processing IC
(ECOBENDIC)

SAA4970T

NOTES

Philips Semiconductors – a worldwide company

Argentina: see South America

Australia: 34 Waterloo Road, NORTH RYDE, NSW 2113,
Tel. +61 2 9805 4455, Fax. +61 2 9805 4466

Austria: Computerstr. 6, A-1101 WIEN, P.O. Box 213,
Tel. +43 1 60 101, Fax. +43 1 60 101 1210

Belarus: Hotel Minsk Business Center, Bld. 3, r. 1211, Volodarski Str. 6,
220050 MINSK, Tel. +375 172 200 733, Fax. +375 172 200 773

Belgium: see The Netherlands

Brazil: see South America

Bulgaria: Philips Bulgaria Ltd., Energoproject, 15th floor,
51 James Bourchier Blvd., 1407 SOFIA,
Tel. +359 2 689 211, Fax. +359 2 689 102

Canada: PHILIPS SEMICONDUCTORS/COMPONENTS,
Tel. +1 800 234 7381

China/Hong Kong: 501 Hong Kong Industrial Technology Centre,
72 Tat Chee Avenue, Kowloon Tong, HONG KONG,
Tel. +852 2319 7888, Fax. +852 2319 7700

Colombia: see South America

Czech Republic: see Austria

Denmark: Prags Boulevard 80, PB 1919, DK-2300 COPENHAGEN S,
Tel. +45 32 88 2636, Fax. +45 31 57 1949

Finland: Sinikalliontie 3, FIN-02630 ESPOO,
Tel. +358 9 615800, Fax. +358 9 61580/xxx

France: 4 Rue du Port-aux-Vins, BP317, 92156 SURESNES Cedex,
Tel. +33 1 40 99 6161, Fax. +33 1 40 99 6427

Germany: Hammerbrookstraße 69, D-20097 HAMBURG,
Tel. +49 40 23 53 60, Fax. +49 40 23 536 300

Greece: No. 15, 25th March Street, GR 17778 TAVROS/ATHENS,
Tel. +30 1 4894 339/239, Fax. +30 1 4814 240

Hungary: see Austria

India: Philips INDIA Ltd, Shivsagar Estate, A Block, Dr. Annie Besant Rd.
Worli, MUMBAI 400 018, Tel. +91 22 4938 541, Fax. +91 22 4938 722

Indonesia: see Singapore

Ireland: Newstead, Clonskeagh, DUBLIN 14,
Tel. +353 1 7640 000, Fax. +353 1 7640 200

Israel: RAPAC Electronics, 7 Kehilat Saloniki St, TEL AVIV 61180,
Tel. +972 3 645 0444, Fax. +972 3 649 1007

Italy: PHILIPS SEMICONDUCTORS, Piazza IV Novembre 3,
20124 MILANO, Tel. +39 2 6752 2531, Fax. +39 2 6752 2557

Japan: Philips Bldg 13-37, Kohnan 2-chome, Minato-ku, TOKYO 108,
Tel. +81 3 3740 5130, Fax. +81 3 3740 5077

Korea: Philips House, 260-199 Itaewon-dong, Yongsan-ku, SEOUL,
Tel. +82 2 709 1412, Fax. +82 2 709 1415

Malaysia: No. 76 Jalan Universiti, 46200 PETALING JAYA, SELANGOR,
Tel. +60 3 750 5214, Fax. +60 3 757 4880

Mexico: 5900 Gateway East, Suite 200, EL PASO, TEXAS 79905,
Tel. +9-5 800 234 7381

Middle East: see Italy

Netherlands: Postbus 90050, 5600 PB EINDHOVEN, Bldg. VB,
Tel. +31 40 27 82785, Fax. +31 40 27 88399

New Zealand: 2 Wagener Place, C.P.O. Box 1041, AUCKLAND,
Tel. +64 9 849 4160, Fax. +64 9 849 7811

Norway: Box 1, Manglerud 0612, OSLO,
Tel. +47 22 74 8000, Fax. +47 22 74 8341

Philippines: Philips Semiconductors Philippines Inc.,
106 Valero St. Salcedo Village, P.O. Box 2108 MCC, MAKATI,
Metro MANILA, Tel. +63 2 816 6380, Fax. +63 2 817 3474

Poland: Ul. Lukiska 10, PL 04-123 WARSZAWA,
Tel. +48 22 612 2831, Fax. +48 22 612 2327

Portugal: see Spain

Romania: see Italy

Russia: Philips Russia, Ul. Usatcheva 35A, 119048 MOSCOW,
Tel. +7 095 247 9145, Fax. +7 095 247 9144

Singapore: Lorong 1, Toa Payoh, SINGAPORE 1231,
Tel. +65 350 2538, Fax. +65 251 6500

Slovakia: see Austria

Slovenia: see Italy

South Africa: S.A. PHILIPS Pty Ltd., 195-215 Main Road Martindale,
2092 JOHANNESBURG, P.O. Box 7430 Johannesburg 2000,
Tel. +27 11 470 5911, Fax. +27 11 470 5494

South America: Rua do Rocio 220, 5th floor, Suite 51,
04552-903 São Paulo, SÃO PAULO - SP, Brazil,
Tel. +55 11 821 2333, Fax. +55 11 829 1849

Spain: Balmes 22, 08007 BARCELONA,
Tel. +34 3 301 6312, Fax. +34 3 301 4107

Sweden: Kottbygatan 7, Akalla, S-16485 STOCKHOLM,
Tel. +46 8 632 2000, Fax. +46 8 632 2745

Switzerland: Allmendstrasse 140, CH-8027 ZÜRICH,
Tel. +41 1 488 2686, Fax. +41 1 481 7730

Taiwan: PHILIPS TAIWAN Ltd., 23-30F, 66,
Chung Hsiao West Road, Sec. 1, P.O. Box 22978,
TAIPEI 100, Tel. +886 2 382 4443, Fax. +886 2 382 4444

Thailand: PHILIPS ELECTRONICS (THAILAND) Ltd.,
209/2 Sanpavuth-Bangna Road Prakanong, BANGKOK 10260,
Tel. +66 2 745 4090, Fax. +66 2 398 0793

Turkey: Talatpasa Cad. No. 5, 80640 GÜLTEPE/ISTANBUL,
Tel. +90 212 279 2770, Fax. +90 212 282 6707

Ukraine: PHILIPS UKRAINE, 4 Patrice Lumumba str., Building B, Floor 7,
252042 KIEV, Tel. +380 44 264 2776, Fax. +380 44 268 0461

United Kingdom: Philips Semiconductors Ltd., 276 Bath Road, Hayes,
MIDDLESEX UB3 5BX, Tel. +44 181 730 5000, Fax. +44 181 754 8421

United States: 811 East Arques Avenue, SUNNYVALE, CA 94088-3409,
Tel. +1 800 234 7381

Uruguay: see South America

Vietnam: see Singapore

Yugoslavia: PHILIPS, Trg N. Pasica 5/v, 11000 BEOGRAD,
Tel. +381 11 625 344, Fax. +381 11 635 777

For all other countries apply to: Philips Semiconductors, Marketing & Sales Communications,
Building BE-p, P.O. Box 218, 5600 MD EINDHOVEN, The Netherlands, Fax. +31 40 27 24825

Internet: <http://www.semiconductors.philips.com>

© Philips Electronics N.V. 1996

SCA52

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Printed in The Netherlands

537021/10/01/pp32

Date of release: 1996 Oct 25

Document order number: 9397 750 01436

Let's make things better.

Philips
Semiconductors



PHILIPS