

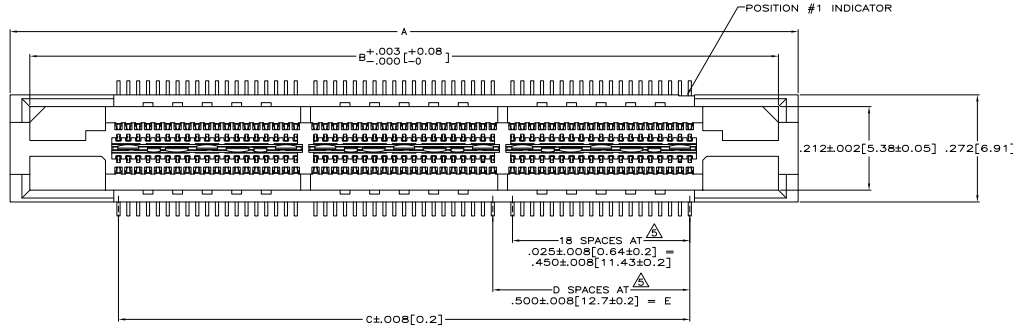
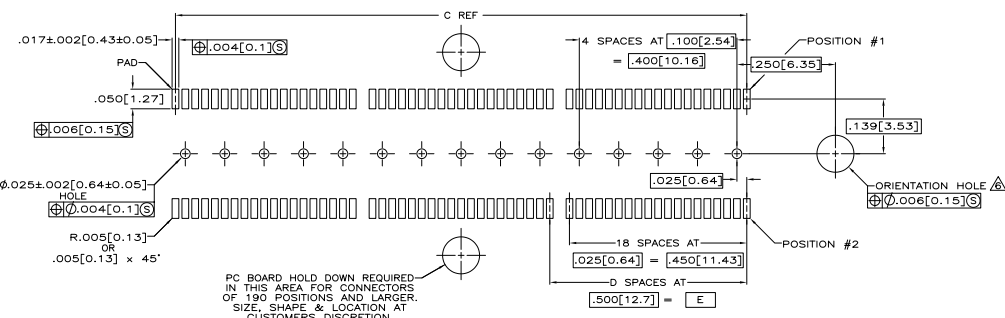


THIS DRAWING IS UNAPPROVED FOR PUBLICATION
 © 1988 TYPHO ELECTRONICS CORPORATION ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	CHK	APP
AD 47					
B		REVISED PER ECO-08-009495			



- △ HOUSING: LIQUID CRYSTAL POLYMER, COLOR BLACK.
CONTACTS: HIGH RELIABILITY COPPER ALLOY.
GROUND BUSES: PHOSPHOR BRONZE ALLOY, UNS C51100.
- △ CONTACTS & GROUND BUSES: NICKEL UNDERPLATE ALL OVER, MATING SURFACE PLATED TO MEET LEVEL 1 PERFORMANCE REQUIREMENTS OF THE PRODUCT SPECIFICATION 108-1422, SOLDER TAILS PLATED MATTE TIN.
- △ DATE CODE MARKED IN AREA INDICATED ON SIDE OPPOSITE POSITION #1.
- △ ONE GROUND BUS WITH 5 TAILS PER EACH MODULE.
- △ TOLERANCE NON-ACCUMULATIVE.
- △ FOR STANDARD APPLICATIONS, ORIENTATION HOLE TO BE $\phi .094 \pm .002 [2.39 \pm 0.05]$.
FOR SLIP-FIT APPLICATIONS, ORIENTATION HOLE TO BE $\phi .079 \pm .001 [2.00 \pm 0.03]$.
- △ OBSOLETE

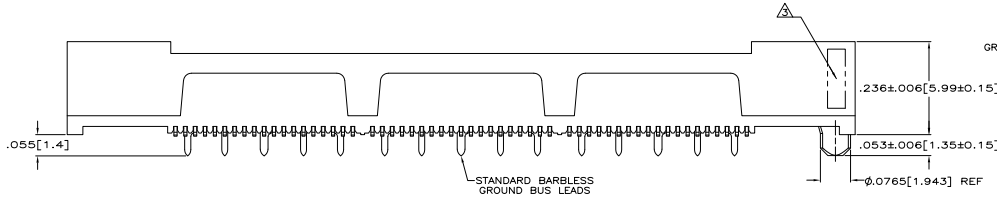

PC BOARD HOLD DOWN REQUIRED IN THIS AREA FOR CONNECTORS OF 190 POSITIONS AND LARGER. SIZE, SHAPE & LOCATION AT CUSTOMERS DISCRETION.

RECOMMENDED PC BOARD LAYOUT (VIEWED FROM CONNECTOR SIDE)

QTY	DESCRIPTION	UNIT	QTY	DESCRIPTION	UNIT	QTY	DESCRIPTION	UNIT	QTY	DESCRIPTION	UNIT	
2,724	120	3,000	76.2	6	3,450	87.63	3,900	99.06	4,000	101.6	266	576710-7
4,024	104	2,500	63.5	5	2,950	74.93	3,500	86.36	3,500	85.9	228	576710-6
3,485	88	2,000	50.8	4	2,450	62.23	2,900	73.66	3,000	76.2	180	576710-5
3,485	88	1,500	38.1	3	1,950	49.53	2,400	60.96	2,500	63.5	152	576710-4
2,855	72	1,000	25.4	2	1,450	36.83	1,900	48.26	2,000	50.8	114	576710-3
2,205	56	500	12.7	1	950	24.13	1,400	35.56	1,500	38.1	76	576710-2
1,732	44	500	12.7	0	450	11.43	900	22.86	1,000	25.4	58	576710-1

THIS DRAWING IS A CONTROLLED DOCUMENT.	DATE	REV	DESCRIPTION	BY	CHK	APP
	27 OCT 84					
	27 OCT 84					
	27 OCT 84					

DESCRIPTION	REVISIONS	DATE	BY	CHK	APP
RECEPTACLE ASSEMBLY, VERTICAL, GULL WING LEADS, MOTOR	108-1422				
114-11004					

DATE	REV	DESCRIPTION	BY	CHK	APP
100779	G-5	767110			