
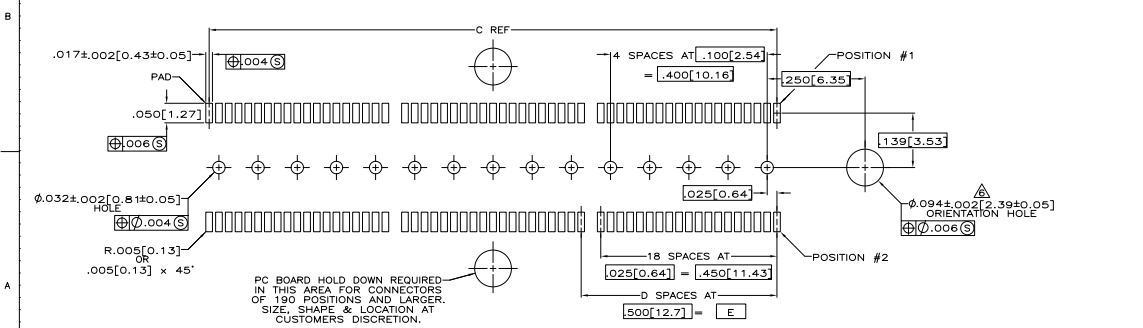


- △ HOUSING: LIQUID CRYSTAL POLYMER, COLOR BLACK.
- △ CONTACTS & GROUND BUSES: NICKEL UNDERPLATE ALL OVER, MATING SURFACE PLATED TO MEET LEVEL 2 PERFORMANCE REQUIREMENTS OF THE PRODUCT SPECIFICATION 108-1422, SOLDER TAILS PLATED TIN-LEAD.
- △ DATE CODE MARKED IN AREA INDICATED ON SIDE OPPOSITE POSITION #1.
- △ ONE GROUND BUS WITH 5 TAILS PER EACH MODULE.
- △ TOLERANCE NON-ACCUMULATIVE.
- △ FOR SLIP-FIT APPLICATIONS, ORIENTATION HOLE TO BE  $\phi .079 \pm .001 [2.00 \pm 0.03]$ .

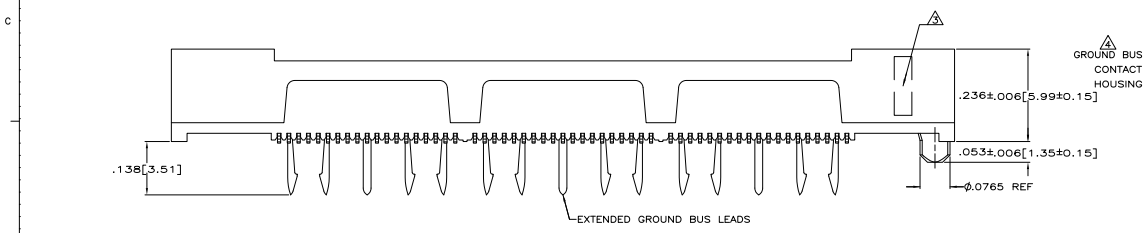

RECOMMENDED PC BOARD LAYOUT  
 (VIEWED FROM CONNECTOR SIDE)

3,000 (76.2)	5	3,450 (87.63)	3,900 (99.06)	4,000 (101.6)	266	767061-7
2,900 (73.5)	5	2,950 (74.93)	3,400 (86.36)	3,500 (88.9)	228	767061-6
2,800 (71.1)	4	2,850 (72.37)	2,900 (73.66)	3,000 (76.2)	190	767061-5
1,500 (38.1)	3	1,950 (49.53)	2,400 (60.96)	2,500 (63.5)	152	767061-4
1,000 (25.4)	2	1,450 (36.83)	1,900 (48.26)	2,300 (58.42)	114	767061-3
500 (12.7)	1	950 (24.13)	1,400 (35.56)	1,500 (38.1)	36	767061-2
200 (5.08)	0	450 (11.43)	900 (22.86)	1,000 (25.4)	38	767061-1
E	D	C	B	A	NO OF POS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DATE: 108-1422  
 APPLICATION: RECEPTACLE ASSEMBLY, VERTICAL  
 SIZE: 114-11004  
 PART: 00779  
 SCALE: 8:1

COMPACT Type Electronics Corporation  
 Headquarters, PA 17105-2008

REVISIONS: AD 47, NT