

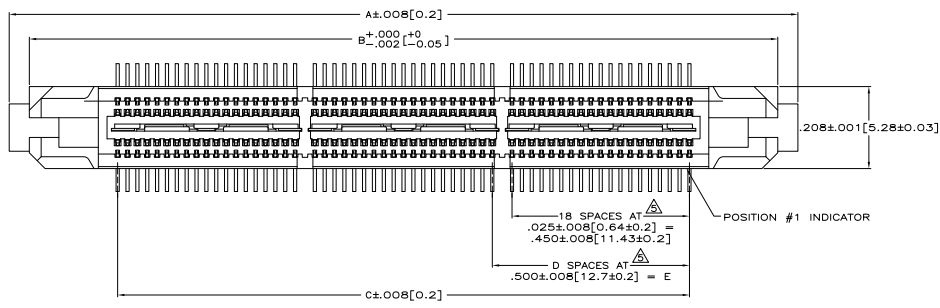
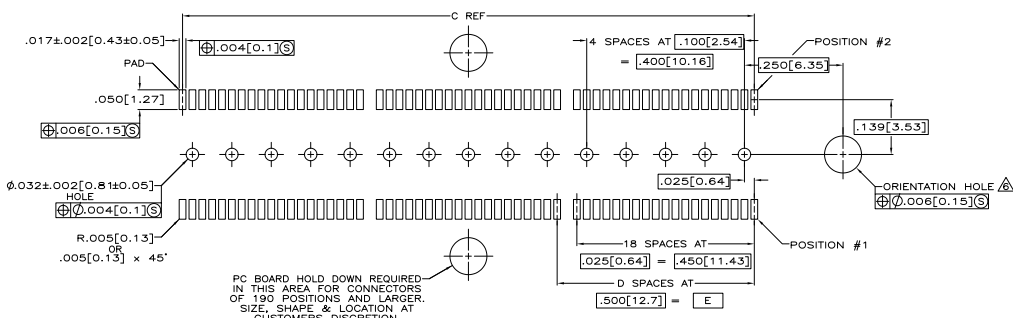


THIS DRAWING IS UNPUBLISHED. REVISIONS FOR YOUR RECORD. ALL RIGHTS RESERVED.

REV	DATE	DESCRIPTION	BY	CHK	APP
AD 47		REVISED PER ECO-08-009495	25AM/08	DH	DD

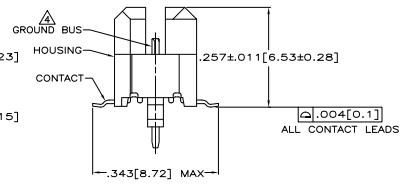

- △ HOUSING: LIQUID CRYSTAL POLYMER, COLOR BLACK.
- CONTACTS: HIGH RELIABILITY COPPER ALLOY.
- GROUND BUSES: PHOSPHOR BRONZE ALLOY, UNS C51100.
- △ CONTACTS & GROUND BUSES: NICKEL UNDERPLATE ALL OVER, MATING SURFACE PLATED TO MEET LEVEL 2 PERFORMANCE REQUIREMENTS OF TE PRODUCT SPECIFICATION 108-1422, SOLDER TAILS PLATED MATTE TIN.
- △ DATE CODE MARKED IN AREA INDICATED ON SIDE OPPOSITE POSITION #1.
- △ ONE GROUND BUS WITH 5 TAILS PER EACH MODULE.
- △ TOLERANCE NON-ACCUMULATIVE.
- △ FOR STANDARD APPLICATIONS, ORIENTATION HOLE TO BE $\phi.094\pm.002[2.39\pm0.05]$.
- △ FOR SLIP-FIT APPLICATIONS, ORIENTATION HOLE TO BE $\phi.079\pm.001[2.00\pm0.03]$.

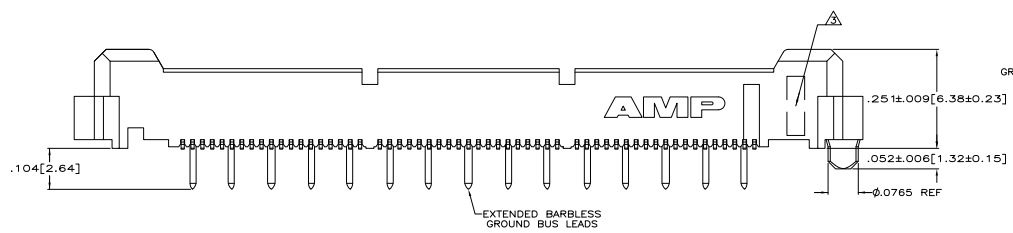

PC BOARD HOLD DOWN REQUIRED IN THIS AREA FOR CONNECTORS OF 190 POSITIONS AND LARGER. SIZE, SHAPE & LOCATION AT CUSTOMERS DISCRETION.

RECOMMENDED PC BOARD LAYOUT (VIEWED FROM CONNECTOR SIDE)

F	E	D	C	B	A	NO. OF POS	PART NUMBER
4.724[120]	3.000[76.2]	6	3.450[87.63]	3.898[99.01]	4.000[101.6]	266	5767117-7
4.054[104]	2.500[63.5]	5	2.850[74.93]	3.398[86.31]	3.500[88.9]	228	5767117-6
3.485[89]	2.000[50.8]	4	2.450[62.23]	2.898[73.61]	3.000[76.2]	190	5767117-5
3.485[89]	1.500[38.1]	3	1.950[49.53]	2.398[60.91]	2.500[63.5]	152	5767117-4
2.850[72]	1.000[25.4]	2	1.450[36.83]	1.898[48.21]	2.000[50.8]	114	5767117-3
2.205[56]	.500[12.7]	1	.950[24.13]	1.398[35.51]	1.500[38.1]	76	5767117-2
1.732[44]	.000[0]	0	.450[11.43]	.898[22.81]	1.000[25.4]	38	5767117-1

THIS DRAWING IS A CONTROLLED DOCUMENT. DATE: 07/07/04

DESIGNED BY: [Signature] DATE: 07/07/04

APPROVED BY: [Signature] DATE: 07/07/04

DATE: 108-1422

REV: 114-11004

SIZE: 114-11004

DATE: 07/07/04

CUSTOMER DRAWING: [Signature]

PLUG ASSEMBLY, 266[6.6] VERTICAL, .025[0.64]JL, GULL WING LEADS, MICTOR

REVISED TO: [Signature]