

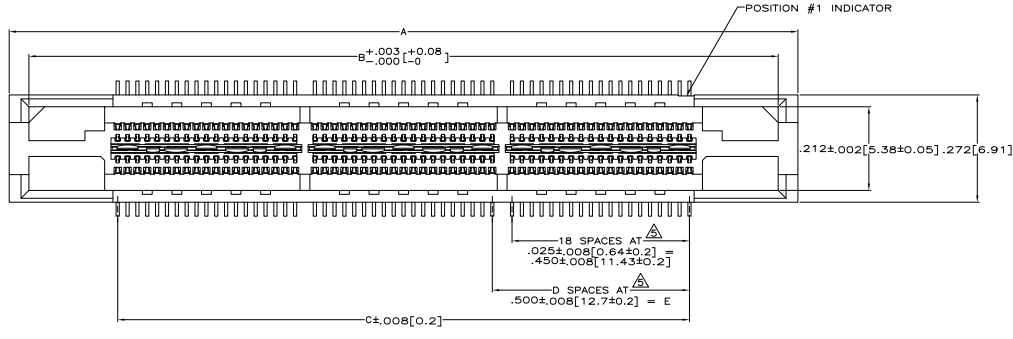


THIS DRAWING IS UNPUBLISHED  
 REVISIONS FOR YOUR INFORMATION  
 © COPYRIGHT 1988 BY TYS ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

REV	DATE	DESCRIPTION	BY	CHK	APP
AD 47					
E		REVISED PER ECO-08-02945	24MPROB	DH	DD
E1		REVISED PER ECO-08-01241	130CT09	AEG	DD

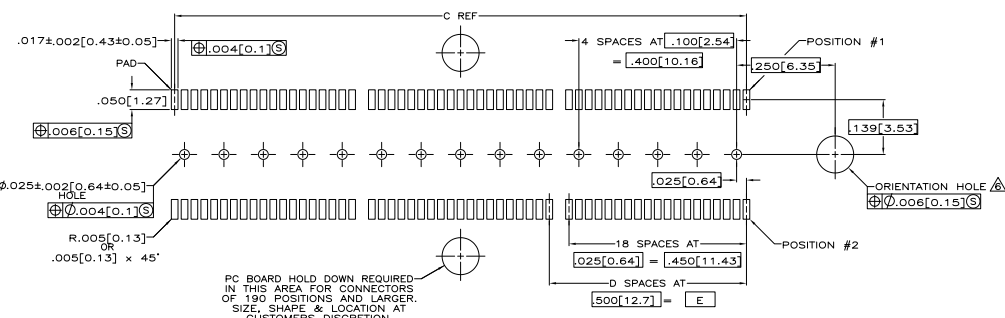

- △ HOUSING: LIQUID CRYSTAL POLYMER, COLOR BLACK.
- △ CONTACTS & GROUND BUSES: NICKEL UNDERPLATE ALL OVER, MATING SURFACE PLATED TO MEET LEVEL 1 PERFORMANCE REQUIREMENTS OF TE PRODUCT SPECIFICATION 108-1422, SOLDER TAILS PLATED TIN-LEAD.
- △ DATE CODE MARKED IN AREA INDICATED ON SIDE OPPOSITE POSITION #1.
- △ ONE GROUND BUS WITH 5 TAILS PER EACH MODULE.
- △ TOLERANCE NON-ACCUMULATIVE.
- △ FOR STANDARD APPLICATIONS, ORIENTATION HOLE TO BE  $\phi .094 \pm .002$  [2.39±0.05].
- △ FOR SLIP-FIT APPLICATIONS, ORIENTATION HOLE TO BE  $\phi .079 \pm .001$  [2.00±0.03].

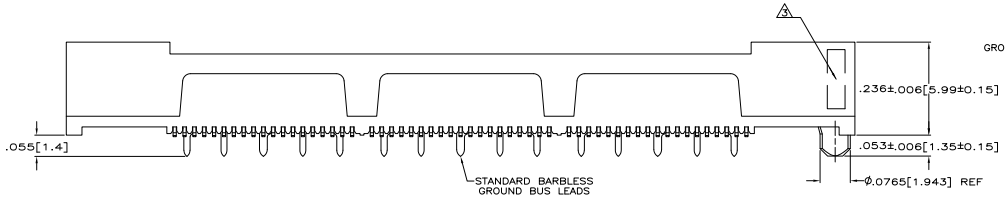

RECOMMENDED PC BOARD LAYOUT  
 (VIEWED FROM CONNECTOR SIDE)

4	3	2	1	0	NO. OF POS	PART NUMBER
4.724 [120]	3.000 [76.2]	6	3.450 [87.63]	3.900 [99.06]	4.000 [101.6]	266 767110-7
4.084 [104]	2.500 [63.5]	5	2.850 [72.93]	3.400 [86.36]	3.500 [89.9]	228 767110-6
3.465 [88]	2.000 [50.8]	4	2.450 [62.23]	2.900 [73.66]	3.000 [76.2]	190 767110-5
3.465 [88]	1.500 [38.1]	3	1.950 [49.53]	2.400 [60.96]	2.500 [63.5]	152 767110-4
2.850 [72]	1.000 [25.4]	2	1.450 [36.93]	1.900 [48.26]	2.000 [50.8]	114 767110-3
2.205 [56]	.500 [12.7]	1	.950 [24.13]	1.400 [35.56]	1.500 [38.1]	76 767110-2
1.732 [44]	.000 [0]	0	.450 [11.43]	.900 [22.86]	1.000 [25.4]	38 767110-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DESIGN	ISSUED	DATE	BY	CHK	APP
DRAWING NO. 114-11004		REVISIONS	DATE	BY	CHK	APP	
CUSTOMER DRAWING		DATE	BY	CHK	APP		