

MGFS45V2735

2.7 - 3.5GHz BAND 30W INTERNALLY MATCHED GaAs FET

DESCRIPTION

The MGFS45V2735 is an internally impedance-matched GaAs power FET especially designed for use in 2.7 - 3.5 GHz band amplifiers. The hermetically sealed metal-ceramic package guarantees high reliability.

FEATURES

- Class A operation
- Internally matched to 50(ohm) system
- High output power
 - P1dB = 30W (TYP.) @ f=2.7 - 3.5 GHz
- High power gain
 - GLP = 12 dB (TYP.) @ f=2.7 - 3.5GHz
- High power added efficiency
 - P.A.E. = 36 % (TYP.) @ f=2.7 - 3.5GHz
- Low distortion [item -51]
 - IM3=-45dBc(TYP.) @Po=34.5dBm S.C.L.

APPLICATION

- item 01 : 2.7 - 3.5 GHz band power amplifier
- item 51 : 2.7 - 3.5 GHz band digital ratio communication

QUALITY GRADE

IG

RECOMMENDED BIAS CONDITIONS

- VDS = 10 (V)
- ID = 8 (A)
- RG=25 (ohm)

ABSOLUTE MAXIMUM RATINGS

(Ta=25deg.C)

Symbol	Parameter	Ratings	Unit
VGDO	Gate to drain voltage	-15	V
VGSO	Gate to source voltage	-15	V
ID	Drain current	20	A
IGR	Reverse gate current	-80	mA
IGF	Forward gate current	168	mA
PT *1	Total power dissipation	150	W
Tch	Channel temperature	175	deg.C
Tstg	Storage temperature	-65 / +175	deg.C

*1 : Tc=25deg.C


ELECTRICAL CHARACTERISTICS

(Ta=25deg.C)

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
IDSS	Saturated drain current	VDS = 3V , VGS = 0V	-	24	-	A
gm	Transconductance	VDS = 3V , ID = 8A	-	8	-	S
VGS(off)	Saturated drain current	VDS = 3V , ID = 160mA	-2	-	-5	V
P1dB	Output power at 1dB gain compression	VDS=10V, ID(RF off)=8A, f=2.7 - 3.5GHz	44	45	-	dBm
GLP	Linear power gain		11	12	-	dB
ID	Drain current		-	8	-	A
P.A.E.	Power added efficiency		-	36	-	%
IM3 *2	3rd order IM distortion		-42	-45	-	dBc
Rth(ch-c) *3	Thermal resistance		delta Vf method	-	0.8	1

*2 : item -51,2 tone test,Po=34.5dBm Single Carrier Level,f=2.7,3.1,3.5GHz,delta f=10MHz

*3 : Channel-case

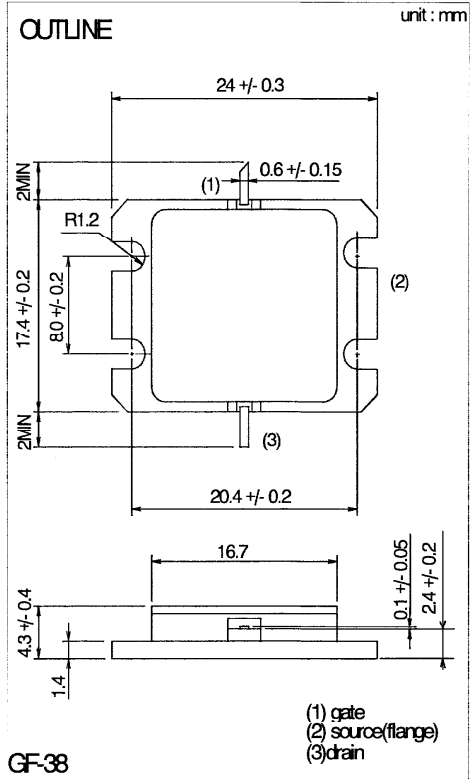

GF-38

< Keep safety first in your circuit designs! >
 Mitsubishi Electric Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (1)placement of substitutive, auxiliary circuits, (2)use of non-flammable material or (3)prevention against any malfunction or mishap.






MITSUBISHI ELECTRIC

Aug. 1999

MGFS45V2735

2.7 - 3.5GHz BAND 30W INTERNALLY MATCHED GaAs FET

TYPICAL CHARACTERISTICS

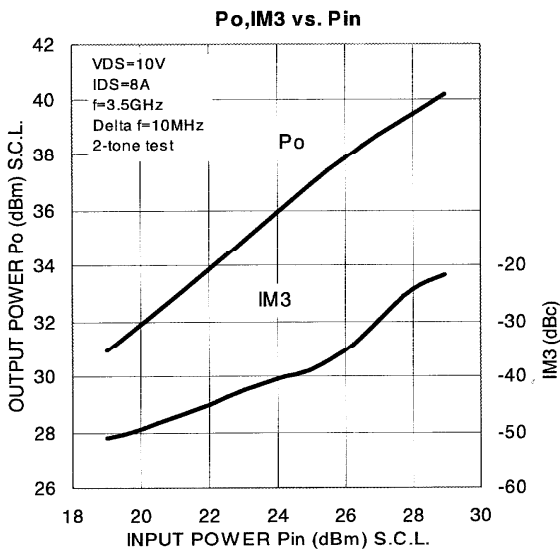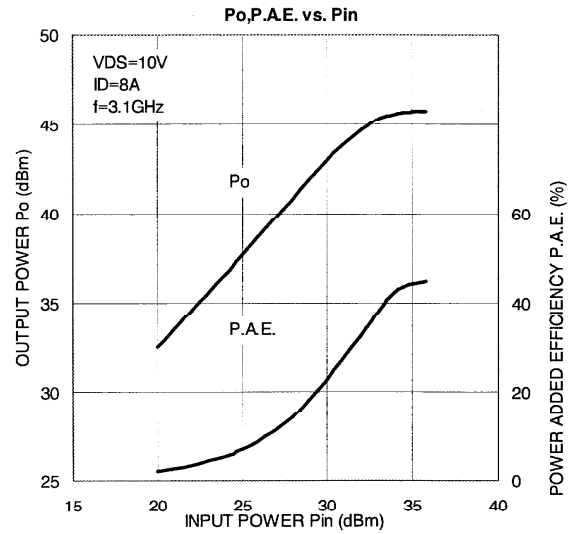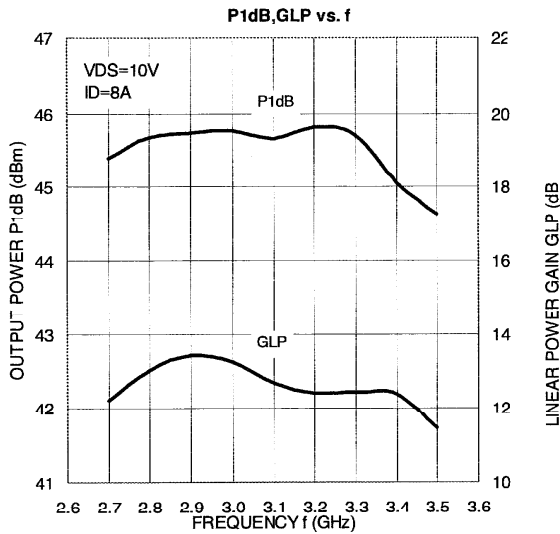

S parameters (Ta=25deg.C, VDS=10(V), IDS=8(A))

f (GHz)	S-Parameter (TYP.)							
	S11		S21		S12		S22	
	Magn.	Angle(deg)	Magn.	Angle(deg)	Magn.	Angle(deg)	Magn.	Angle(deg)
2.60	0.63	88	3.39	38	0.03	-17	0.59	26
2.70	0.58	47	3.90	3	0.04	-52	0.49	-1
2.80	0.51	1	4.30	-31	0.05	-86	0.41	-30
2.90	0.47	-51	4.52	-66	0.06	-122	0.32	-67
3.00	0.47	-105	4.51	-101	0.06	-157	0.27	-106
3.10	0.50	-152	4.33	-135	0.06	166	0.24	-137
3.20	0.51	166	4.15	-168	0.05	134	0.23	-165
3.30	0.49	123	4.04	159	0.06	100	0.21	174
3.40	0.45	61	3.92	117	0.06	49	0.15	149
3.50	0.48	-11	3.60	76	0.06	8	0.05	165
3.60	0.64	-75	2.86	33	0.05	-40	0.16	-115



MITSUBISHI
ELECTRIC

Aug. 1999