
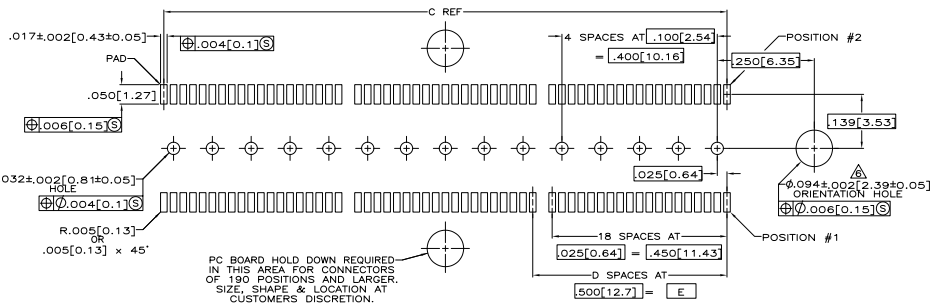


- △ HOUSING: LIQUID CRYSTAL POLYMER, COLOR BLACK.
CONTACTS: HIGH RELIABILITY COPPER ALLOY.
GROUND BUSES: PHOSPHOR BRONZE ALLOY, UNS C51100.
- △ CONTACTS & GROUND BUSES: NICKEL UNDERPLATE ALL OVER, MATING SURFACE PLATED TO MEET LEVEL 1 PERFORMANCE REQUIREMENTS OF TE CONNECTIVITY PRODUCT SPECIFICATION 108-1422, SOLDER TAILS PLATED TIN-LEAD.
- △ DATE CODE MARKED IN AREA INDICATED ON SAME SIDE AS POSITION #1.
- △ ON GROUND BUS WITH 5 TAILS PER EACH MODULE.
- △ TOLERANCE NON-ACCUMULATIVE.
- △ FOR SLIP-FIT APPLICATIONS, ORIENTATION HOLE TO BE $\phi .079 \pm .001 [2.00 \pm 0.03]$.

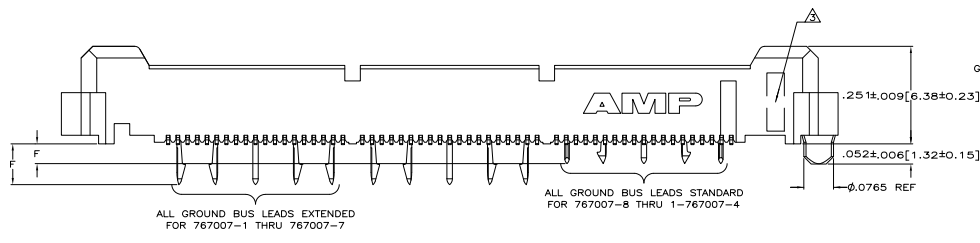

RECOMMENDED PC BOARD LAYOUT (VIEWED FROM CONNECTOR SIDE)

REV	DATE	DESCRIPTION	BY	CHK
AD	47	REVISED PER ECO-11-00485	11MM11	RK HMR

REV	DATE	DESCRIPTION	BY	CHK
AD	47	REVISED PER ECO-11-00485	11MM11	RK HMR

THIS DRAWING IS A CONTROLLED DOCUMENT.

TE Connectivity

PLUG ASSEMBLY, 260(6.6) VERTICAL, .025(0.64) GULL WING LEADS, MICTOR

108-1422

114-11004

100779-767007

CUSTOMER DRAWING