

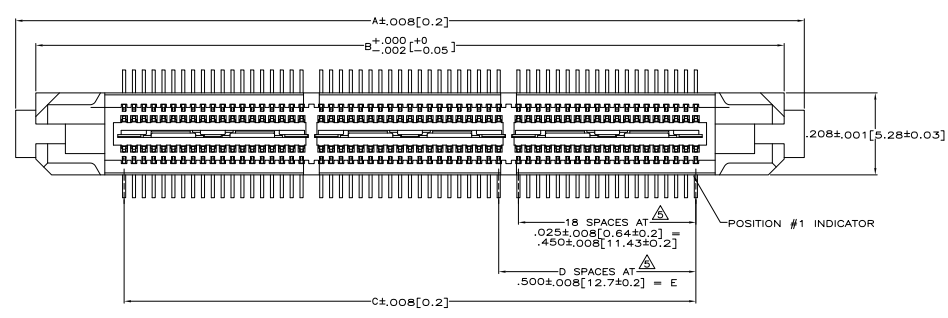
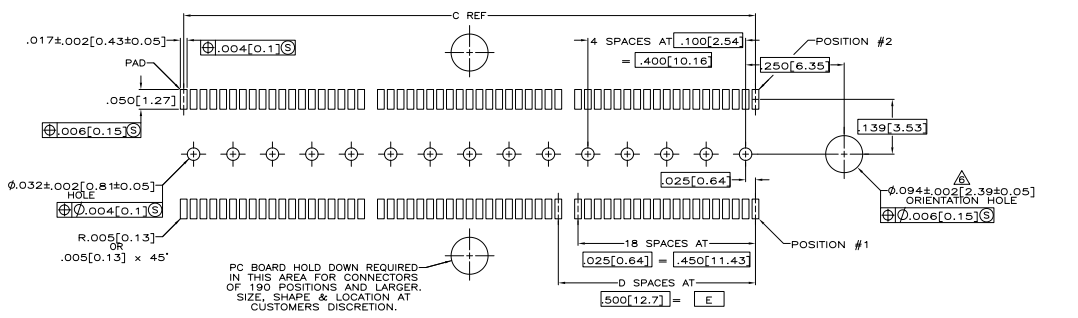


THIS DRAWING IS UNPUBLISHED  
 UNLESS INDICATED OTHERWISE  
 © 1988 AMP ELECTRONICS CORPORATION ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	CHK	APP
AD 47	7/1/88	REVISED PER ECO-08-008495			
N					

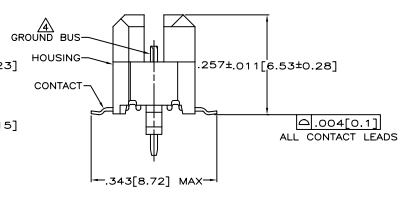

- △ HOUSING: LIQUID CRYSTAL POLYMER, COLOR BLACK.
- △ CONTACTS: HIGH RELIABILITY COPPER ALLOY.
- △ GROUND BUSES: PHOSPHOR BRONZE ALLOY, UNS C51100.
- △ CONTACTS & GROUND BUSES: NICKEL UNDERPLATE ALL OVER, MATING SURFACE PLATED TO MEET LEVEL 2 PERFORMANCE REQUIREMENTS OF TE PRODUCT SPECIFICATION 108-1422, SOLDER TAILS PLATED TIN-LEAD.
- △ DATE CODE MARKED IN AREA INDICATED ON SAME SIDE AS POSITION #1.
- △ ONE GROUND BUS WITH 5 TAILS PER EACH MODULE.
- △ TOLERANCE NON-ACCUMULATIVE.
- △ FOR SLIP-FIT APPLICATIONS, ORIENTATION HOLE TO BE  $\phi 0.79\pm 0.01[2.00\pm 0.03]$ .

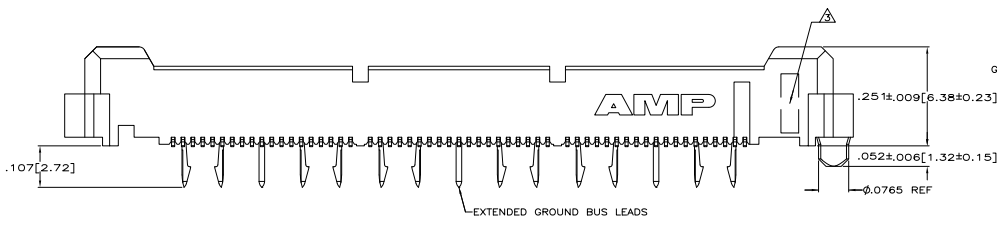

PC BOARD HOLD DOWN REQUIRED IN THIS AREA FOR CONNECTORS OF 190 POSITIONS AND LARGER. SIZE, SHAPE & LOCATION AT CUSTOMERS DISCRETION.

RECOMMENDED PC BOARD LAYOUT (VIEWED FROM CONNECTOR SIDE)

INCHES	MILLIMETERS	INCHES	MILLIMETERS	INCHES	MILLIMETERS	INCHES	MILLIMETERS
3.000[76.2]	6	3.450[87.63]	3.898[99]	4.000[101.6]	266	767056-7	
2.500[63.5]	5	2.850[72.63]	3.398[86.31]	3.500[88.9]	238	767056-6	
2.000[50.8]	4	2.450[62.23]	2.898[73.61]	3.000[76.2]	190	767056-5	
1.500[38.1]	3	1.950[49.53]	2.398[60.91]	2.500[63.5]	152	767056-4	
1.000[25.4]	2	1.450[36.81]	1.898[48.11]	2.000[50.8]	114	767056-3	
.500[12.7]	1	.950[24.13]	1.398[35.51]	1.500[38.1]	76	767056-2	
.000[0]	0	.450[11.43]	.898[22.61]	1.000[25.4]	38	767056-1	
E	D	C	B	A	NO. OF POS	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DATE	REV	BY	CHK	APP
DATE	REV	BY	CHK	APP		
108-1422						
114-11004						
A1	00779	C=767056				