
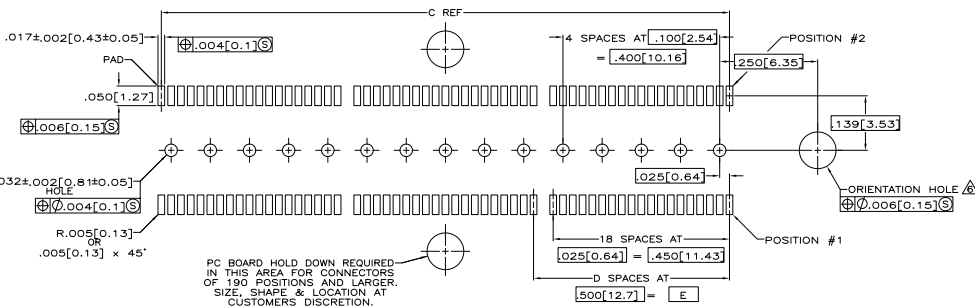
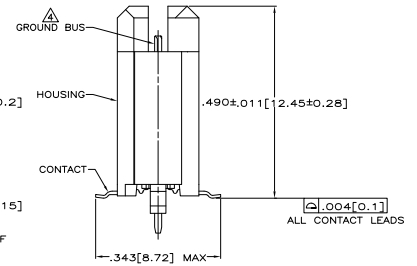


- △ HOUSING: LIQUID CRYSTAL POLYMER, COLOR BLACK.
CONTACTS: HIGH RELIABILITY COPPER ALLOY.
GROUND BUSES: PHOSPHOR BRONZE ALLOY, UNS C51100.
- △ CONTACTS & GROUND BUSES: NICKEL UNDERPLATE ALL OVER.
MATING SURFACE PLATED TO MEET LEVEL 2 PERFORMANCE
REQUIREMENTS OF TE PRODUCT SPECIFICATION 108-1422.
SOLDER TAILS PLATED TIN-LEAD.
- △ DATE CODE MARKED IN AREA INDICATED ON SAME SIDE AS
POSITION #1.
- △ ONE GROUND BUS WITH 5 TAILS PER EACH MODULE.
- △ TOLERANCE NON-ACCUMULATIVE.
- △ FOR STANDARD APPLICATIONS, ORIENTATION HOLE TO BE
ø.09±.002[2.39±0.05]
FOR SLIP-FIT APPLICATIONS, ORIENTATION HOLE TO BE
ø.079±.001[2.00±0.03].

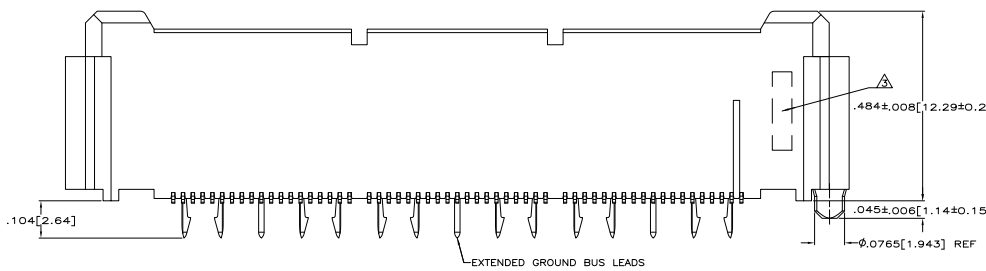

PC BOARD HOLD DOWN REQUIRED
 IN THIS AREA FOR CONNECTORS
 OF 190 POSITIONS AND LARGER.
 SIZE, SHAPE & LOCATION AT
 CUSTOMERS DISCRETION.

RECOMMENDED PC BOARD LAYOUT
 (VIEWED FROM CONNECTOR SIDE)

REV	DATE	DESCRIPTION	BY	CHK	APP	
3.000[76.2]	6	3.450[87.63]	3.808[96]	4.000[101.6]	266	767057-7
2.500[63.5]	5	2.950[74.93]	3.398[86.31]	3.600[91.4]	228	767057-6
2.000[50.8]	4	2.450[62.23]	2.898[73.61]	3.000[76.2]	190	767057-5
1.500[38.1]	3	1.950[49.53]	2.398[60.11]	2.500[63.5]	152	767057-4
1.000[25.4]	2	1.450[36.83]	1.898[48.21]	2.000[50.8]	114	767057-3
.500[12.7]	1	.950[24.13]	1.398[35.31]	1.500[38.1]	76	767057-2
.000[0]	0	.450[11.43]	.898[22.81]	1.000[25.4]	38	767057-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		REV	DATE	DESCRIPTION	BY	CHK	APP	NO. OF PARTS
DESIGNER	APPROVED	1	108-1422	PLUG ASSEMBLY, 49E[12.57] VERTICAL, .025[0.64]CL, GULL WING LEADS, MICTOR				
DATE	SCALE	114-11004	A1	00779	767057			