

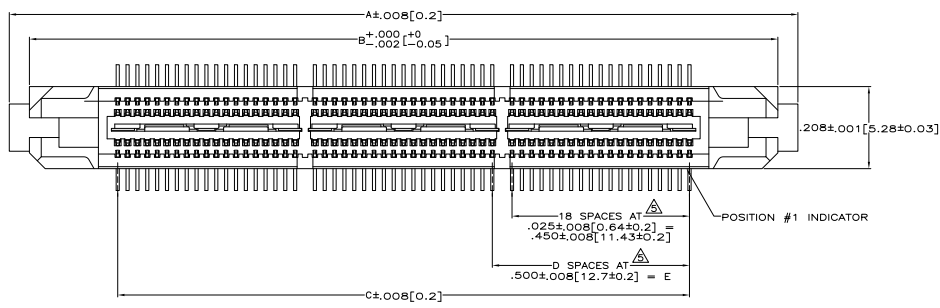
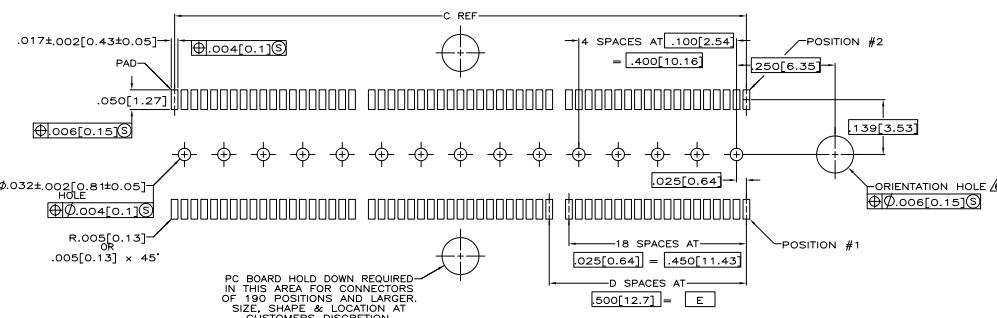


REV	DATE	DESCRIPTION	BY	CHK	APP
AD	47	REVISED PER ECO-08-009495			

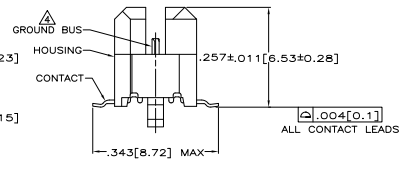

- △ HOUSING: LIQUID CRYSTAL POLYMER, COLOR BLACK.
CONTACTS: HIGH RELIABILITY COPPER ALLOY.
GROUND BUSES: PHOSPHOR BRONZE ALLOY, UNS C51100.
- △ CONTACTS & GROUND BUSES: NICKEL UNDERPLATE ALL OVER, MATING SURFACE PLATED TO MEET LEVEL 1 PERFORMANCE REQUIREMENTS OF TE PRODUCT SPECIFICATION 108-1422. SOLDER TAILS PLATED TIN-LEAD.
- △ DATE CODE MARKED IN AREA INDICATED ON SIDE OPPOSITE POSITION #1.
- △ ONE GROUND BUS WITH 5 TAILS PER EACH MODULE.
- △ TOLERANCE NON-ACCUMULATIVE.
- △ FOR STANDARD APPLICATIONS, ORIENTATION HOLE TO BE $\phi .094 \pm .002 [2.39 \pm 0.05]$.
FOR SLIP-FIT APPLICATIONS, ORIENTATION HOLE TO BE $\phi .079 \pm .001 [2.00 \pm 0.03]$.

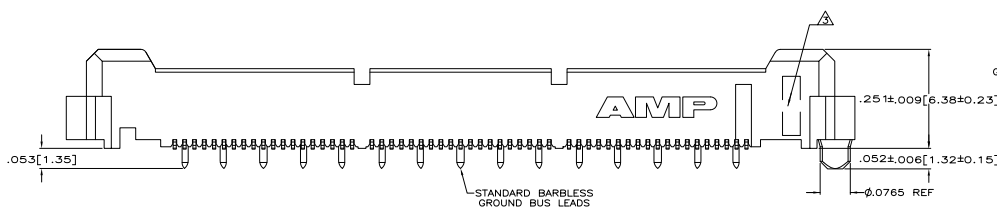

PC BOARD HOLD DOWN REQUIRED IN THIS AREA FOR CONNECTORS OF 190 POSITIONS AND LARGER. SIZE, SHAPE & LOCATION AT CUSTOMERS DISCRETION.

RECOMMENDED PC BOARD LAYOUT
 (VIEWED FROM CONNECTOR SIDE)

REV	DATE	DESCRIPTION	BY	CHK	APP			
4	724[120]	3.000[76.2]	6	3.450[87.63]	3.898[99.01]	4.000[101.6]	256	767116-7
4	084[104]	2.500[63.5]	5	2.850[72.93]	3.398[86.11]	3.500[89.0]	228	767116-6
3	465[88]	2.000[50.8]	4	2.450[62.23]	2.898[73.81]	3.000[76.2]	190	767116-5
3	465[88]	1.500[38.1]	3	1.950[49.53]	2.398[60.81]	2.500[63.5]	152	767116-4
2	805[72]	1.000[25.4]	2	1.450[36.93]	1.898[48.21]	2.000[50.8]	114	767116-3
2	205[56]	.500[12.7]	1	.950[24.13]	1.398[35.51]	1.500[38.1]	76	767116-2
1	732[44]	.000[0]	0	.450[11.43]	.898[22.81]	1.000[25.4]	38	767116-1

F	E	D	C	B	A	NO. OF POS	PART NUMBER
4	724	120	3	000	76.2	6	3.450
3	465	88	2	000	50.8	4	2.450
2	805	72	1	000	25.4	2	1.450
1	732	44	0	000	0	0	.450

THIS DRAWING IS A CONTROLLED DOCUMENT. REFERENCE TO THIS DRAWING SHOULD BE MADE TO THE DRAWING NUMBER AND DATE.

REVISIONS	DATE	DESCRIPTION	BY	CHK	APP
1	108-1422	PLUG ASSEMBLY, 260[6.6] VERTICAL, .025[0.64]JCL, GULL WING LEADS, MICTOR			
2	114-11004				

CUSTOMER DRAWING: 100779 (C=767116) SIZE: 8.1 INCHES (1" x 1" x 1")