

**LA6530M****2-channel Bridge Driver
for CD and CD-ROMs****Overview**


The LA6530M is a 2-channel bridge (BTL) driver which was developed for compact discs and CD-ROMs.

Features

- High output current (I_O max = 0.7 A).
- Wide operating voltage range (4 to 15 V).
- Small input bias current.

Package Dimensions

unit : mm

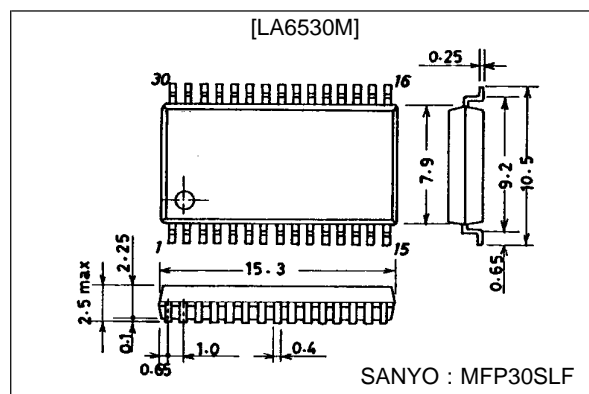3073A-MFP30SLF**Specifications****Maximum Ratings at $T_a = 25^\circ\text{C}$**

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	V_{CC} max		16	V
Differential input voltage	V_{ID}	Amplifier 2, amplifier 3	15	V
Common-mode input voltage	V_{ICM}	Amplifier 2, amplifier 3	15	V
Maximum input voltage	V_{INB}	Buffer amplifier	15	V
Mute pin maximum inflow current	I_M max		1.0	mA
Maximum output current	I_O max		0.7	A
Allowable power dissipation	P_d max		0.9	W
Operating temperature	T_{opr}		-20 to +75	$^\circ\text{C}$
Storage temperature	T_{stg}		-55 to +150	$^\circ\text{C}$

Operating Conditions at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Recommended supply voltage	V_{CC}		5.0	V
Operating voltage range	V_{CC} op		4.0 to 15.0	V
Recommended load resistance	R_L	Pin 11 to 20, pin 5 to 26	8.0	Ω

SANYO Electric Co., Ltd. Semiconductor Business Headquarters

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110 JAPAN

92995HA(II) No.5226-1/4

LA6530M


Electrical Characteristics at $T_a = 25\text{ }^\circ\text{C}$, $V_{CC} = 5.0\text{ V}$

Parameter	Symbol	Conditions	min	typ	max	Unit
No-load current drain	I_{CC1}	Mute off pins 7, 22 and 24 connected to GND	5	10	20	mA
	I_{CC2}	Mute on pins 7, 22 and 24 connected to GND	3	7	15	mA
	I_{CC3}	Mute off pins 7, 22 and 24 connected to $1/2 V_{CC}$	10	20	30	mA
	I_{CC4}	Mute on pins 7, 22 and 24 connected to $1/2 V_{CC}$	4	8	16	mA
Output offset voltage	V_{OF1}	OUT1-OUT2	-50		+50	mV
	V_{OF2}	OUT4-OUT3	-50		+50	mV
Input-output voltage difference	V_{BIO}	Buffer amplifier	-30		+30	mV
Input voltage range	V_{BICM}	Buffer amplifier	1.5		$V_{CC}-1.5$	V
Common-mode input voltage range	V_{ICM}	Amplifier 2, amplifier 3	1.0		$V_{CC}-1.5$	V
Input bias current	I_B			50	300	nA
Output voltage	V_O	8 Ω load between pins 11 — 20, 5 — 26	2.8	3.3		V
Bridge output voltage difference	V_{OD}	8 Ω load between pins 11 — 20, 5 — 26	1.8	2.2		V
Closed-circuit voltage gain	V_G	Specified Test Circuit, $f = 1\text{ kHz}$	30	38		dB
Mute on voltage	V_M			0.7		V
Mute pin inflow current	I_M			3.0		μA

*Thermal shutdown function built in.


Notes:

1. When the muting function is on, the OUT1 to OUT4 outputs are turned off and the buffer output is not turned off.
2. This IC must be handled carefully owing to its susceptibility electrostatic discharge damage.

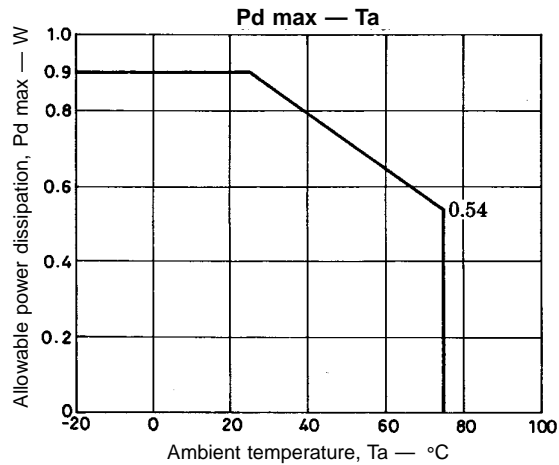

LA6530M

Block Diagram and Pin Assignment

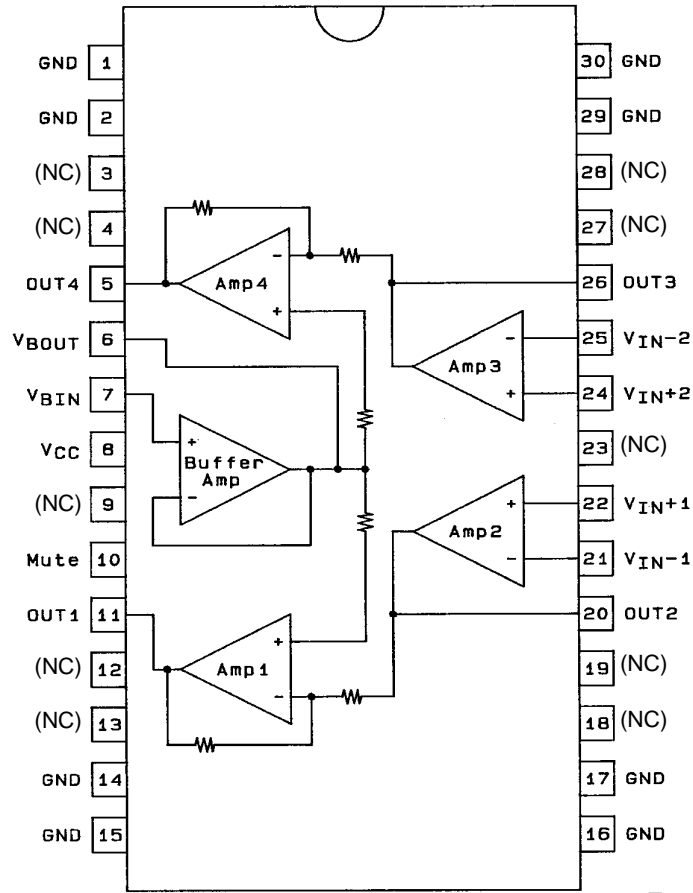

Do not use the NC pin.

Top view

A04479


Test Method

SW No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	
I _{CC1}	a	b	OFF	OFF	OFF	OFF	b	OFF	OFF	OFF	b	b	a	OFF	a	OFF	OFF	OFF	OFF	OFF	OFF	OFF	a	b
I _{CC2}	a	c	OFF	OFF	OFF	OFF	b	OFF	OFF	OFF	b	b	a	OFF	a	OFF	OFF	OFF	OFF	OFF	OFF	OFF	a	b
I _{CC3}	a	b	OFF	OFF	OFF	OFF	b	OFF	OFF	OFF	b	c	a	OFF	a	OFF	OFF	OFF	OFF	OFF	OFF	OFF	b	b
I _{CC4}	a	c	OFF	OFF	OFF	OFF	b	OFF	OFF	OFF	b	c	a	OFF	a	OFF	OFF	OFF	OFF	OFF	OFF	OFF	b	b
V _{OF1,2}	b	b	OFF	OFF	OFF	ON	b	OFF	OFF	OFF	b	c	a	OFF	a	OFF	OFF	ON	OFF	OFF	OFF	b	b	
V _{BIO}	b	b	OFF	OFF	OFF	ON	b	OFF	OFF	OFF	b	c	a	OFF	a	OFF	OFF	ON	OFF	OFF	OFF	b	b	
I _B	b	b	OFF	OFF	OFF	OFF	a	OFF	OFF	OFF	a	c	b	OFF	b	OFF	OFF	OFF	OFF	OFF	OFF	b	a	
V _O	b	b	OFF	ON	ON	OFF	b	OFF	ON	OFF	b	a	a	OFF	a	OFF	ON	OFF	ON	OFF	ON	b	b	
V _{OD}	b	b	OFF	OFF	ON	ON	b	OFF	OFF	OFF	b	a	a	OFF	a	OFF	OFF	ON	ON	OFF	OFF	b	b	
V _G	b	b	ON	OFF	OFF	OFF	a	ON	OFF	ON	b	c	a	ON	b	ON	OFF	OFF	OFF	ON	OFF	b	b	
V _M	b	a	OFF	ON	OFF	OFF	b	OFF	ON	OFF	b	c	a	OFF	a	OFF	ON	OFF	OFF	OFF	ON	b	b	

- For I_{CC1} to 4, measure the circuit current.
- For V_{OF1} and 2, measure the voltage between pins 11 and 20 and the voltage between pins 5 and 26.
- For V_{BIO}, measure the voltage between pins 7 and 6.
- For I_B, measure the voltage across the 100 kΩ resistor.
- For V_O, measure the voltage on pins 11, 20, 5 and 26 by switching the input pin voltage to 0.5 V and 4.5 V, respectively.
- For V_{OD}, measure the voltage between pins 11 and 20 and the voltage between pins 5 and 26.
- For V_G, measure the voltage on pins 11, 20, 5 and 26 at f = 1 kHz, and use the following formula:

$$V_G = 20 \log V_O/V_I \text{ dB.}$$
- V_M is the mute voltage when the mute voltage is varied and the output is turned off.

Test Circuit

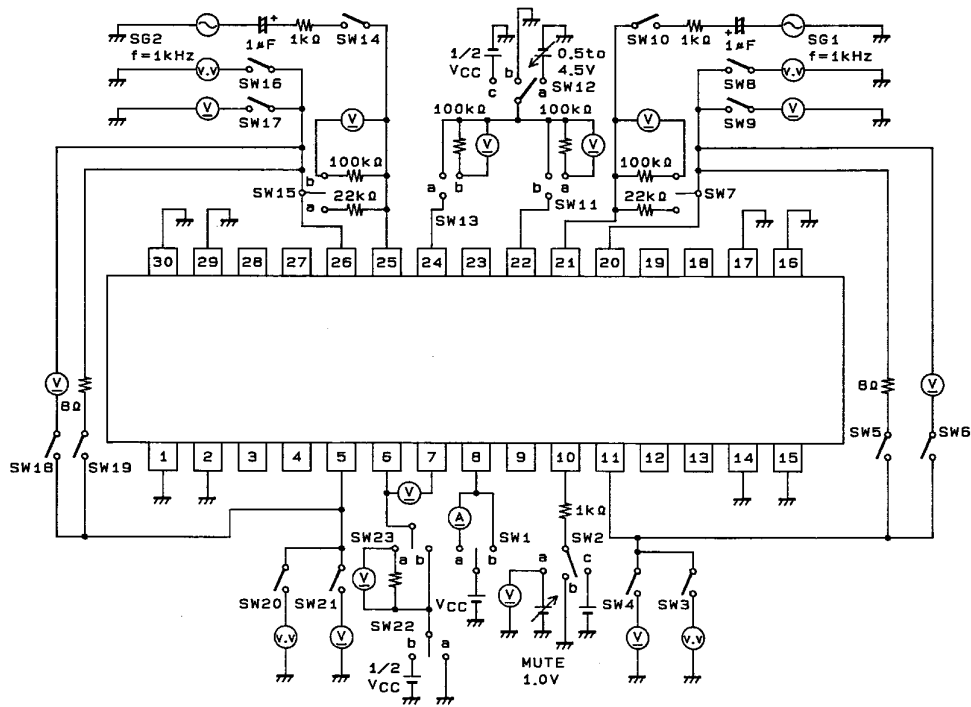

A04480

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of September, 1995. Specifications and information herein are subject to change without notice.