

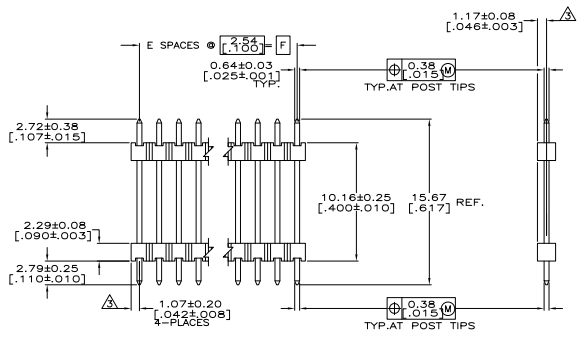


REV	DATE	DESCRIPTION	BY	CHK
AD 39				
A2		REVISED PER EDD-11-004917	11MM11	RK HMR

- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
 - TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- △ THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- △ HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
- △ FINISH: 0.00254-0.00508 [0.00100-0.00200] MATTE TIN-LEAD OVER 0.00127 [0.00050] NICKEL ENTIRE POST.
- △ FINISH: 0.00254-0.00508 [0.00100-0.00200] MATTE TIN OVER 0.00127 [0.00050] NICKEL ENTIRE POST.
- △ HIGH TEMPERATURE CONFIGURATION.



RECOMMENDED HOLE LAYOUT

101.19	99.06	39	40	9-146459-0
98.65	96.52	38	39	8-146459-9
96.11	93.98	37	38	8-146459-8
93.57	91.44	36	37	8-146459-7
91.03	88.90	35	36	8-146459-6
88.49	86.36	34	35	8-146459-5
85.95	83.82	33	34	8-146459-4
83.41	81.28	32	33	8-146459-3
80.87	78.74	31	32	8-146459-2
78.33	76.20	30	31	8-146459-1
75.79	73.66	29	30	8-146459-0
73.25	71.12	28	29	7-146459-9
70.71	68.58	27	28	7-146459-8
68.17	66.04	26	27	7-146459-7
65.63	63.50	25	26	7-146459-6
63.09	60.96	24	25	7-146459-5
60.55	58.42	23	24	7-146459-4
58.01	55.88	22	23	7-146459-3
55.47	53.34	21	22	7-146459-2
52.93	50.80	20	21	7-146459-1
50.39	48.26	19	20	7-146459-0
47.85	45.72	18	19	6-146459-9
45.31	43.18	17	18	6-146459-8
42.77	40.64	16	17	6-146459-7
40.23	38.10	15	16	6-146459-6
37.69	35.56	14	15	6-146459-5
35.15	33.02	13	14	6-146459-4
32.61	30.48	12	13	6-146459-3
30.07	27.94	11	12	6-146459-2
27.53	25.40	10	11	6-146459-1
24.99	22.86	9	10	6-146459-0
22.45	20.32	8	9	5-146459-9
19.91	17.78	7	8	5-146459-8
17.37	15.24	6	7	5-146459-7
14.83	12.70	5	6	5-146459-6
12.29	10.16	4	5	5-146459-5
9.75	7.62	3	4	5-146459-4
7.21	5.08	2	3	5-146459-3
4.67	2.54	1	2	5-146459-2
2.13	0	-	1	5-146459-1

101.19	99.06	39	40	4-146459-0
98.65	96.52	38	39	3-146459-9
96.11	93.98	37	38	3-146459-8
93.57	91.44	36	37	3-146459-7
91.03	88.90	35	36	3-146459-6
88.49	86.36	34	35	3-146459-5
85.95	83.82	33	34	3-146459-4
83.41	81.28	32	33	3-146459-3
80.87	78.74	31	32	3-146459-2
78.33	76.20	30	31	3-146459-1
75.79	73.66	29	30	3-146459-0
73.25	71.12	28	29	2-146459-9
70.71	68.58	27	28	2-146459-8
68.17	66.04	26	27	2-146459-7
65.63	63.50	25	26	2-146459-6
63.09	60.96	24	25	2-146459-5
60.55	58.42	23	24	2-146459-4
58.01	55.88	22	23	2-146459-3
55.47	53.34	21	22	2-146459-2
52.93	50.80	20	21	2-146459-1
50.39	48.26	19	20	2-146459-0
47.85	45.72	18	19	1-146459-9
45.31	43.18	17	18	1-146459-8
42.77	40.64	16	17	1-146459-7
40.23	38.10	15	16	1-146459-6
37.69	35.56	14	15	1-146459-5
35.15	33.02	13	14	1-146459-4
32.61	30.48	12	13	1-146459-3
30.07	27.94	11	12	1-146459-2
27.53	25.40	10	11	1-146459-1
24.99	22.86	9	10	1-146459-0
22.45	20.32	8	9	146459-9
19.91	17.78	7	8	146459-8
17.37	15.24	6	7	146459-7
14.83	12.70	5	6	146459-6
12.29	10.16	4	5	146459-5
9.75	7.62	3	4	146459-4
7.21	5.08	2	3	146459-3
4.67	2.54	1	2	146459-2
2.13	0	-	1	146459-1

REMARKS	PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. **TE CONNECTIVITY**

INCHES (mm) DIMENSIONS: UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (mm).

DATE: 01/00/79
 DRAWING NO: 146459
 CUSTOMER DRAWING