


THIS DRAWING IS UNAPPROVED FOR PRODUCTION  
 ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	CHK	APP
AD 39		REVISED PER ECD-11-004917			

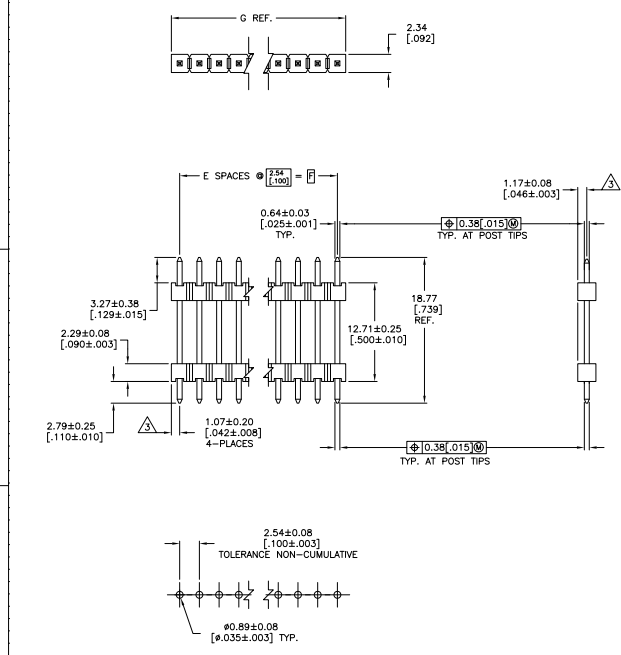

RECOMMENDED HOLE LAYOUT

- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
  - TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- ▲ THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING  
 ▲ HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.  
 ▲ FINISH: 0.00254-0.00508 [0.000100-0.000200] MATTE TIN-LEAD OVER 0.00127 [0.000050] NICKEL ENTIRE POST.  
 ▲ FINISH: 0.00254-0.00508 [0.000100-0.000200] MATTE TIN OVER 0.00127 [0.000050] NICKEL ENTIRE POST.

PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER
▲	98.65	96.52	39	40	9-146461-0
▲	101.19	99.06	38	39	8-146461-9
▲	3.984	3.900	37	38	8-146461-8
▲	95.11	93.98	36	37	8-146461-7
▲	3.784	3.700	35	36	8-146461-6
▲	93.57	91.44	34	35	8-146461-5
▲	3.584	3.500	33	34	8-146461-4
▲	91.03	88.90	32	33	8-146461-3
▲	89.49	87.36	31	32	8-146461-2
▲	3.484	3.400	30	31	8-146461-1
▲	85.95	83.82	29	30	8-146461-0
▲	3.384	3.300	28	29	7-146461-9
▲	83.41	81.28	27	28	7-146461-8
▲	3.284	3.200	26	27	7-146461-7
▲	80.87	78.74	25	26	7-146461-6
▲	3.184	3.100	24	25	7-146461-5
▲	78.33	76.20	23	24	7-146461-4
▲	3.084	3.000	22	23	7-146461-3
▲	75.79	73.66	21	22	7-146461-2
▲	2.984	2.900	20	21	7-146461-1
▲	73.25	71.12	19	20	6-146461-9
▲	2.884	2.800	18	19	6-146461-8
▲	70.71	68.58	17	18	6-146461-7
▲	2.784	2.700	16	17	6-146461-6
▲	68.17	66.04	15	16	6-146461-5
▲	2.684	2.600	14	15	6-146461-4
▲	65.63	63.50	13	14	6-146461-3
▲	2.584	2.500	12	13	6-146461-2
▲	63.09	60.96	11	12	6-146461-1
▲	2.484	2.400	10	11	6-146461-0
▲	60.55	58.42	9	10	5-146461-9
▲	2.384	2.300	8	9	5-146461-8
▲	58.01	55.88	7	8	5-146461-7
▲	2.284	2.200	6	7	5-146461-6
▲	55.47	53.34	5	6	5-146461-5
▲	2.184	2.100	4	5	5-146461-4
▲	52.93	50.80	3	4	5-146461-3
▲	2.084	2.000	2	3	5-146461-2
▲	50.39	48.26	1	2	5-146461-1
▲	1.984	1.900	-	-	-
▲	47.85	45.72	-	-	-
▲	1.884	1.800	-	-	-
▲	45.31	43.18	-	-	-
▲	1.784	1.700	-	-	-
▲	42.77	40.64	-	-	-
▲	1.684	1.600	-	-	-
▲	40.23	38.10	-	-	-
▲	1.584	1.500	-	-	-
▲	37.69	35.56	-	-	-
▲	1.484	1.400	-	-	-
▲	35.15	33.02	-	-	-
▲	1.384	1.300	-	-	-
▲	32.61	30.48	-	-	-
▲	1.284	1.200	-	-	-
▲	30.07	27.94	-	-	-
▲	1.184	1.100	-	-	-
▲	27.53	25.40	-	-	-
▲	1.084	1.000	-	-	-
▲	24.99	22.86	-	-	-
▲	0.984	0.900	-	-	-
▲	22.45	20.32	-	-	-
▲	0.884	0.800	-	-	-
▲	19.91	17.78	-	-	-
▲	0.784	0.700	-	-	-
▲	17.37	15.24	-	-	-
▲	0.684	0.600	-	-	-
▲	14.83	12.70	-	-	-
▲	0.584	0.500	-	-	-
▲	12.29	10.16	-	-	-
▲	0.484	0.400	-	-	-
▲	9.75	7.62	-	-	-
▲	0.384	0.300	-	-	-
▲	7.21	5.08	-	-	-
▲	0.284	0.200	-	-	-
▲	4.67	2.54	-	-	-
▲	0.184	0.100	-	-	-
▲	2.13	-	-	-	-
▲	0.084	-	-	-	-

PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER
▲	98.65	96.52	39	40	4-146461-0
▲	101.19	99.06	38	39	3-146461-9
▲	3.984	3.900	37	38	3-146461-8
▲	95.11	93.98	36	37	3-146461-7
▲	3.784	3.700	35	36	3-146461-6
▲	93.57	91.44	34	35	3-146461-5
▲	3.584	3.500	33	34	3-146461-4
▲	91.03	88.90	32	33	3-146461-3
▲	89.49	87.36	31	32	3-146461-2
▲	3.484	3.400	30	31	3-146461-1
▲	85.95	83.82	29	30	3-146461-0
▲	3.384	3.300	28	29	2-146461-9
▲	83.41	81.28	27	28	2-146461-8
▲	3.284	3.200	26	27	2-146461-7
▲	80.87	78.74	25	26	2-146461-6
▲	3.184	3.100	24	25	2-146461-5
▲	78.33	76.20	23	24	2-146461-4
▲	3.084	3.000	22	23	2-146461-3
▲	75.79	73.66	21	22	2-146461-2
▲	2.984	2.900	20	21	2-146461-1
▲	73.25	71.12	19	20	2-146461-0
▲	2.884	2.800	18	19	1-146461-9
▲	70.71	68.58	17	18	1-146461-8
▲	2.784	2.700	16	17	1-146461-7
▲	68.17	66.04	15	16	1-146461-6
▲	2.684	2.600	14	15	1-146461-5
▲	65.63	63.50	13	14	1-146461-4
▲	2.584	2.500	12	13	1-146461-3
▲	63.09	60.96	11	12	1-146461-2
▲	2.484	2.400	10	11	1-146461-1
▲	60.55	58.42	9	10	1-146461-0
▲	2.384	2.300	8	9	1-146461-9
▲	58.01	55.88	7	8	1-146461-8
▲	2.284	2.200	6	7	1-146461-7
▲	55.47	53.34	5	6	1-146461-6
▲	2.184	2.100	4	5	1-146461-5
▲	52.93	50.80	3	4	1-146461-4
▲	2.084	2.000	2	3	1-146461-3
▲	50.39	48.26	1	2	1-146461-2
▲	1.984	1.900	-	-	-
▲	47.85	45.72	-	-	-
▲	1.884	1.800	-	-	-
▲	45.31	43.18	-	-	-
▲	1.784	1.700	-	-	-
▲	42.77	40.64	-	-	-
▲	1.684	1.600	-	-	-
▲	40.23	38.10	-	-	-
▲	1.584	1.500	-	-	-
▲	37.69	35.56	-	-	-
▲	1.484	1.400	-	-	-
▲	35.15	33.02	-	-	-
▲	1.384	1.300	-	-	-
▲	32.61	30.48	-	-	-
▲	1.284	1.200	-	-	-
▲	30.07	27.94	-	-	-
▲	1.184	1.100	-	-	-
▲	27.53	25.40	-	-	-
▲	1.084	1.000	-	-	-
▲	24.99	22.86	-	-	-
▲	0.984	0.900	-	-	-
▲	22.45	20.32	-	-	-
▲	0.884	0.800	-	-	-
▲	19.91	17.78	-	-	-
▲	0.784	0.700	-	-	-
▲	17.37	15.24	-	-	-
▲	0.684	0.600	-	-	-
▲	14.83	12.70	-	-	-
▲	0.584	0.500	-	-	-
▲	12.29	10.16	-	-	-
▲	0.484	0.400	-	-	-
▲	9.75	7.62	-	-	-
▲	0.384	0.300	-	-	-
▲	7.21	5.08	-	-	-
▲	0.284	0.200	-	-	-
▲	4.67	2.54	-	-	-
▲	0.184	0.100	-	-	-
▲	2.13	-	-	-	-
▲	0.084	-	-	-	-

THIS DRAWING IS A CONTROLLED DOCUMENT. IT IS THE PROPERTY OF TE CONNECTIVITY. IT IS TO BE USED ONLY FOR THE PURPOSES AND IN THE QUANTITIES SPECIFIED IN THE ORDER. IT IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF TE CONNECTIVITY.

TE Connectivity  
 TE CONNECTIVITY  
 TE CONNECTIVITY  
 TE CONNECTIVITY

HEADERS ASSEMBLY, MOD II, STACKING, SINGLE ROW, 0.254 SQ. POST, UNSHROUDED

REVISED PER ECD-11-004917

SEE TABLE

CUSTOMER DRAWING

DATE: 000779

REV: 4.1

REVISED PER ECD-11-004917