

## 3W Filter-free Class D Audio Power Amplifier

PRELIMINARY DATA

- Operating from  $V_{CC}=2.4V$  to  $5.5V$
- Standby mode active low
- Output power:  $3W$  into  $4\Omega$  and  $1.75W$  into  $8\Omega$  with 10% THD+N max and  $5V$  power supply.
- Output power:  $2.3W$  @ $5V$  or  $0.75W$  @  $3.0V$  into  $4\Omega$  with 1% THD+N max.
- Output power:  $1.4W$  @ $5V$  or  $0.45W$  @  $3.0V$  into  $8\Omega$  with 1% THD+N max.
- Adjustable gain via external resistors
- Low current consumption  $2mA$  @  $3V$
- Efficiency: 88% typ.
- Signal to noise ratio: 85dB typ.
- PSRR: 63dB typ. @217Hz with 6dB gain
- PWM base frequency: 250kHz
- Low pop & click noise
- Thermal shutdown protection
- Available in flip-chip  $9 \times 300\mu m$  in lead free\*

### Description

The TS4962 is a differential class-D B.T.L. power amplifier. Able to drive up to  $2.3W$  into a  $4\Omega$  load and  $1.4W$  into a  $8\Omega$  load at  $5V$ . It achieves outstanding efficiency (88%typ.) compared to classical AB-class audio amps.

Gain of the device can be controlled via two external gain setting resistors. POP & CLICK reduction circuitry provides low on/off switch noise while allowing the device to start within 5ms. A standby function (active low) allows to lower the current consumption to  $10nA$  typ.


### Applications

- Cellular Phone
- PDA
- Notebook PC

### Order Codes

Part Number	Temperature Range	Package	Packaging	Marking
TS4962IJT	-40, +85°C	Flip-Chip	Tape & Reel	A62
TS4962EIJT	-40, +85°C	Lead -Free Flip-Chip		A62
TS4962EKIJT	-40, +85°C	Lead Free + Back Coating		A62

### Pin Connections (top view)

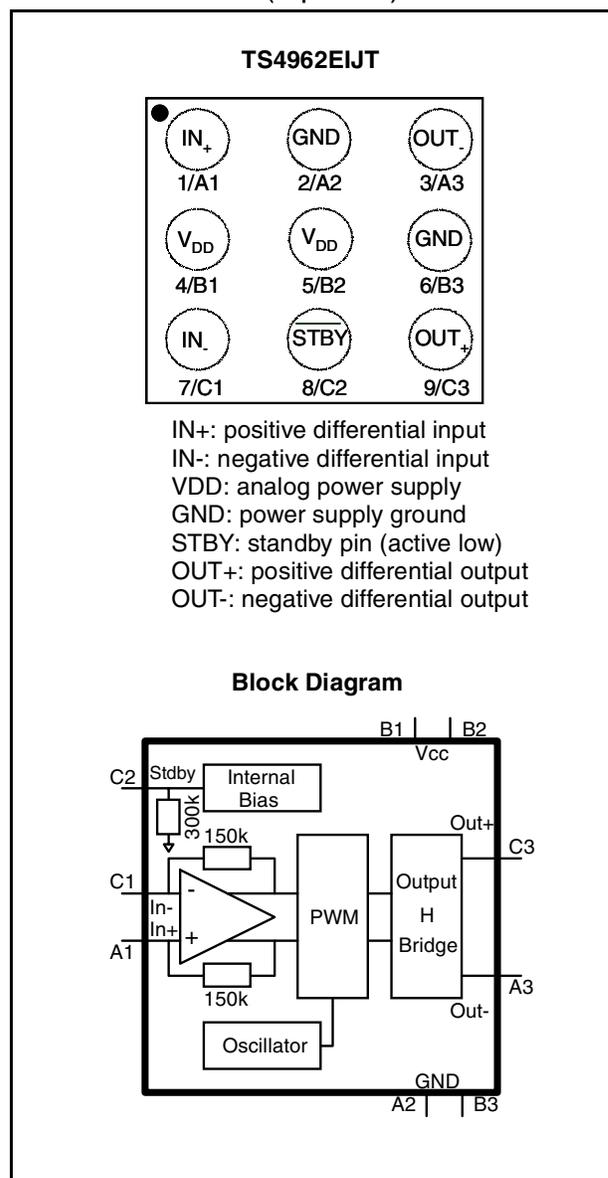

## 1 Absolute Maximum Ratings

**Table 1. Key parameters and their absolute maximum ratings**

Symbol	Parameter	Value	Unit
$V_{CC}$	Supply voltage <sup>1</sup>	6	V
$V_i$	Input Voltage <sup>2</sup>	$G_{ND}$ to $V_{CC}$	V
$T_{oper}$	Operating Free Air Temperature Range	-40 to + 85	°C
$T_{stg}$	Storage Temperature	-65 to +150	°C
$T_j$	Maximum Junction Temperature	150	°C
$R_{thja}$	Thermal Resistance Junction to Ambient <sup>3</sup>	200	°C/W
$P_d$	Power Dissipation	Internally Limited <sup>4</sup>	
ESD	Human Body Model	2	kV
ESD	Machine Model	200	V
Latch-up	Latch-up Immunity	200	mA
$V_{STB}$	Standby pin voltage maximum voltage <sup>5</sup>	$G_{ND}$ to $V_{CC}$	V
	Lead Temperature (soldering, 10sec)	260	°C

- 1) All voltages values are measured with respect to the ground pin.
- 2) The magnitude of input signal must never exceed  $V_{CC} + 0.3V / G_{ND} - 0.3V$
- 3) Device is protected in case of over temperature by a thermal shutdown active @ 150°C.
- 4) Exceeding the power derating curves during a long period, involves abnormal operating condition.
- 5) The magnitude of standby signal must never exceed  $V_{CC} + 0.3V / G_{ND} - 0.3V$

**Table 2. Operating Conditions**


Symbol	Parameter	Value	Unit
$V_{CC}$	Supply Voltage <sup>1</sup>	2.4 to 5.5	V
$V_{IC}$	Common Mode Input Voltage Range <sup>2</sup>	0.5 to $V_{CC}-0.8$	V
$V_{STB}$	Standby Voltage Input : <sup>3</sup> Device ON Device OFF	$1.4 \leq V_{STB} \leq V_{CC}$ $G_{ND} \leq V_{STB} \leq 0.4$ <sup>4</sup>	V
RL	Load Resistor	$\geq 4$	$\Omega$
$R_{thja}$	Thermal Resistance Junction to Ambient <sup>5</sup>	90	°C/W

- 1) For  $V_{CC}$  from 2.4V to 2.5V, the operating temperature range is reduced to  $0^\circ\text{C} \leq T_{amb} \leq 70^\circ\text{C}$
- 2) For  $V_{CC}$  from 2.4V to 2.5V, the common mode input range must be set at  $V_{CC}/2$ .
- 3) Without any signal on  $V_{STB}$ , the device will be in standby
- 4) Minimum current consumption shall be obtained when  $V_{STB} = GND$ .
- 5) With heat sink surface = 125mm<sup>2</sup>.

## 2 Application Component Information

Component	Functional Description
Cs	Bypass supply capacitor. To install as close as possible of the TS4962 to minimize high frequency ripple. A 100nF ceramic capacitor should be add to enhance the power supply filtering in high frequency.
Rin	Input resistor to program the TS4962 differential gain (Gain = $300k\Omega/R_{in}$ with Rin in k $\Omega$ )
Input Capacitor	Thanks to common mode feedback, these input capacitors are optional. However, we can add them to form with Rin a 1st order high pass filter with $-3dB$ cut-off frequency = $1/(2*\pi*R_{in}*C_{in})$

Figure 1. Typical application

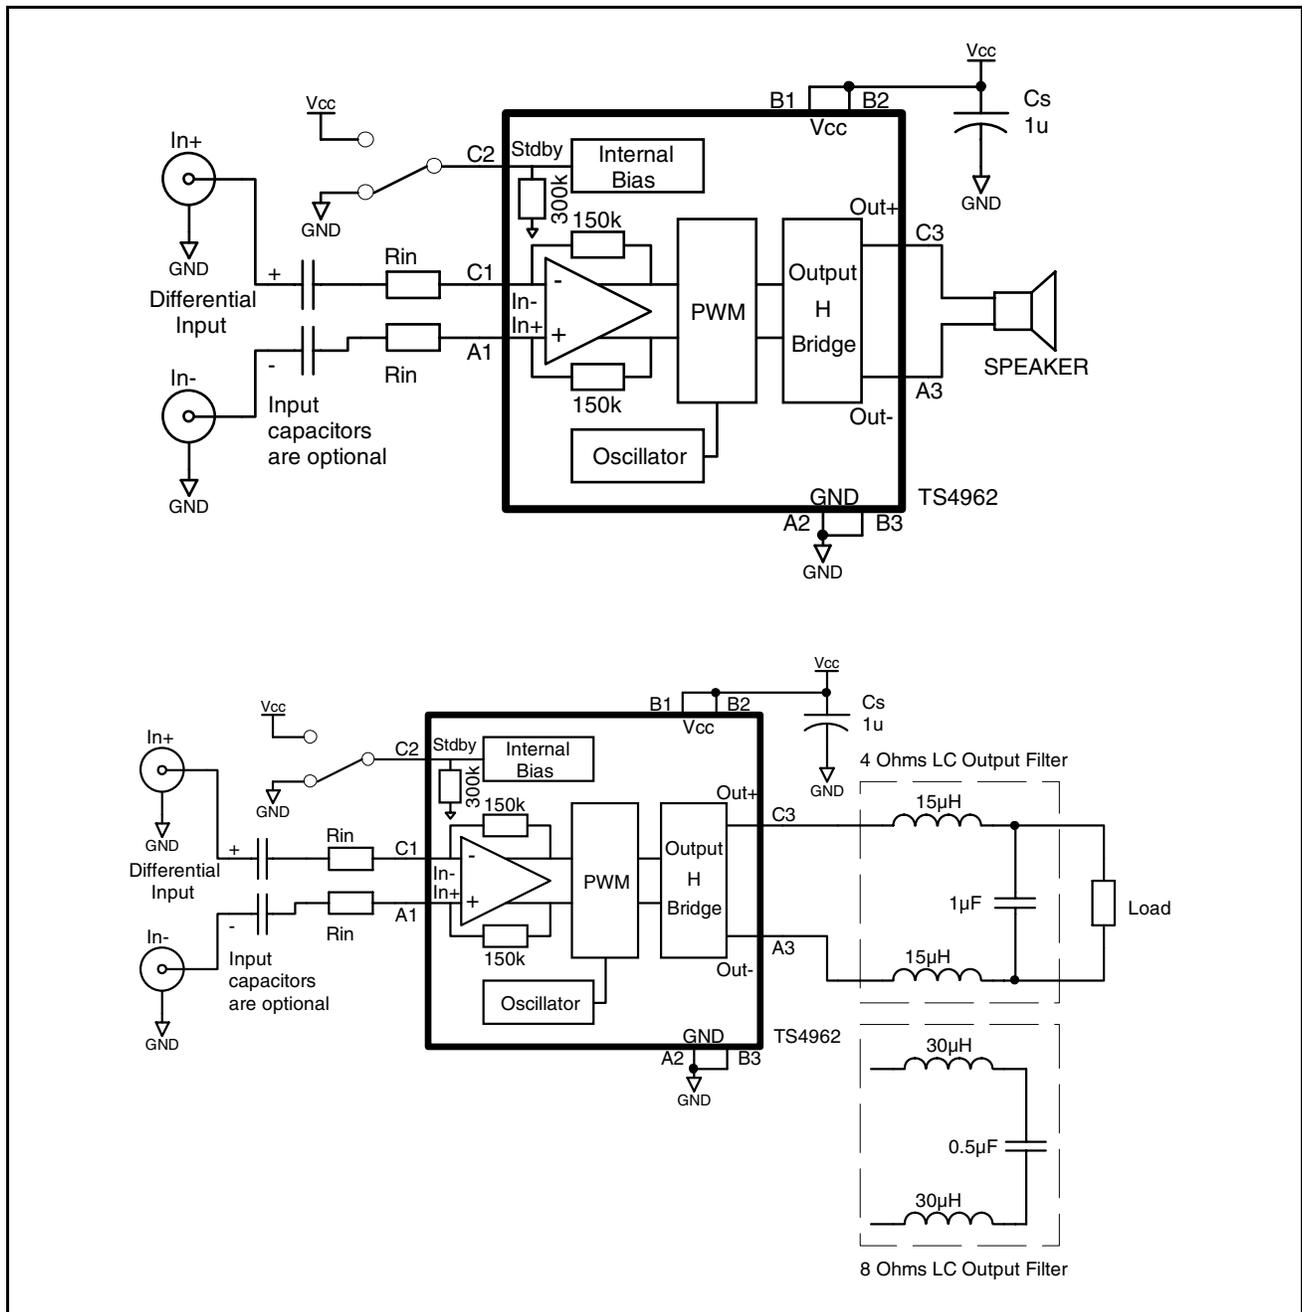

### 3 Electrical Characteristics

Table 3.  $V_{CC} = +5V$ ,  $GND = 0V$ ,  $V_{ICM} = 2.5V$ ,  $T_{amb} = 25^{\circ}C$  (unless otherwise specified)

Symbol	Parameter	Min.	Typ.	Max.	Unit
$I_{CC}$	Supply Current No input signal, no load		2.3	3.3	mA
$I_{STANDBY}$	Standby Current <sup>1</sup> No input signal, $V_{STBY} = GND$		10	1000	nA
$V_{OO}$	Output Offset Voltage No input signal, $R_L = 8\Omega$		3	25	mV
$P_o$	Output Power, $G=6dB$ THD = 1% Max, $f = 1kHz$ , $R_L = 4\Omega$ THD = 10% Max, $f = 1kHz$ , $R_L = 4\Omega$ THD = 1% Max, $f = 1kHz$ , $R_L = 8\Omega$ THD = 10% Max, $f = 1kHz$ , $R_L = 8\Omega$		2.3 3 1.4 1.75		W
THD + N	Total Harmonic Distortion + Noise $P_o = 900 mW_{RMS}$ , $G = 6dB$ , $20Hz < f < 20kHz$ , $R_L = 8\Omega + 15\mu H$ , $BW < 30kHz$ $P_o = 1W_{RMS}$ , $G = 6dB$ , $f = 1kHz$ , $R_L = 8\Omega + 15\mu H$ , $BW < 30kHz$		1 0.4		%
Efficiency	Efficiency $P_o = 2 W_{RMS}$ , $R_L = 4\Omega + \geq 15\mu H$ $P_o = 1.2 W_{RMS}$ , $R_L = 8\Omega + \geq 15\mu H$		78 88		%
PSRR	Power Supply Rejection Ratio with inputs grounded <sup>2</sup> $f = 217Hz$ , $R_L = 8\Omega$ , $G=6dB$ , $V_{ripple} = 200mV_{pp}$		63		dB
CMRR	Common Mode Rejection Ratio, $f = 217Hz$ , $R_L = 8\Omega$ , $G = 6dB$ , $\Delta V_{ic} = 200mV_{pp}$		57		dB
Gain	Gain value ( $R_{in}$ in $k\Omega$ )	$\frac{273k\Omega}{R_{in}}$	$\frac{300k\Omega}{R_{in}}$	$\frac{327k\Omega}{R_{in}}$	V/V
$R_{STDBY}$	Internal Resistance From Standby to GND	273	300	327	$k\Omega$
$F_{PWM}$	Pulse Width Modulator Base Frequency	180	250	320	kHz
SNR	Signal to Noise ratio (A Weighting), $P_o = 1.2W$ , $R_L = 8\Omega$		85		dB
$T_{WU}$	Wake-up time		5	10	ms
$T_{STB}$	Standby time		5	10	ms
$V_N$	Output Voltage Noise $f = 20Hz$ to $20kHz$ , $G = 6dB$ Unweighted $R_L = 4\Omega$ A weighted $R_L = 4\Omega$ Unweighted $R_L = 8\Omega$ A weighted $R_L = 8\Omega$ Unweighted $R_L = 4\Omega + 15\mu H$ A weighted $R_L = 4\Omega + 15\mu H$ Unweighted $R_L = 4\Omega + 30\mu H$ A weighted $R_L = 4\Omega + 30\mu H$ Unweighted $R_L = 8\Omega + 30\mu H$ A weighted $R_L = 8\Omega + 30\mu H$ Unweighted $R_L = 4\Omega + Filter$ A weighted $R_L = 4\Omega + Filter$ Unweighted $R_L = 4\Omega + Filter$ A weighted $R_L = 4\Omega + Filter$		85 60 86 62 83 60 88 64 78 57 87 65 82 59 90 66		$\mu V_{RMS}$

1) Standby mode is active when  $V_{stdby}$  is tied to GND.

2) Dynamic measurements -  $20 \cdot \log(\text{rms}(V_{out})/\text{rms}(V_{ripple}))$ .  $V_{ripple}$  is the surimposed sinus signal to  $V_{cc}$  @  $f = 217Hz$ .

Table 4.  $V_{CC} = +4.2V$ ,  $GND = 0V$ ,  $V_{ICM} = 2.1V$ ,  $T_{amb} = 25^{\circ}C$  (unless otherwise specified) <sup>1</sup>

Symbol	Parameter	Min.	Typ.	Max.	Unit
$I_{CC}$	Supply Current No input signal, no load		2.1	3	mA
$I_{STANDBY}$	Standby Current <sup>2</sup> No input signal, $V_{STBY} = GND$		10	1000	nA
$V_{OO}$	Output Offset Voltage No input signal, $R_L = 8\Omega$		3	25	mV
$P_o$	Output Power, $G=6dB$ THD = 1% Max, $f = 1kHz$ , $R_L = 4\Omega$ THD = 10% Max, $f = 1kHz$ , $R_L = 4\Omega$ THD = 1% Max, $f = 1kHz$ , $R_L = 8\Omega$ THD = 10% Max, $f = 1kHz$ , $R_L = 8\Omega$		1.6 2 0.95 1.2		W
THD + N	Total Harmonic Distortion + Noise $P_o = 600 mW_{RMS}$ , $G = 6dB$ , $20Hz < f < 20kHz$ , $R_L = 8\Omega + 15\mu H$ , $BW < 30kHz$ $P_o = 700mW_{RMS}$ , $G = 6dB$ , $f = 1kHz$ , $R_L = 8\Omega + 15\mu H$ , $BW < 30kHz$		1 0.35		%
Efficiency	Efficiency $P_o = 1.45 W_{RMS}$ , $R_L = 4\Omega + \geq 15\mu H$ $P_o = 0.9 W_{RMS}$ , $R_L = 8\Omega + \geq 15\mu H$		78 88		%
PSRR	Power Supply Rejection Ratio with inputs grounded <sup>3</sup> $f = 217Hz$ , $R_L = 8\Omega$ , $G=6dB$ , $V_{ripple} = 200mV_{pp}$		63		dB
CMRR	Common Mode Rejection Ratio $f = 217Hz$ , $R_L = 8\Omega$ , $G = 6dB$ , $\Delta V_{ic} = 200mV_{pp}$		57		dB
Gain	Gain value ( $R_{in}$ in $k\Omega$ )	$\frac{273k\Omega}{R_{in}}$	$\frac{300k\Omega}{R_{in}}$	$\frac{327k\Omega}{R_{in}}$	V/V
$R_{STDBY}$	Internal Resistance From Standby to GND	273	300	327	$k\Omega$
$F_{PWM}$	Pulse Width Modulator Base Frequency	180	250	320	kHz
SNR	Signal to Noise ratio (A Weighting), $P_o = 0.9W$ , $R_L = 8\Omega$		85		dB
$T_{WU}$	Wake-up time		5	10	ms
$T_{STB}$	Standby time		5	10	ms
$V_N$	Output Voltage Noise $f = 20Hz$ to $20kHz$ , $G = 6dB$ Unweighted $R_L = 4\Omega$ A weighted $R_L = 4\Omega$ Unweighted $R_L = 8\Omega$ A weighted $R_L = 8\Omega$ Unweighted $R_L = 4\Omega + 15\mu H$ A weighted $R_L = 4\Omega + 15\mu H$ Unweighted $R_L = 4\Omega + 30\mu H$ A weighted $R_L = 4\Omega + 30\mu H$ Unweighted $R_L = 8\Omega + 30\mu H$ A weighted $R_L = 8\Omega + 30\mu H$ Unweighted $R_L = 4\Omega + Filter$ A weighted $R_L = 4\Omega + Filter$ Unweighted $R_L = 4\Omega + Filter$ A weighted $R_L = 4\Omega + Filter$		85 60 86 62 83 60 88 64 78 57 87 65 82 59 90 66		$\mu V_{RMS}$

1) All electrical values are guaranteed with correlation measurements at 2.5V and 5V.

2) Standby mode is activated when  $V_{stdby}$  is tied to GND.

3) Dynamic measurements -  $20 \cdot \log(\text{rms}(V_{out})/\text{rms}(V_{ripple}))$ .  $V_{ripple}$  is the surimposed sinus signal to  $V_{cc}$  @  $f = 217Hz$ .

Table 5.  $V_{CC} = +3.6V$ ,  $GND = 0V$ ,  $V_{ICM} = 1.8V$ ,  $T_{amb} = 25^{\circ}C$  (unless otherwise specified) <sup>1</sup>

Symbol	Parameter	Min.	Typ.	Max.	Unit
$I_{CC}$	Supply Current No input signal, no load		2	2.8	mA
$I_{STANDBY}$	Standby Current <sup>2</sup> No input signal, $V_{STBY} = GND$		10	1000	nA
$V_{OO}$	Output Offset Voltage No input signal, $R_L = 8\Omega$		3	25	mV
$P_o$	Output Power, $G=6dB$ THD = 1% Max, $f = 1kHz$ , $R_L = 4\Omega$ THD = 10% Max, $f = 1kHz$ , $R_L = 4\Omega$ THD = 1% Max, $f = 1kHz$ , $R_L = 8\Omega$ THD = 10% Max, $f = 1kHz$ , $R_L = 8\Omega$		1.15 1.51 0.7 0.9		W
THD + N	Total Harmonic Distortion + Noise $P_o = 500 mW_{RMS}$ , $G = 6dB$ , $20Hz < f < 20kHz$ , $R_L = 8\Omega + 15\mu H$ , $BW < 30kHz$ $P_o = 500mW_{RMS}$ , $G = 6dB$ , $f = 1kHz$ , $R_L = 8\Omega + 15\mu H$ , $BW < 30kHz$		1 0.27		%
Efficiency	Efficiency $P_o = 1 W_{RMS}$ , $R_L = 4\Omega + \geq 15\mu H$ $P_o = 0.65 W_{RMS}$ , $R_L = 8\Omega + \geq 15\mu H$		78 88		%
PSRR	Power Supply Rejection Ratio with inputs grounded <sup>3</sup> $f = 217Hz$ , $R_L = 8\Omega$ , $G=6dB$ , $V_{ripple} = 200mV_{pp}$		62		dB
CMRR	Common Mode Rejection Ratio $f = 217Hz$ , $R_L = 8\Omega$ , $G = 6dB$ , $\Delta V_{ic} = 200mV_{pp}$		56		dB
Gain	Gain value ( $R_{in}$ in $k\Omega$ )	$\frac{273k\Omega}{R_{in}}$	$\frac{300k\Omega}{R_{in}}$	$\frac{327k\Omega}{R_{in}}$	V/V
$R_{STDBY}$	Internal Resistance From Standby to GND	273	300	327	$k\Omega$
$F_{PWM}$	Pulse Width Modulator Base Frequency	180	250	320	kHz
SNR	Signal to Noise ratio (A Weighting), $P_o = 0.6W$ , $R_L = 8\Omega$		83		dB
$T_{WU}$	Wake-up time		5	10	ms
$T_{STB}$	Standby time		5	10	ms
$V_N$	Output Voltage Noise $f = 20Hz$ to $20kHz$ , $G = 6dB$ Unweighted $R_L = 4\Omega$ A weighted $R_L = 4\Omega$ Unweighted $R_L = 8\Omega$ A weighted $R_L = 8\Omega$ Unweighted $R_L = 4\Omega + 15\mu H$ A weighted $R_L = 4\Omega + 15\mu H$ Unweighted $R_L = 4\Omega + 30\mu H$ A weighted $R_L = 4\Omega + 30\mu H$ Unweighted $R_L = 8\Omega + 30\mu H$ A weighted $R_L = 8\Omega + 30\mu H$ Unweighted $R_L = 4\Omega + Filter$ A weighted $R_L = 4\Omega + Filter$ Unweighted $R_L = 4\Omega + Filter$ A weighted $R_L = 4\Omega + Filter$		83 57 83 61 81 58 87 62 77 56 85 63 80 57 85 61		$\mu V_{RMS}$

1) All electrical values are guaranteed with correlation measurements at 2.5V and 5V.

2) Standby mode is activated when  $V_{stdby}$  is tied to GND.

3) Dynamic measurements -  $20 \cdot \log(\text{rms}(V_{out})/\text{rms}(V_{ripple}))$ .  $V_{ripple}$  is the surimposed sinus signal to  $V_{cc}$  @  $f = 217Hz$ .

Table 6.  $V_{CC} = +3.0V$ ,  $GND = 0V$ ,  $V_{ICM} = 1.5V$ ,  $T_{amb} = 25^{\circ}C$  (unless otherwise specified) <sup>1</sup>

Symbol	Parameter	Min.	Typ.	Max.	Unit
$I_{CC}$	Supply Current No input signal, no load		1.9	2.7	mA
$I_{STANDBY}$	Standby Current <sup>2</sup> No input signal, $V_{STBY} = GND$		10	1000	nA
$V_{OO}$	Output Offset Voltage No input signal, $R_L = 8\Omega$		3	25	mV
$P_o$	Output Power, $G=6dB$ THD = 1% Max, $f = 1kHz$ , $R_L = 4\Omega$ THD = 10% Max, $f = 1kHz$ , $R_L = 4\Omega$ THD = 1% Max, $f = 1kHz$ , $R_L = 8\Omega$ THD = 10% Max, $f = 1kHz$ , $R_L = 8\Omega$		0.75 1 0.5 0.6		W
THD + N	Total Harmonic Distortion + Noise $P_o = 350 mW_{RMS}$ , $G = 6dB$ , $20Hz < f < 20kHz$ , $R_L = 8\Omega + 15\mu H$ , $BW < 30kHz$ $P_o = 350mW_{RMS}$ , $G = 6dB$ , $f = 1kHz$ , $R_L = 8\Omega + 15\mu H$ , $BW < 30kHz$		1 0.21		%
Efficiency	Efficiency $P_o = 0.7 W_{RMS}$ , $R_L = 4\Omega + \geq 15\mu H$ $P_o = 0.45 W_{RMS}$ , $R_L = 8\Omega + \geq 15\mu H$		78 88		%
PSRR	Power Supply Rejection Ratio with inputs grounded <sup>3</sup> $f = 217Hz$ , $R_L = 8\Omega$ , $G=6dB$ , $V_{ripple} = 200mV_{pp}$		60		dB
CMRR	Common Mode Rejection Ratio, $f = 217Hz$ , $R_L = 8\Omega$ , $G = 6dB$ , $\Delta V_{ic} = 200mV_{pp}$		54		dB
Gain	Gain value ( $R_{in}$ in $k\Omega$ )	$\frac{273k\Omega}{R_{in}}$	$\frac{300k\Omega}{R_{in}}$	$\frac{327k\Omega}{R_{in}}$	V/V
$R_{STDBY}$	Internal Resistance From Standby to GND	273	300	327	$k\Omega$
$F_{PWM}$	Pulse Width Modulator Base Frequency	180	250	320	kHz
SNR	Signal to Noise ratio (A Weighting), $P_o = 0.4W$ , $R_L = 8\Omega$		82		dB
$T_{WU}$	Wake-up time		5	10	ms
$T_{STB}$	Standby time		5	10	ms
$V_N$	Output Voltage Noise $f = 20Hz$ to $20kHz$ , $G = 6dB$ Unweighted $R_L = 4\Omega$ A weighted $R_L = 4\Omega$ Unweighted $R_L = 8\Omega$ A weighted $R_L = 8\Omega$ Unweighted $R_L = 4\Omega + 15\mu H$ A weighted $R_L = 4\Omega + 15\mu H$ Unweighted $R_L = 4\Omega + 30\mu H$ A weighted $R_L = 4\Omega + 30\mu H$ Unweighted $R_L = 8\Omega + 30\mu H$ A weighted $R_L = 8\Omega + 30\mu H$ Unweighted $R_L = 4\Omega + Filter$ A weighted $R_L = 4\Omega + Filter$ Unweighted $R_L = 4\Omega + Filter$ A weighted $R_L = 4\Omega + Filter$		83 57 83 61 81 58 87 62 77 56 85 63 80 57 85 61		$\mu V_{RMS}$

1) All electrical values are guaranteed with correlation measurements at 2.5V and 5V.

2) Standby mode is activated when  $V_{stdby}$  is tied to GND.

3) Dynamic measurements -  $20 \cdot \log(\text{rms}(V_{out})/\text{rms}(V_{ripple}))$ . Vripple is the surimposed sinus signal to  $V_{cc}$  @  $f = 217Hz$ .

Table 7.  $V_{CC} = +2.5V$ ,  $GND = 0V$ ,  $V_{ICM} = 1.25V$ ,  $T_{amb} = 25^{\circ}C$  (unless otherwise specified)

Symbol	Parameter	Min.	Typ.	Max.	Unit
$I_{CC}$	Supply Current No input signal, no load		1.7	2.4	mA
$I_{STANDBY}$	Standby Current <sup>1</sup> No input signal, $V_{STBY} = GND$		10	1000	nA
$V_{OO}$	Output Offset Voltage No input signal, $R_L = 8\Omega$		3	25	mV
$P_O$	Output Power, $G=6dB$ THD = 1% Max, $f = 1kHz$ , $R_L = 4\Omega$ THD = 10% Max, $f = 1kHz$ , $R_L = 4\Omega$ THD = 1% Max, $f = 1kHz$ , $R_L = 8\Omega$ THD = 10% Max, $f = 1kHz$ , $R_L = 8\Omega$		0.52 0.71 0.33 0.42		W
THD + N	Total Harmonic Distortion + Noise $P_o = 200\text{ mW}_{RMS}$ , $G = 6dB$ , $20Hz < f < 20kHz$ , $R_L = 8\Omega + 15\mu H$ , $BW < 30kHz$ $P_o = 200\text{ mW}_{RMS}$ , $G = 6dB$ , $f = 1kHz$ , $R_L = 8\Omega + 15\mu H$ , $BW < 30kHz$		1 0.19		%
Efficiency	Efficiency $P_o = 0.47\text{ W}_{RMS}$ , $R_L = 4\Omega + \geq 15\mu H$ $P_o = 0.3\text{ W}_{RMS}$ , $R_L = 8\Omega + \geq 15\mu H$		78 88		%
PSRR	Power Supply Rejection Ratio with inputs grounded <sup>2</sup> $f = 217Hz$ , $R_L = 8\Omega$ , $G=6dB$ , $V_{ripple} = 200\text{mV}_{pp}$		60		dB
CMRR	Common Mode Rejection Ratio $f = 217Hz$ , $R_L = 8\Omega$ , $G = 6dB$ , $\Delta V_{ic} = 200\text{mV}_{pp}$		54		dB
Gain	Gain value ( $R_{in}$ in $k\Omega$ )	$\frac{273k\Omega}{R_{in}}$	$\frac{300k\Omega}{R_{in}}$	$\frac{327k\Omega}{R_{in}}$	V/V
$R_{STDBY}$	Internal Resistance From Standby to GND	273	300	327	$k\Omega$
$F_{PWM}$	Pulse Width Modulator Base Frequency	180	250	320	kHz
SNR	Signal to Noise ratio (A Weighting), $P_o = 0.4W$ , $R_L = 8\Omega$		80		dB
$T_{WU}$	Wake-up time		5	10	ms
$T_{STB}$	Standby time		5	10	ms
$V_N$	Output Voltage Noise $f = 20Hz$ to $20kHz$ , $G = 6dB$ Unweighted $R_L = 4\Omega$ A weighted $R_L = 4\Omega$ Unweighted $R_L = 8\Omega$ A weighted $R_L = 8\Omega$ Unweighted $R_L = 4\Omega + 15\mu H$ A weighted $R_L = 4\Omega + 15\mu H$ Unweighted $R_L = 4\Omega + 30\mu H$ A weighted $R_L = 4\Omega + 30\mu H$ Unweighted $R_L = 8\Omega + 30\mu H$ A weighted $R_L = 8\Omega + 30\mu H$ Unweighted $R_L = 4\Omega + \text{Filter}$ A weighted $R_L = 4\Omega + \text{Filter}$ Unweighted $R_L = 4\Omega + \text{Filter}$ A weighted $R_L = 4\Omega + \text{Filter}$		85 60 86 62 76 56 82 60 67 53 78 57 74 54 78 59		$\mu V_{RMS}$

1) Standby mode is activated when  $V_{stdby}$  is tied to GND.

2) Dynamic measurements -  $20 \cdot \log(\text{rms}(V_{out})/\text{rms}(V_{ripple}))$ .  $V_{ripple}$  is the surimposed sinus signal to  $V_{cc}$  @  $f = 217Hz$ .

Table 8.  $V_{CC} = +2.4V^1$ ,  $GND = 0V$ ,  $V_{ICM} = 1.2V$ ,  $T_{amb} = 25^\circ C$  (unless otherwise specified)

Symbol	Parameter	Min.	Typ.	Max.	Unit
$I_{CC}$	Supply Current No input signal, no load		1.7		mA
$I_{STANDBY}$	Standby Current <sup>2</sup> No input signal, $V_{STBY} = GND$		10		nA
$V_{OO}$	Output Offset Voltage No input signal, $R_L = 8\Omega$		3		mV
$P_o$	Output Power, $G=6dB$ THD = 1% Max, $f = 1kHz$ , $R_L = 4\Omega$ THD = 10% Max, $f = 1kHz$ , $R_L = 4\Omega$ THD = 1% Max, $f = 1kHz$ , $R_L = 8\Omega$ THD = 10% Max, $f = 1kHz$ , $R_L = 8\Omega$		0.48 0.65 0.3 0.38		W
THD + N	Total Harmonic Distortion + Noise $P_o = 200 mW_{RMS}$ , $G = 6dB$ , $20Hz < f < 20kHz$ , $R_L = 8\Omega + 15\mu H$ , $BW < 30kHz$		1		%
Efficiency	Efficiency $P_o = 0.38 W_{RMS}$ , $R_L = 4\Omega + \geq 15\mu H$ $P_o = 0.25 W_{RMS}$ , $R_L = 8\Omega + \geq 15\mu H$		77 86		%
CMRR	Common Mode Rejection Ratio $f = 217Hz$ , $R_L = 8\Omega$ , $G = 6dB$ , $\Delta V_{ic} = 200mV_{pp}$		54		dB
Gain	Gain value ( $R_{in}$ in $k\Omega$ )	$\frac{273k\Omega}{R_{in}}$	$\frac{300k\Omega}{R_{in}}$	$\frac{327k\Omega}{R_{in}}$	V/V
$R_{STDBY}$	Internal Resistance From Standby to GND	273	300	327	$k\Omega$
$F_{PWM}$	Pulse Width Modulator Base Frequency		250		kHz
SNR	Signal to Noise ratio (A Weighting), $P_o = 0.25W$ , $R_L = 8\Omega$		80		dB
$T_{WU}$	Wake-up time		5		ms
$T_{STB}$	Standby time		5		ms
$V_N$	Output Voltage Noise $f = 20Hz$ to $20kHz$ , $G = 6dB$ Unweighted $R_L = 4\Omega$ A weighted $R_L = 4\Omega$ Unweighted $R_L = 8\Omega$ A weighted $R_L = 8\Omega$ Unweighted $R_L = 4\Omega + 15\mu H$ A weighted $R_L = 4\Omega + 15\mu H$ Unweighted $R_L = 4\Omega + 30\mu H$ A weighted $R_L = 4\Omega + 30\mu H$ Unweighted $R_L = 8\Omega + 30\mu H$ A weighted $R_L = 8\Omega + 30\mu H$ Unweighted $R_L = 4\Omega + Filter$ A weighted $R_L = 4\Omega + Filter$ Unweighted $R_L = 4\Omega + Filter$ A weighted $R_L = 4\Omega + Filter$		85 60 86 62 76 56 82 60 67 53 78 57 74 54 78 59		$\mu V_{RMS}$

1) Parameters guaranteed by evaluation and design, not by test.

2) Standby mode is activated when  $V_{stdby}$  is tied to GND.

Note: In the graphs that follow, the following abbreviations are used:

$RL + 15\mu H$  or  $30\mu H$  = pure resistor + very low series resistance inductor

Filter = LC output filter ( $1\mu F + 30\mu H$  for  $4\Omega$  and  $0.5\mu F + 60\mu H$  for  $8\Omega$ )

All measurements done with  $Cs1 = 1\mu F$  and  $Cs2 = 100nF$  except for PSRR where  $Cs1$  is removed

Figure 2. Test diagram for measurements

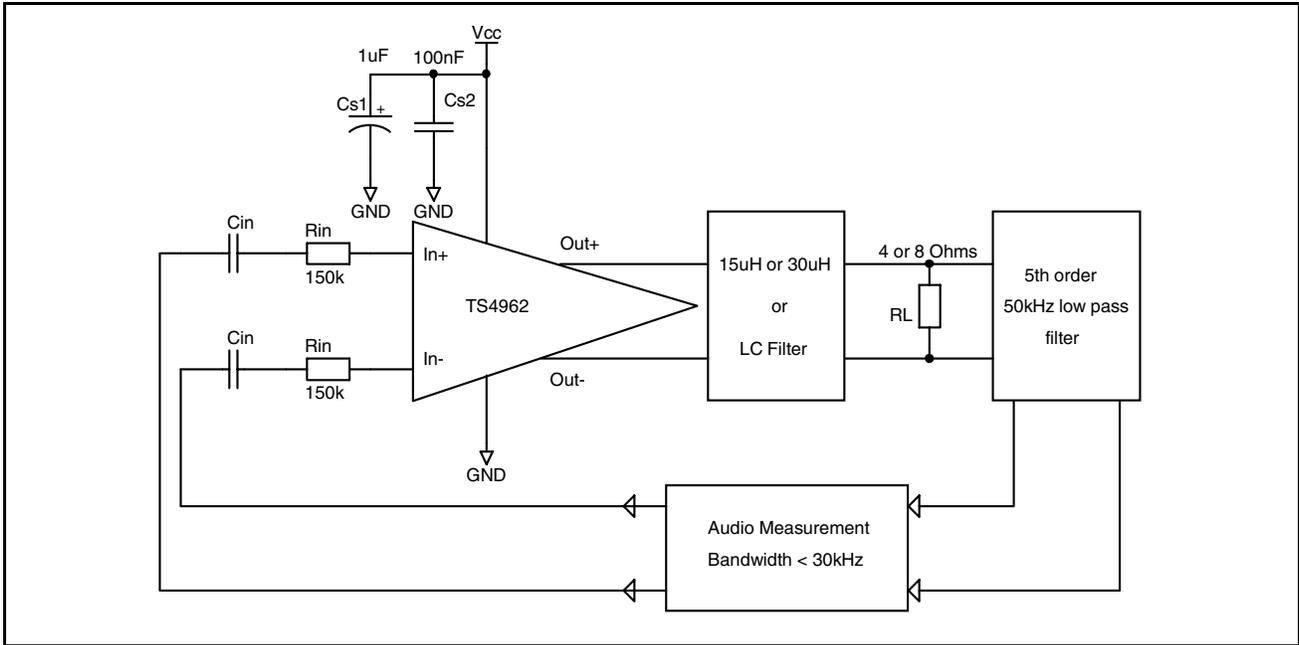


Figure 3. Test diagram for PSRR measurements

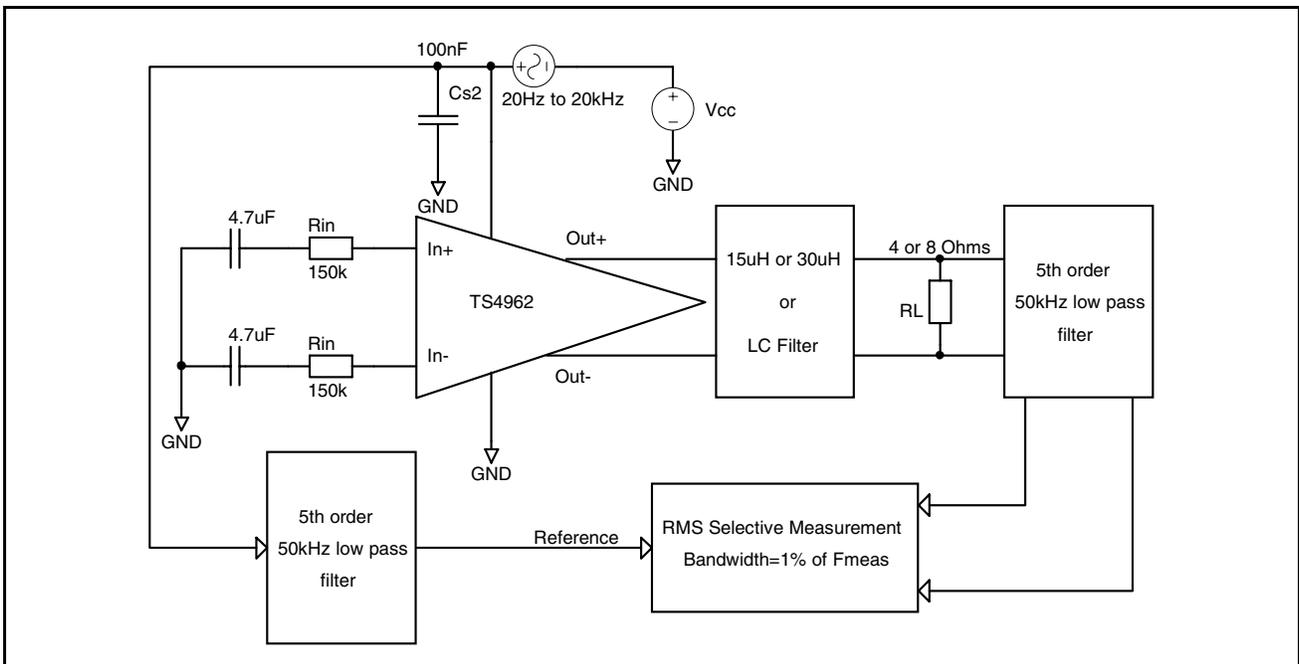


Figure 4. Current consumption vs power supply voltage

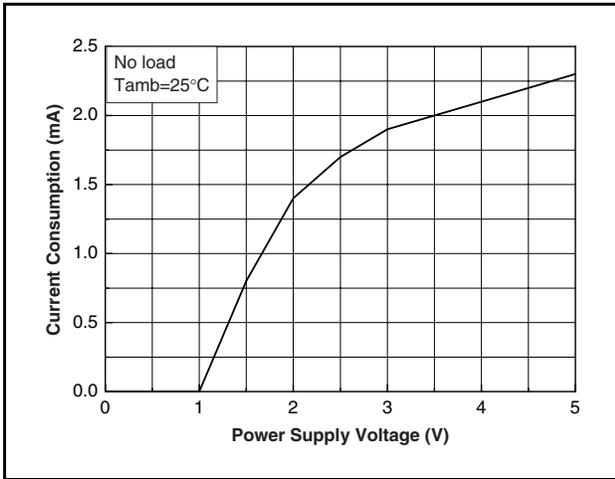


Figure 7. Output offset voltage vs common mode input voltage

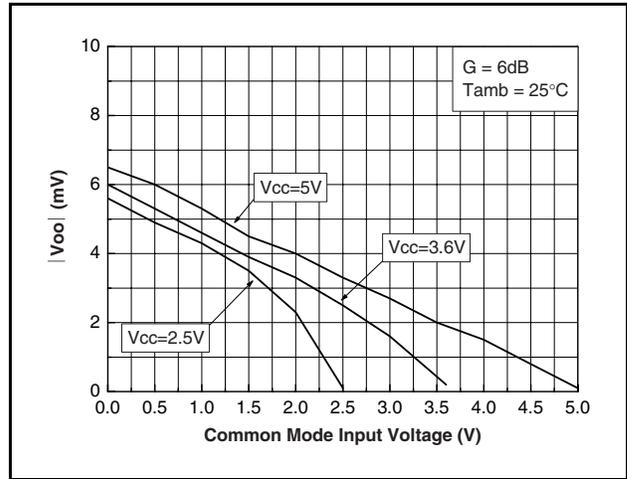


Figure 5. Current consumption vs standby voltage

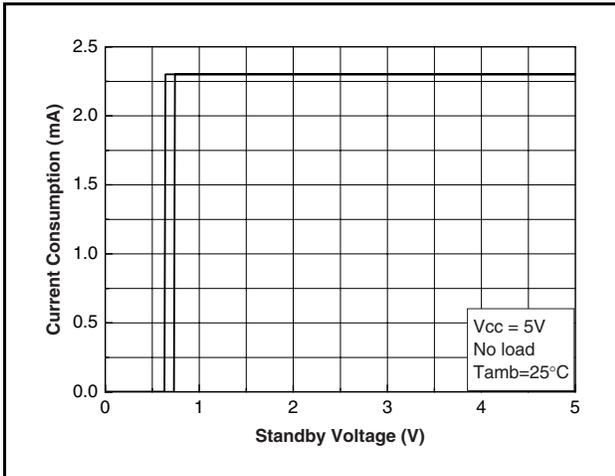


Figure 8. Efficiency vs output power

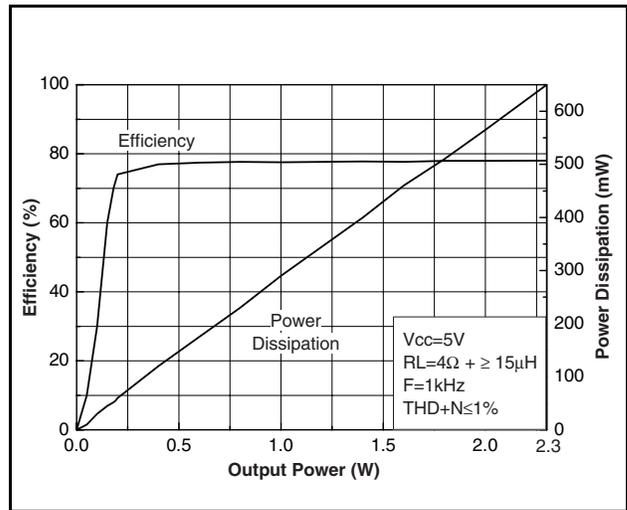


Figure 6. Current consumption vs standby voltage

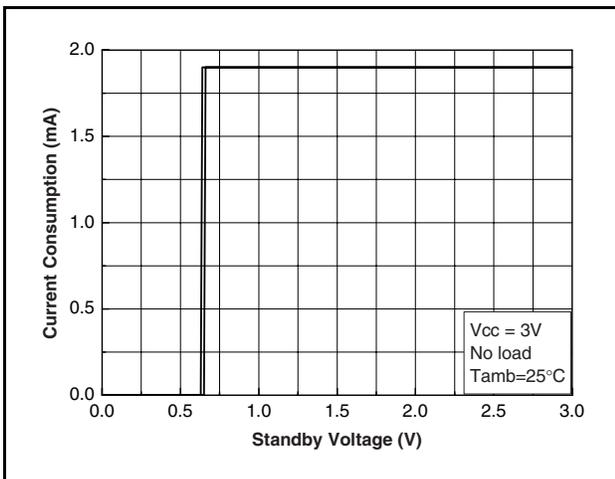


Figure 9. Efficiency vs output power

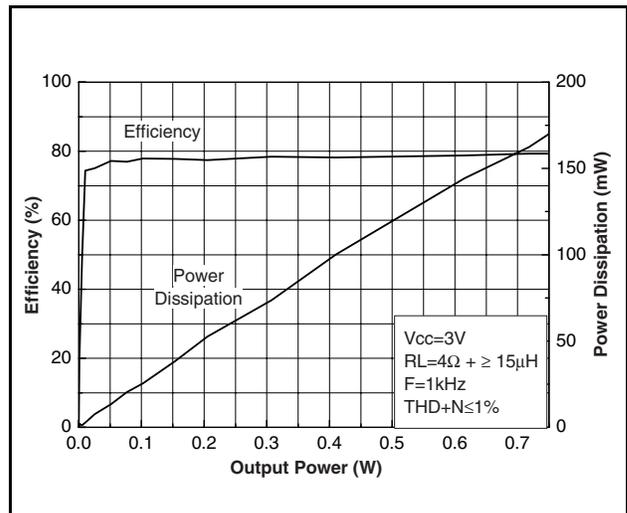


Figure 10. Efficiency vs output power

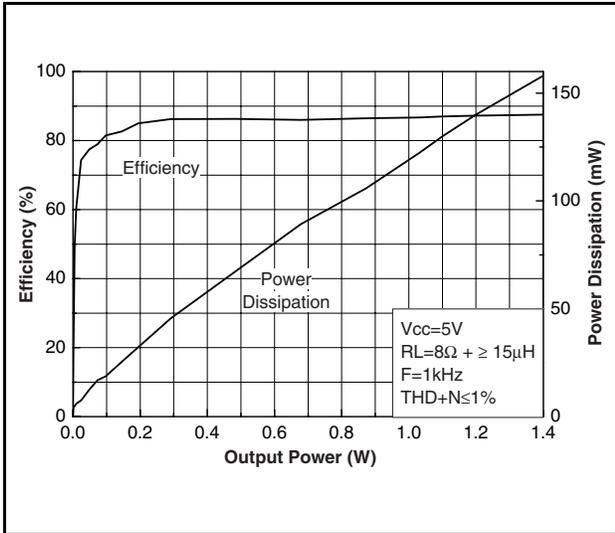


Figure 13. Output power vs power supply voltage

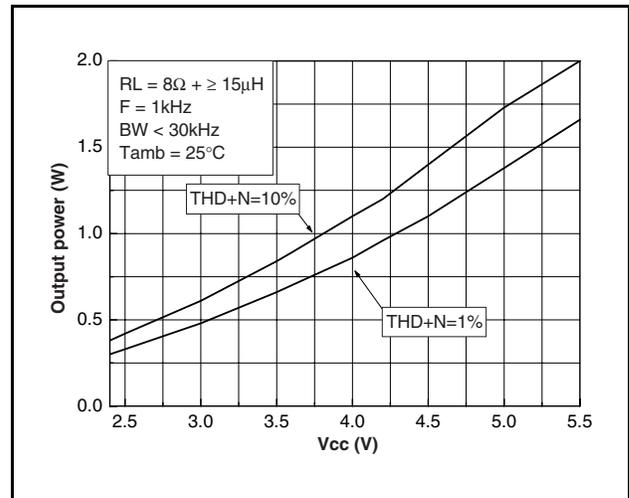


Figure 11. Efficiency vs output power

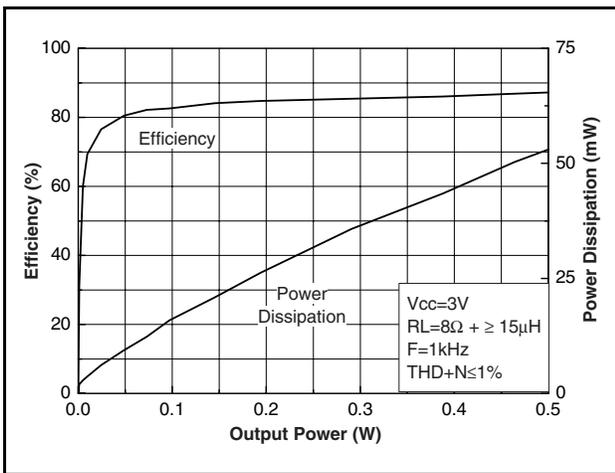


Figure 14. PSRR vs frequency

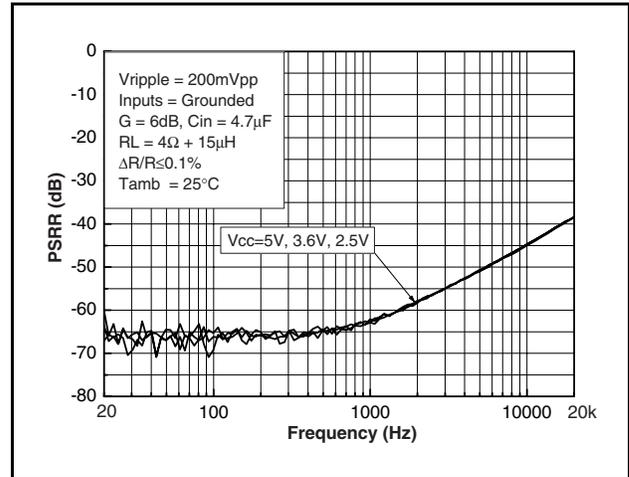


Figure 12. Output power vs power supply voltage

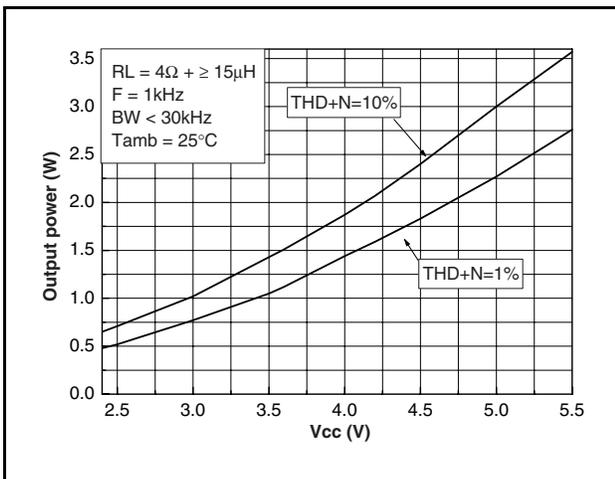


Figure 15. PSRR vs frequency

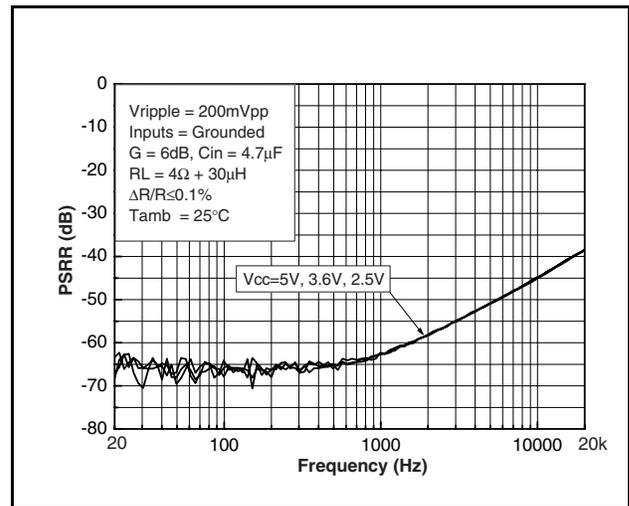


Figure 16. PSRR vs frequency

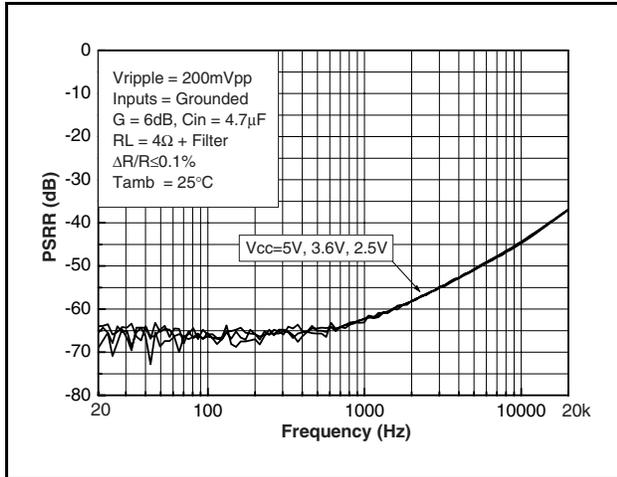


Figure 19. PSRR vs frequency

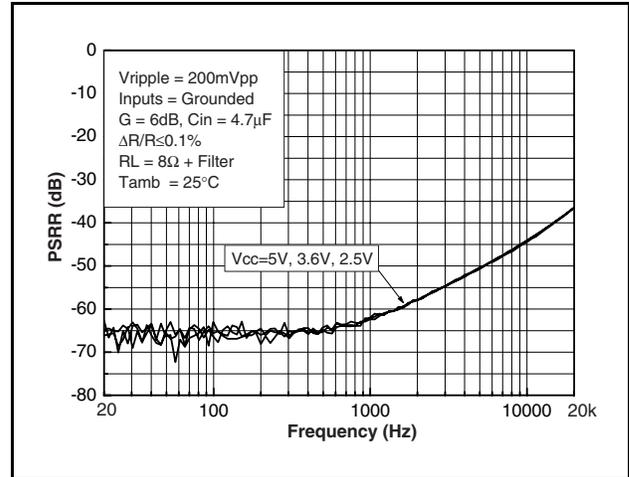


Figure 17. PSRR vs frequency

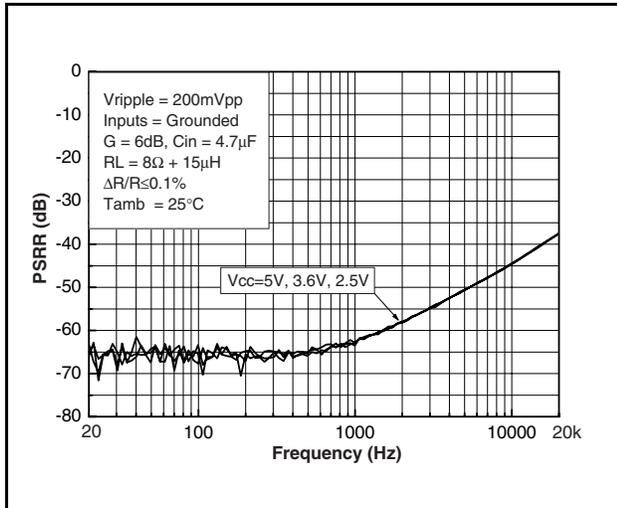


Figure 20. PSRR vs frequency Common Mode Input Voltage

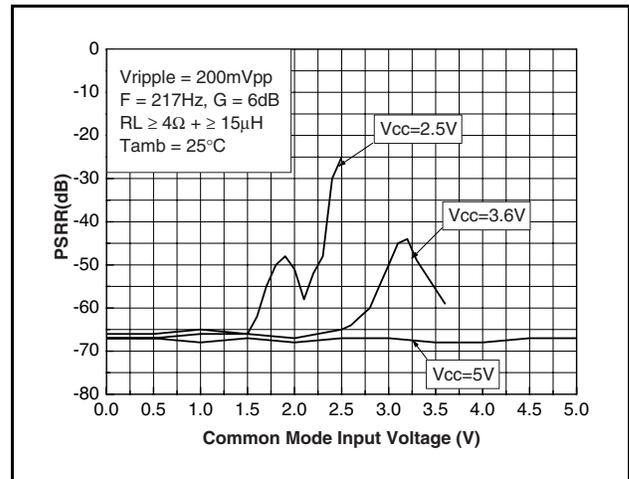


Figure 18. PSRR vs frequency

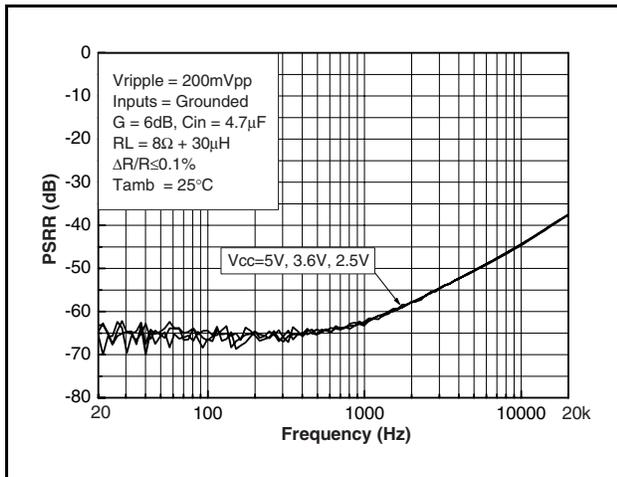


Figure 21. CMRR vs frequency

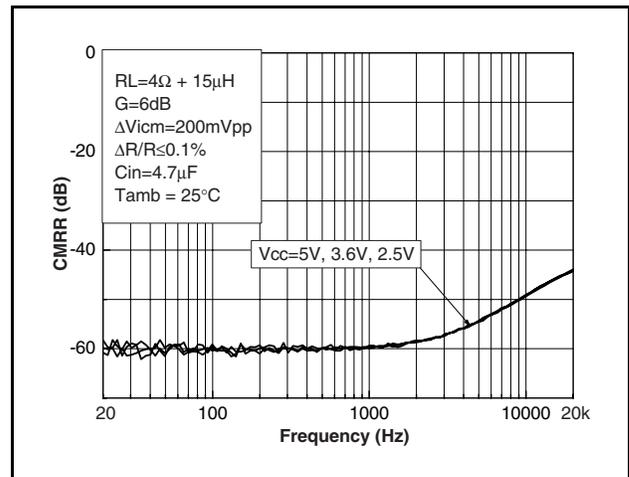


Figure 22. CMRR vs frequency

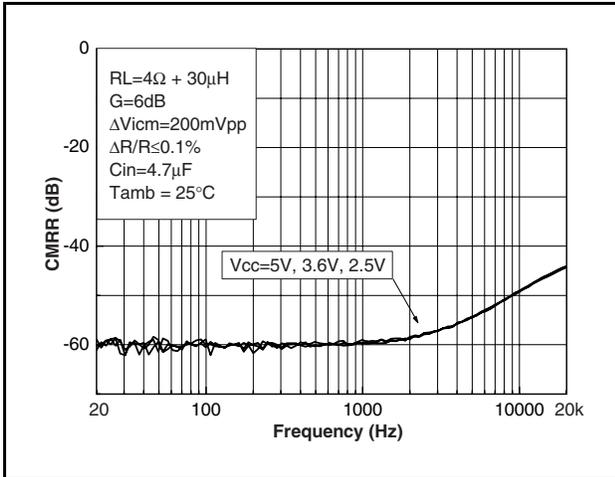


Figure 25. CMRR vs frequency

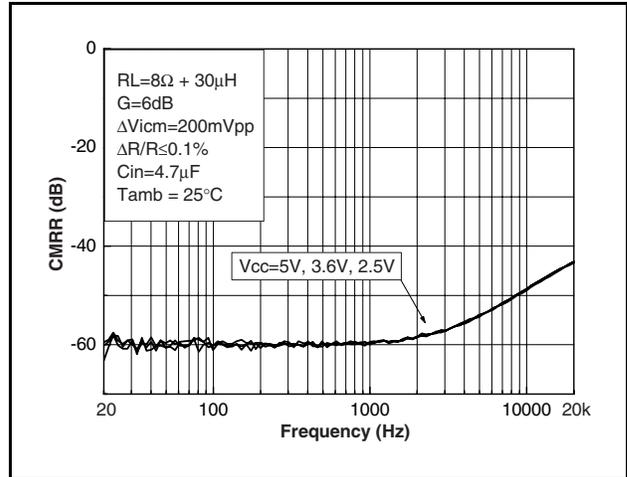


Figure 23. CMRR vs frequency

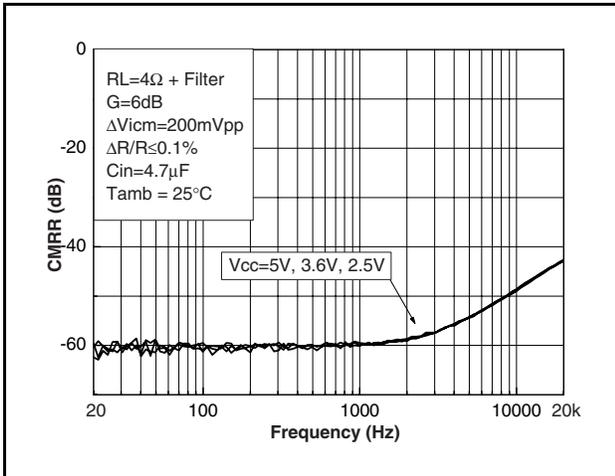


Figure 26. CMRR vs frequency

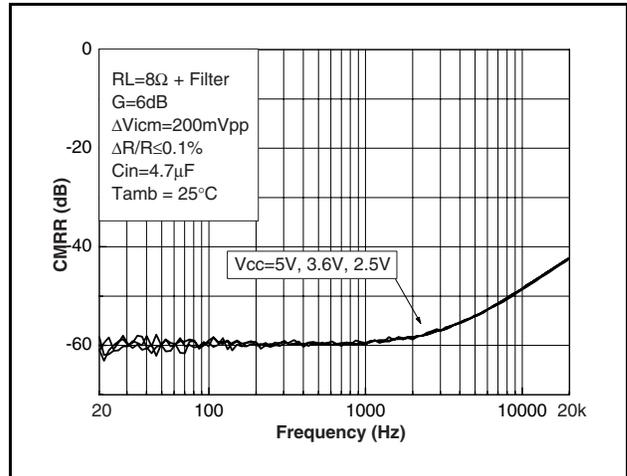


Figure 24. CMRR vs frequency

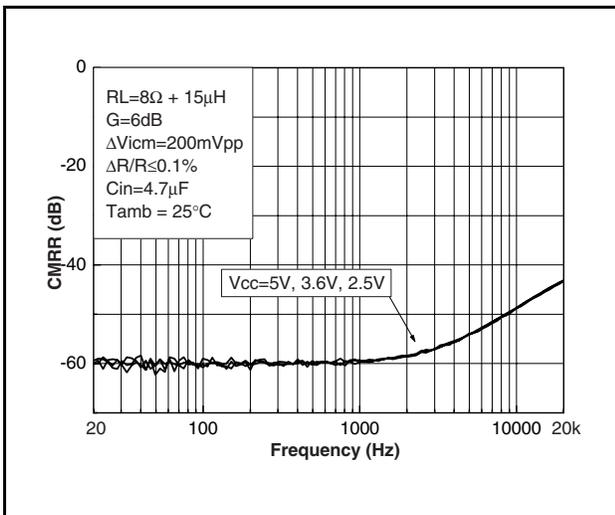


Figure 27. CMRR vs frequency Common Mode Input Voltage

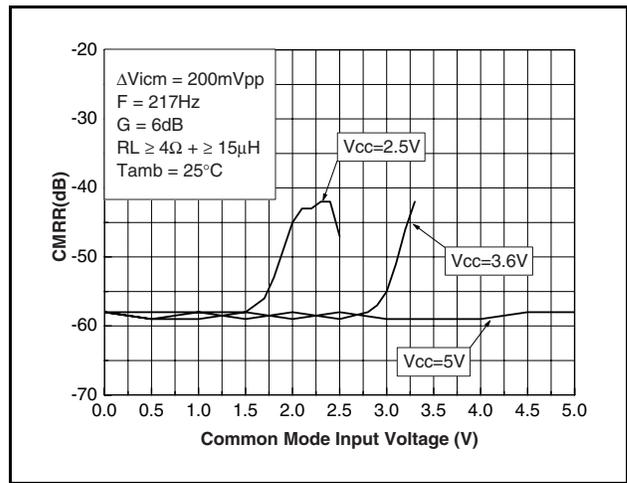


Figure 28. THD+N vs output power

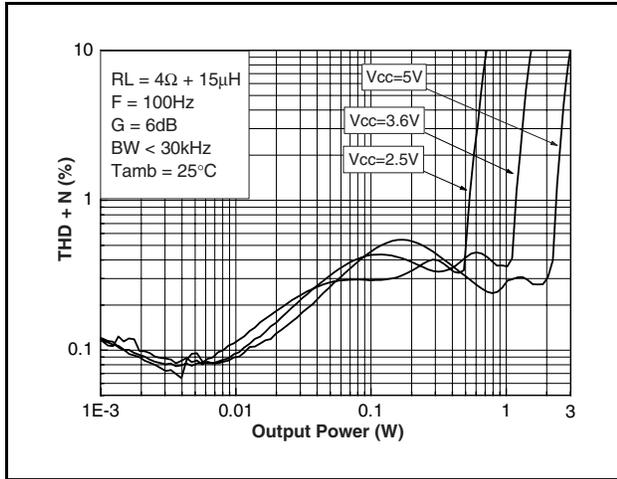


Figure 31. THD+N vs output power

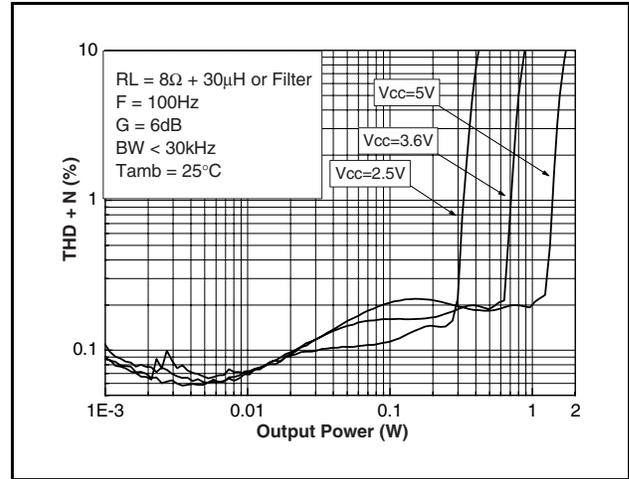


Figure 29. THD+N vs output power

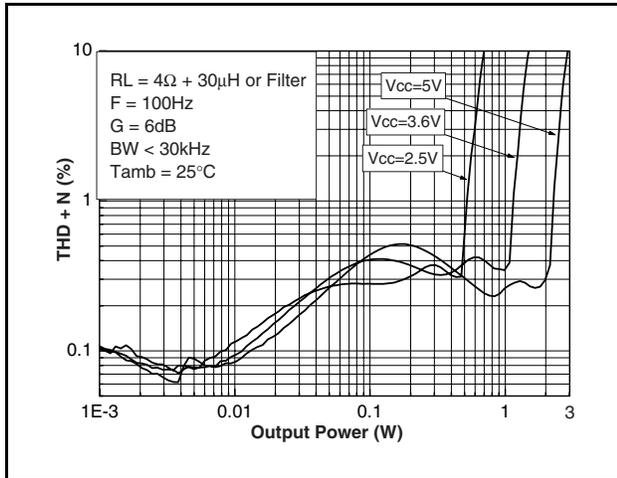


Figure 32. THD+N vs output power

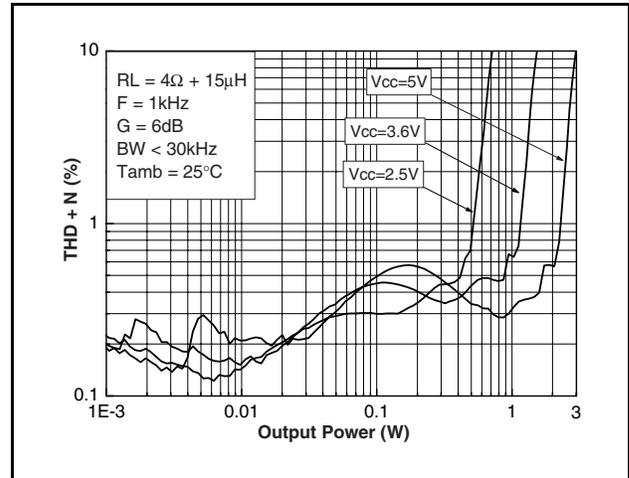


Figure 30. THD+N vs output power

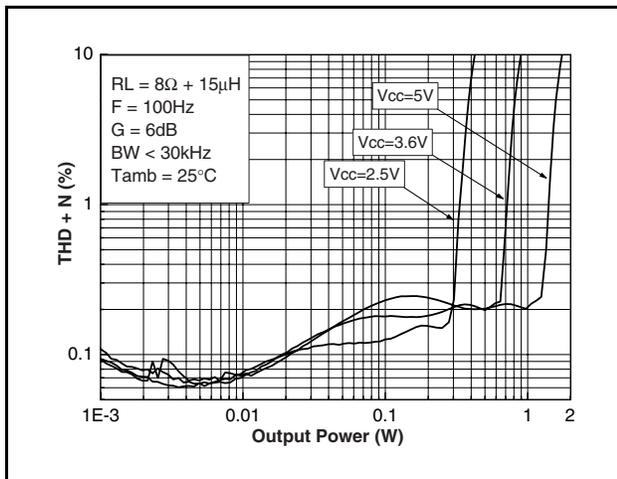


Figure 33. THD+N vs output power

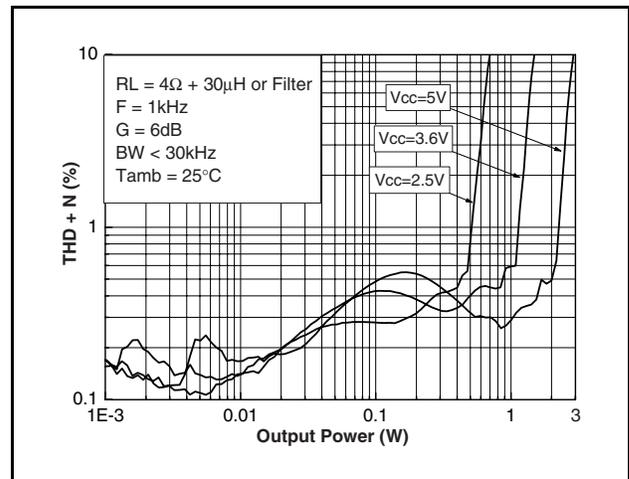


Figure 34. THD+N vs output power

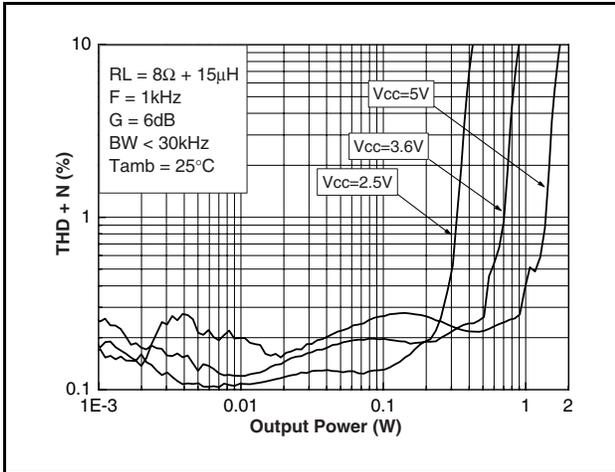


Figure 37. THD+N vs frequency

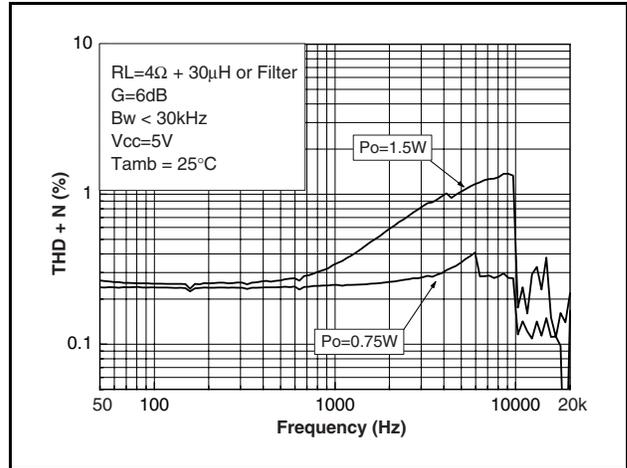


Figure 35. THD+N vs output power

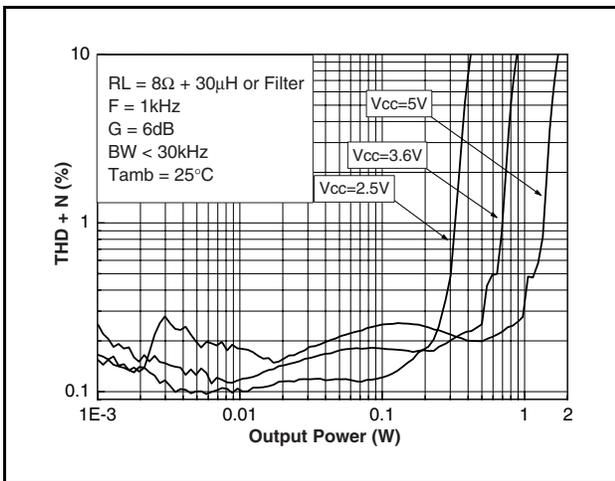


Figure 38. THD+N vs frequency

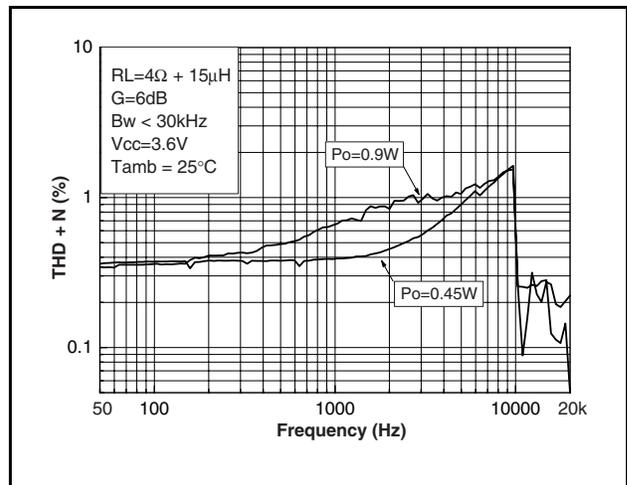


Figure 36. THD+N vs frequency

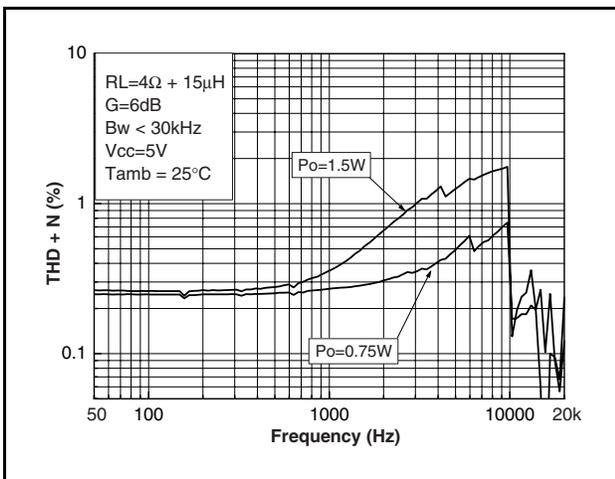


Figure 39. THD+N vs frequency

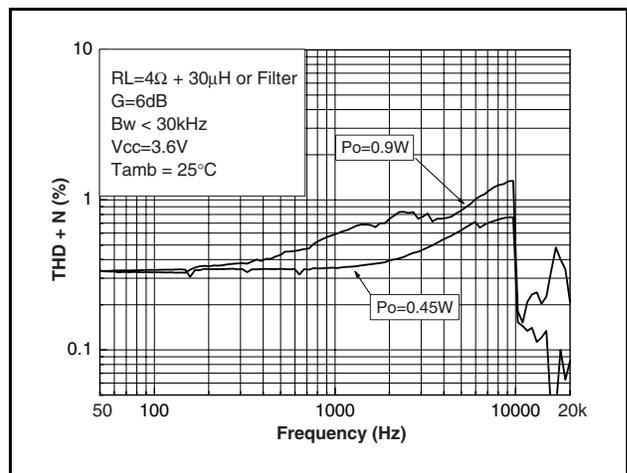


Figure 40. THD+N vs frequency

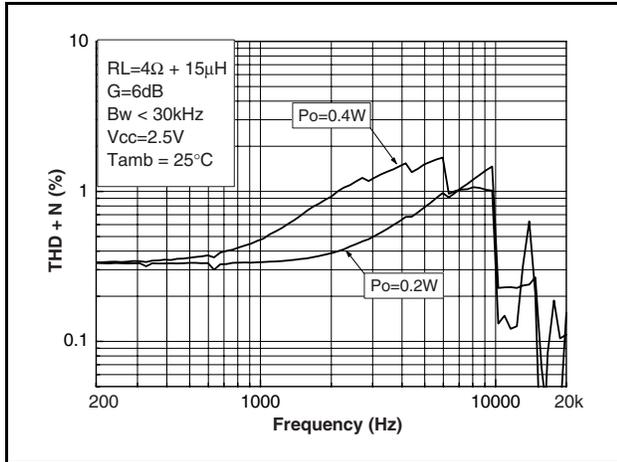


Figure 43. THD+N vs frequency

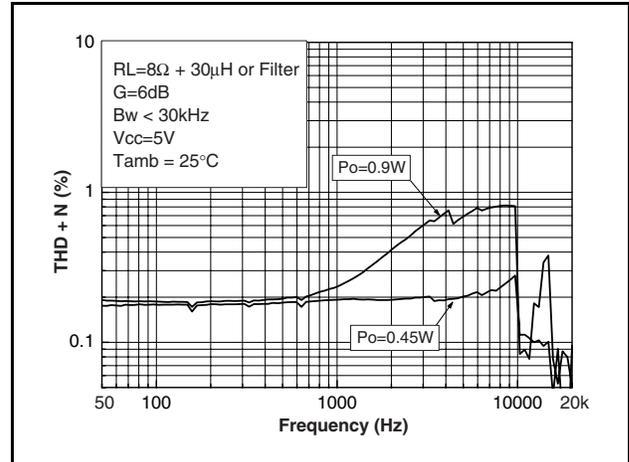


Figure 41. THD+N vs frequency

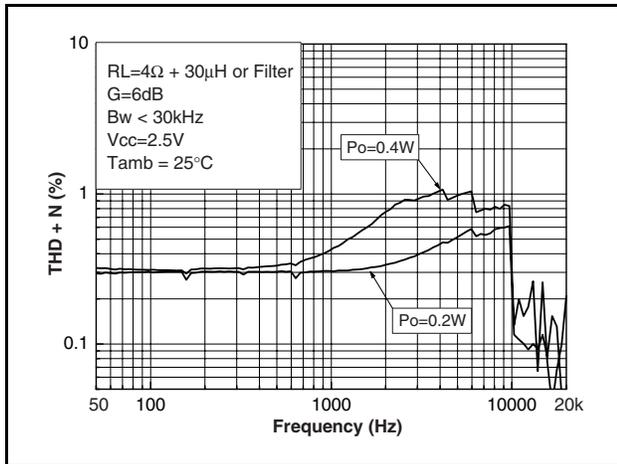


Figure 44. THD+N vs frequency

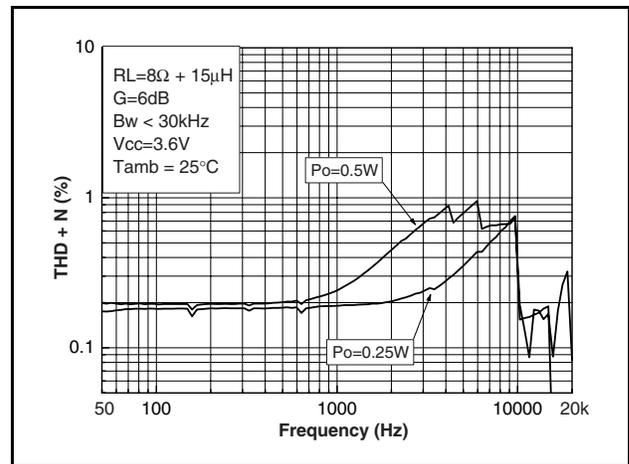


Figure 42. THD+N vs frequency

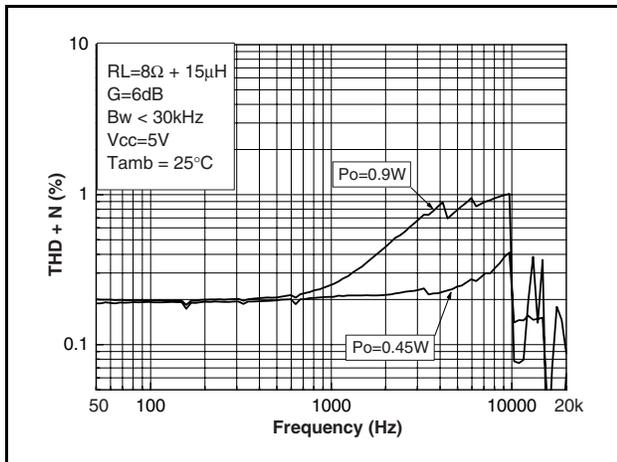


Figure 45. THD+N vs frequency

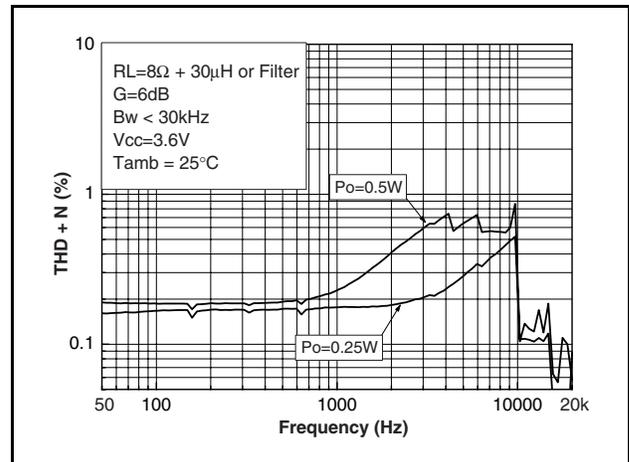


Figure 46. THD+N vs frequency

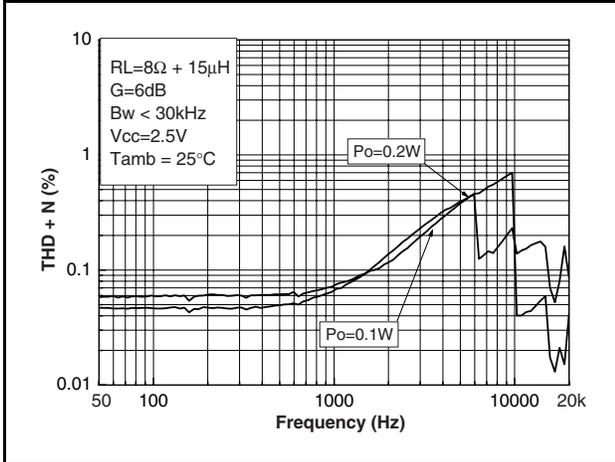


Figure 49. Gain vs frequency

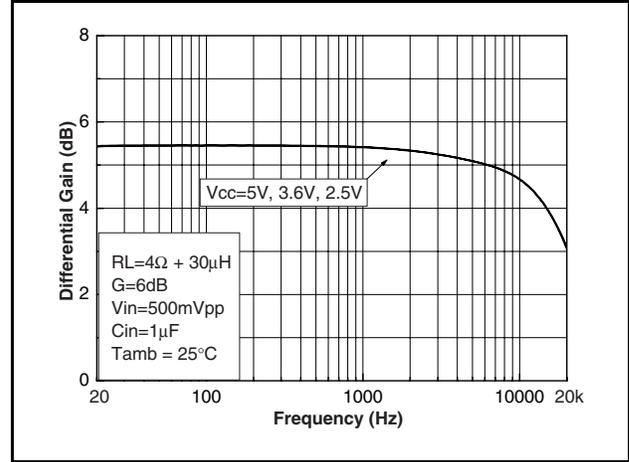


Figure 47. THD+N vs frequency

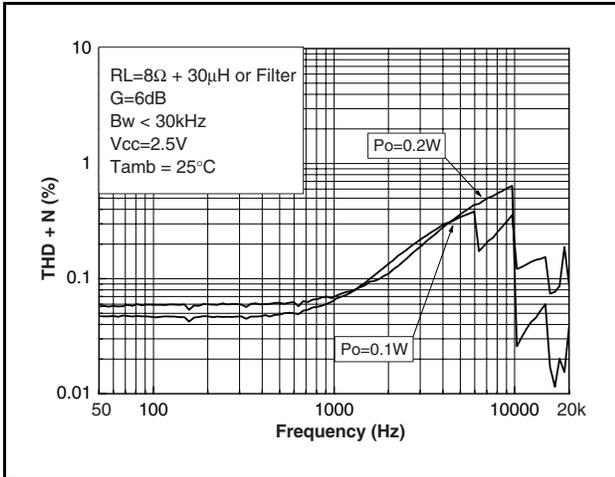


Figure 50. Gain vs frequency

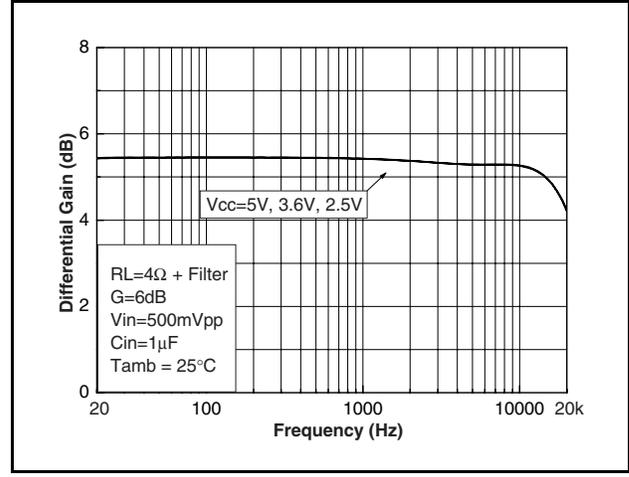


Figure 48. Gain vs frequency

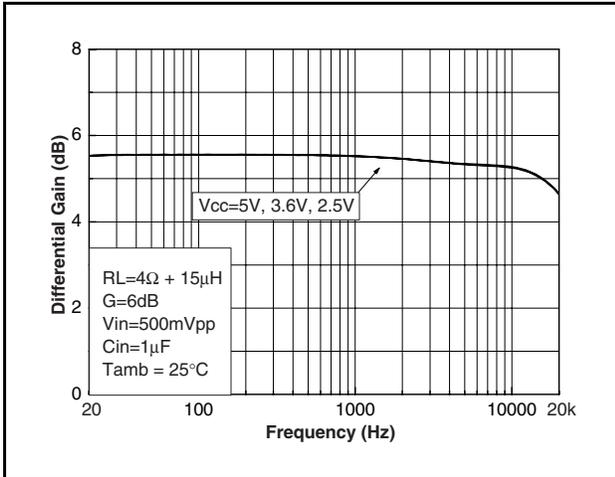


Figure 51. Gain vs frequency

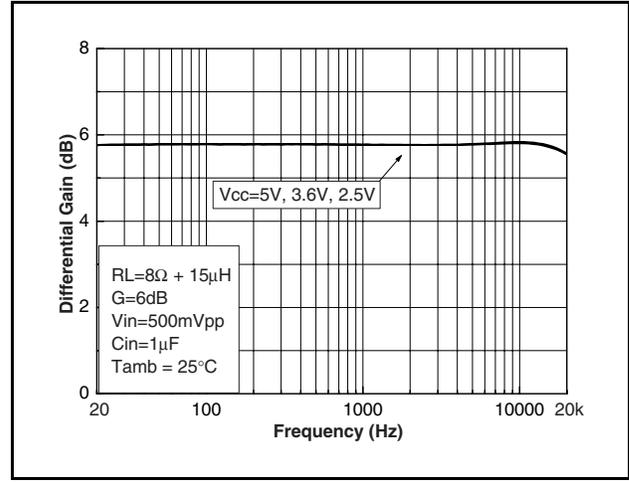


Figure 52. Gain vs frequency

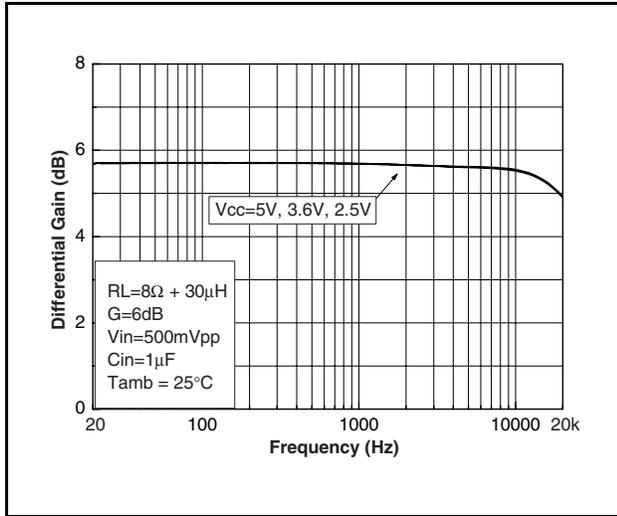


Figure 53. Gain vs frequency

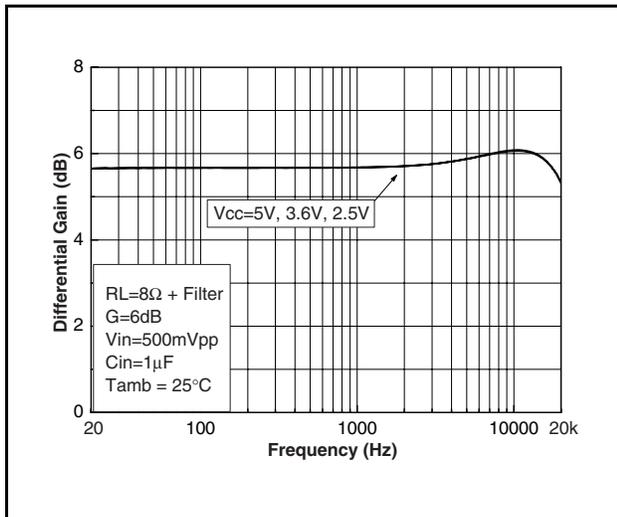


Figure 54. Gain vs frequency

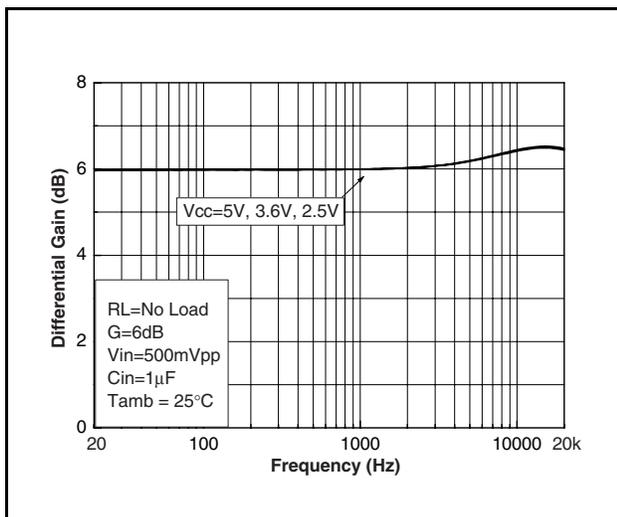


Figure 55. Startup & shutdown time  
Vcc=5V, G=6dB, CIN=1μF (5ms/div)

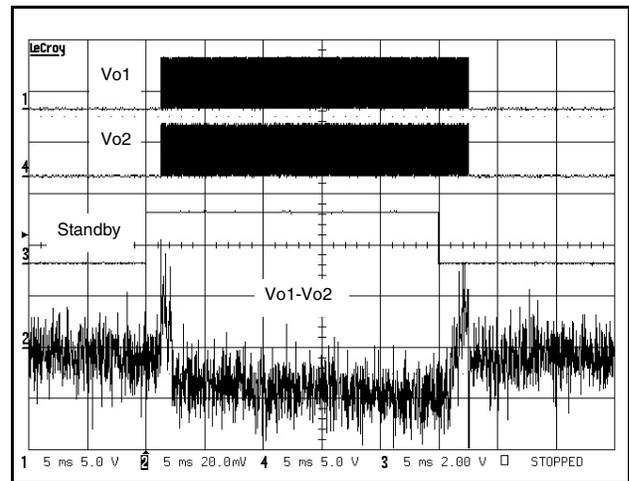


Figure 56. Startup & shutdown time  
Vcc=3V, G=6dB, CIN=1μF (5ms/div)



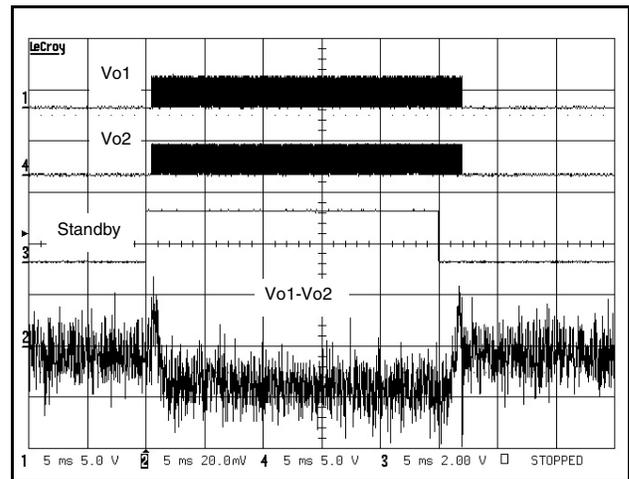



Figure 57. Startup & shutdown time  
Vcc=5V, G=6dB, CIN=100nF (5ms/div)

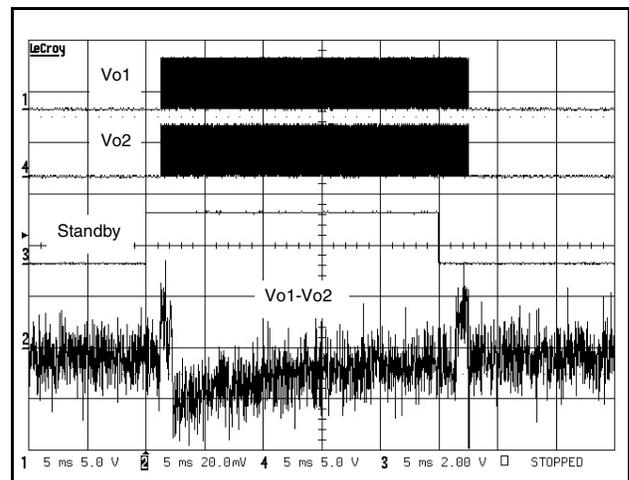


**Figure 58. Startup & shutdown time**  
 $V_{CC}=3V, G=6dB, C_{IN}=100nF$  (5ms/div)

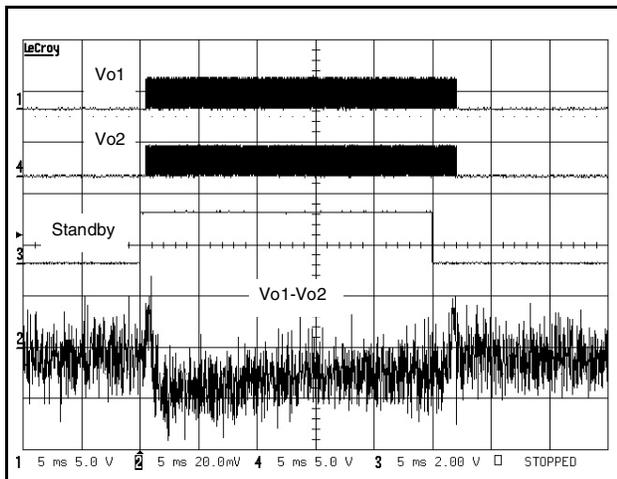

**Figure 59. Startup & shutdown time**  
 $V_{CC}=5V, G=6dB, NoC_{IN}$  (5ms/div)

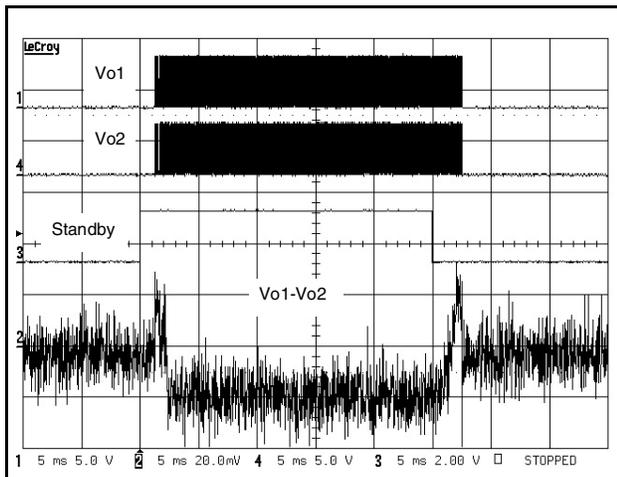

**Figure 60. Startup & shutdown time**  
 $V_{CC}=3V, G=6dB, NoC_{IN}$  (5ms/div)

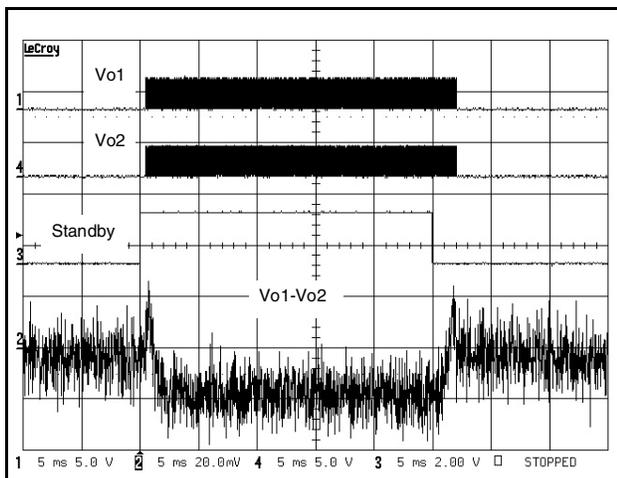

## 4 Package Mechanical Data

### 4.1 Pin-out and markings for 9-bump flip-chip

Figure 61. Pin-out for 9-bump flip-chip (top view)



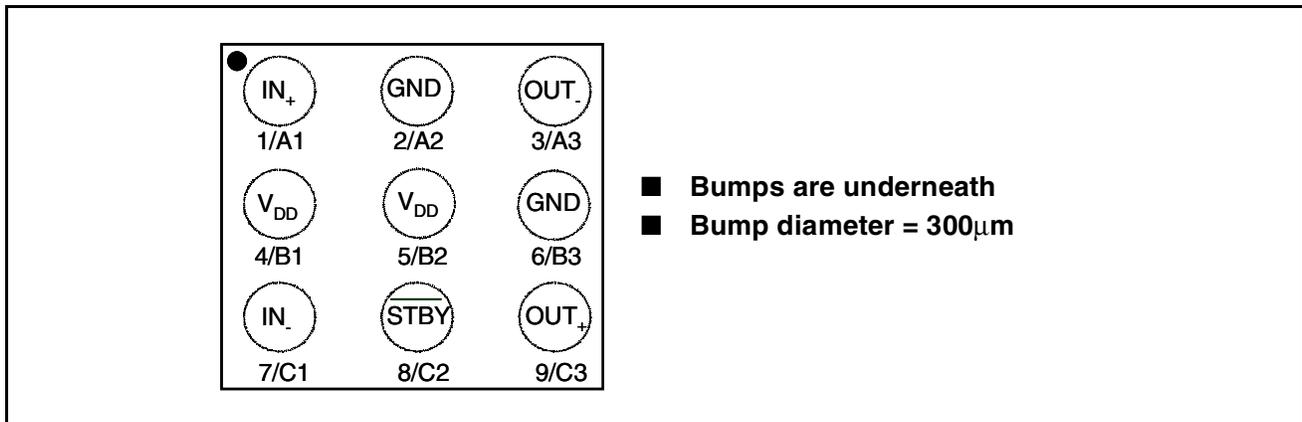


Figure 62. Marking for 9-bump flip-chip (top view)

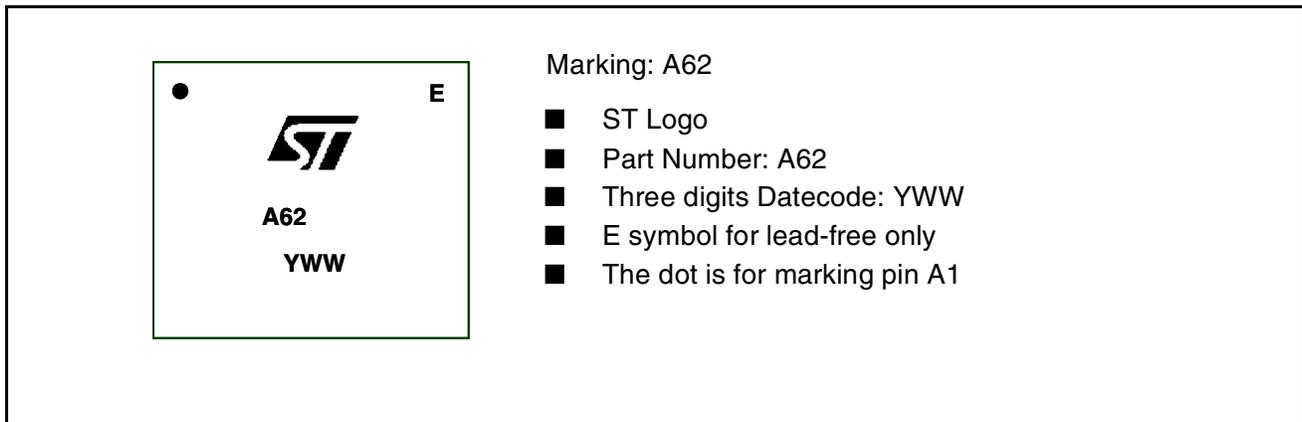

### 4.2 Mechanical data for 9-bump flip-chip

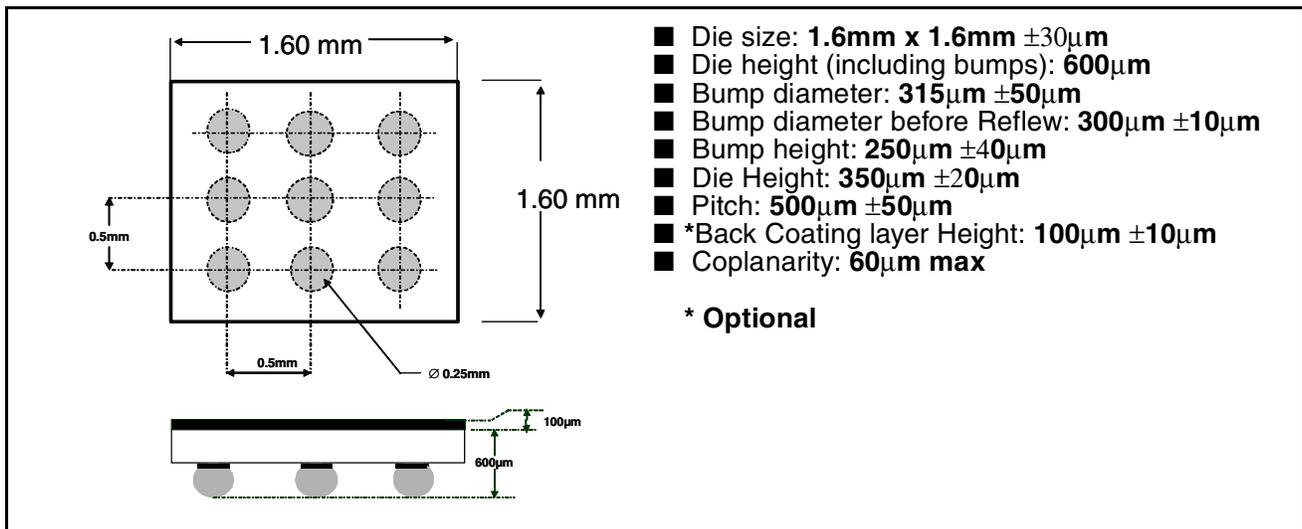

## 5 Revision History

Date	Revision	Description of Changes
01 Sept. 2004	0.1	First release corresponding to Target Specification version of datasheet.
01 Oct. 2004	0.2	Update Gain Values.
01 Nov. 2004	1	First published version corresponding to Preliminary Data version of datasheet. Specific content changes as follows: <ul style="list-style-type: none"><li>• update Electrical Values + curves.</li></ul>
01 Jan. 2005	2	Technical parameter updated (Output Power at 3W).

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics  
All other names are the property of their respective owners

© 2005 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)