THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.-- -.-
© COPYRIGHT - - By -- ALL RIGHTS RESERVED

LOC	DIST
AD	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A1	REVISED PER ECO-11-004820	11MAR11	RK	HMR

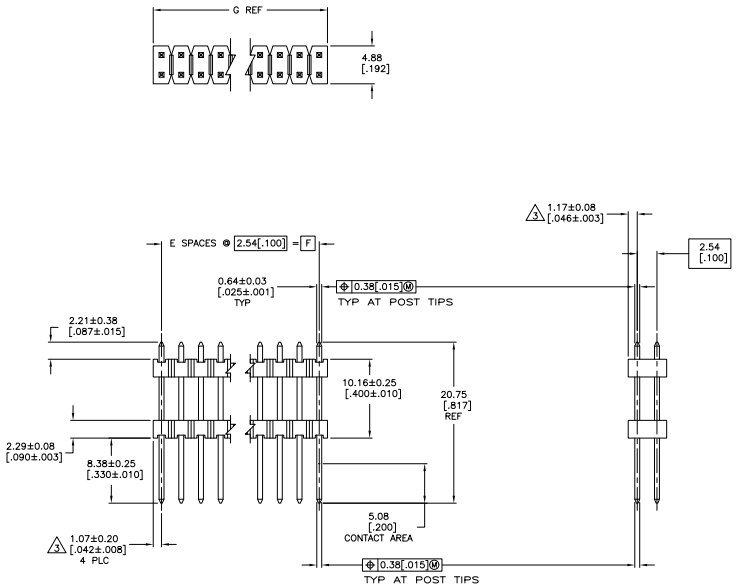

1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
3. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
4. HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
5. FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA, 0.00254–0.00508 [.000100–.000200] MATTE TIN–LEAD ON SOLDER TAIL, 0.00127 [.000050] NICKEL ENTIRE POST.
6. FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA, 0.00254–0.00508 [.000100–.000200] MATTE TIN ON SOLDER TAIL, 0.00127 [.000050] NICKEL ENTIRE POST.



RECOMMENDED HOLE LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCE UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± 0.8[.03]
2 PLC ± 0.13[.005]
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL 4

FINISH SEE TABLE

DRN R. BROWN 19OCT2006
CHK J. GESFORD 19OCT2006
APVD J. GESFORD 19OCT2006
PRODUCT SPEC –
APPLICATION SPEC –
WEIGHT –

TE Connectivity

NAME HEADER ASSEMBLY, MOD II, STACKING, DOUBLE ROW, .025 SQ.POST, UNSHROUDED

SIZE A1 CAGE CODE 00779 DRAWING NO C-146492 RESTRICTED TO –

CUSTOMER DRAWING SCALE 4:1 SHEET 1 OF 2 REV A1

4MOS (3/11)

Downloaded from Elcodis.com electronic components distributor

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.-.-
© COPYRIGHT - - By - - ALL RIGHTS RESERVED

LOC	DIST
AD	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	–	SEE SHEET 1	–	–	–

6	101.19 [3.984]	99.06 [3.900]	39	80	9–146492–0
6	98.65 [3.884]	96.52 [3.800]	38	78	8–146492–9
6	96.11 [3.784]	93.98 [3.700]	37	76	8–146492–8
6	93.57 [3.684]	91.44 [3.600]	36	74	8–146492–7
6	91.03 [3.584]	88.90 [3.500]	35	72	8–146492–6
6	88.49 [3.484]	86.36 [3.400]	34	70	8–146492–5
6	85.95 [3.384]	83.82 [3.300]	33	68	8–146492–4
6	83.41 [3.284]	81.28 [3.200]	32	66	8–146492–3
6	80.87 [3.184]	78.74 [3.100]	31	64	8–146492–2
6	78.33 [3.084]	76.20 [3.000]	30	62	8–146492–1
6	75.79 [2.984]	73.66 [2.900]	29	60	8–146492–0
6	73.25 [2.884]	71.12 [2.800]	28	58	7–146492–9
6	70.71 [2.784]	68.58 [2.700]	27	56	7–146492–8
6	68.17 [2.684]	66.04 [2.600]	26	54	7–146492–7
6	65.63 [2.584]	63.50 [2.500]	25	52	7–146492–6
6	63.09 [2.484]	60.96 [2.400]	24	50	7–146492–5
6	60.55 [2.384]	58.42 [2.300]	23	48	7–146492–4
6	58.01 [2.284]	55.88 [2.200]	22	46	7–146492–3
6	55.47 [2.184]	53.34 [2.100]	21	44	7–146492–2
6	52.93 [2.084]	50.80 [2.000]	20	42	7–146492–1
6	50.39 [1.984]	48.26 [1.900]	19	40	7–146492–0
6	47.85 [1.884]	45.72 [1.800]	18	38	6–146492–9
6	45.31 [1.784]	43.18 [1.700]	17	36	6–146492–8
6	42.77 [1.684]	40.64 [1.600]	16	34	6–146492–7
6	40.23 [1.584]	38.10 [1.500]	15	32	6–146492–6
6	37.69 [1.484]	35.56 [1.400]	14	30	6–146492–5
6	35.15 [1.384]	33.02 [1.300]	13	28	6–146492–4
6	32.61 [1.284]	30.48 [1.200]	12	26	6–146492–3
6	30.07 [1.184]	27.94 [1.100]	11	24	6–146492–2
6	27.53 [1.084]	25.40 [1.000]	10	22	6–146492–1
6	24.99 [.984]	22.86 [.900]	9	20	6–146492–0
6	22.45 [.884]	20.32 [.800]	8	18	5–146492–9
6	19.91 [.784]	17.78 [.700]	7	16	5–146492–8
6	17.37 [.684]	15.24 [.600]	6	14	5–146492–7
6	14.83 [.584]	12.70 [.500]	5	12	5–146492–6
6	12.29 [.484]	10.16 [.400]	4	10	5–146492–5
6	9.75 [.384]	7.62 [.300]	3	8	5–146492–4
6	7.21 [.284]	5.08 [.200]	2	6	5–146492–3
6	4.67 [.184]	2.54 [.100]	1	4	5–146492–2
6	2.13 [.084]	– –	–	2	5–146492–1
PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

5	101.19 [3.984]	99.06 [3.900]	39	80	4–146492–0
5	98.65 [3.884]	96.52 [3.800]	38	78	3–146492–9
5	96.11 [3.784]	93.98 [3.700]	37	76	3–146492–8
5	93.57 [3.684]	91.44 [3.600]	36	74	3–146492–7
5	91.03 [3.584]	88.90 [3.500]	35	72	3–146492–6
5	88.49 [3.484]	86.36 [3.400]	34	70	3–146492–5
5	85.95 [3.384]	83.82 [3.300]	33	68	3–146492–4
5	83.41 [3.284]	81.28 [3.200]	32	66	3–146492–3
5	80.87 [3.184]	78.74 [3.100]	31	64	3–146492–2
5	78.33 [3.084]	76.20 [3.000]	30	62	3–146492–1
5	75.79 [2.984]	73.66 [2.900]	29	60	3–146492–0
5	73.25 [2.884]	71.12 [2.800]	28	58	2–146492–9
5	70.71 [2.784]	68.58 [2.700]	27	56	2–146492–8
5	68.17 [2.684]	66.04 [2.600]	26	54	2–146492–7
5	65.63 [2.584]	63.50 [2.500]	25	52	2–146492–6
5	63.09 [2.484]	60.96 [2.400]	24	50	2–146492–5
5	60.55 [2.384]	58.42 [2.300]	23	48	2–146492–4
5	58.01 [2.284]	55.88 [2.200]	22	46	2–146492–3
5	55.47 [2.184]	53.34 [2.100]	21	44	2–146492–2
5	52.93 [2.084]	50.80 [2.000]	20	42	2–146492–1
5	50.39 [1.984]	48.26 [1.900]	19	40	2–146492–0
5	47.85 [1.884]	45.72 [1.800]	18	38	1–146492–9
5	45.31 [1.784]	43.18 [1.700]	17	36	1–146492–8
5	42.77 [1.684]	40.64 [1.600]	16	34	1–146492–7
5	40.23 [1.584]	38.10 [1.500]	15	32	1–146492–6
5	37.69 [1.484]	35.56 [1.400]	14	30	1–146492–5
5	35.15 [1.384]	33.02 [1.300]	13	28	1–146492–4
5	32.61 [1.284]	30.48 [1.200]	12	26	1–146492–3
5	30.07 [1.184]	27.94 [1.100]	11	24	1–146492–2
5	27.53 [1.084]	25.40 [1.000]	10	22	1–146492–1
5	24.99 [.984]	22.86 [.900]	9	20	1–146492–0
5	22.45 [.884]	20.32 [.800]	8	18	146492–9
5	19.91 [.784]	17.78 [.700]	7	16	146492–8
5	17.37 [.684]	15.24 [.600]	6	14	146492–7
5	14.83 [.584]	12.70 [.500]	5	12	146492–6
5	12.29 [.484]	10.16 [.400]	4	10	146492–5
5	9.75 [.384]	7.62 [.300]	3	8	146492–4
5	7.21 [.284]	5.08 [.200]	2	6	146492–3
5	4.67 [.184]	2.54 [.100]	1	4	146492–2
5	2.13 [.084]	– –	–	2	146492–1
PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

DRAWING UNITS: OTHERWISE SPECIFIED

0 PLC ± –
1 PLC ± 0.4[.015]
2 PLC ± 0.13[.005]
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL 4

FINISH SEE TABLE

DRN R. BROWN 19OCT2006
CHK J. GESFORD 19OCT2006
APVD J. GESFORD 19OCT2006

PRODUCT SPEC –
APPLICATION SPEC –
WEIGHT –

TE Connectivity

NAME HEADER ASSEMBLY, MOD II, STACKING, DOUBLE ROW, .025 SQ.POST, UNSHROUDED

SIZE A1 CAGE CODE 00779 DRAWING NO C-146492 RESTRICTED TO –

CUSTOMER DRAWING SCALE 4:1 SHEET 2 OF 2 REV A1

4NOS (3/11)

Downloaded from Elcodis.com electronic components distributor