

FM/AM Radio

For the availability of this product, please contact the sales office.

Description

CXA1611M/N/P is an IC designed for use in FM/AM radios, integrating all necessary functions from the front end detector stage of a radio.

Features

- Wide application range as it contains functions from the front end to detector stage.
- Operable for wide range of power supply voltages. ($V_{CC}=2$ to $9V$)
- Low current consumption.
(For FM, $I_D=6.0mA$, for AM, $I_D=4.0mA$, at $V_{CC}=6V$)
- Self-contained LED drive circuit for tuning.
- Self-contained FM band signal output circuit.
- Variable capacitance diode for FM AFC.
- Low distortion factor (0.1% Typ.) for FM detection output.
- AM IF output pin which can be adapted for the AM stereo.
- Needs few peripheral parts. Due to its small size, a high density packaging design is possible.

Structure


Bipolar silicon monolithic IC

Absolute Maximum Ratings ($T_a=25^\circ C$)

| | | | |
|-------------------------------|-----------|-------------|------------|
| • Supply voltage | V_{CC} | 14 | V |
| • Operating temperature | T_{opr} | -20 to +75 | $^\circ C$ |
| • Storage temperature | T_{stg} | -55 to +150 | $^\circ C$ |
| • Allowable power dissipation | P_D | 800 (DIP) | mW |
| | | 500 (SOP) | mW |
| | | 250 (SSOP) | mW |


Recommended Operating Condition

| | | | |
|----------------|----------|--------|---|
| Supply voltage | V_{CC} | 2 to 9 | V |
|----------------|----------|--------|---|

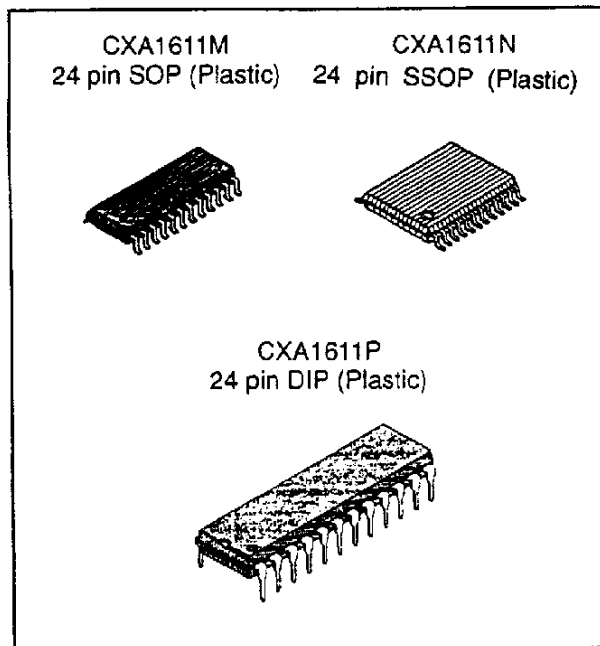


Sony reserves the right to change products and specifications without prior notice. This information does not convey any license by any implication or otherwise under any patents or other right. Application circuits shown, if any, are typical examples illustrating the operation of the devices. Sony cannot assume responsibility for any problems arising out of the use of these circuits.

Block Diagram

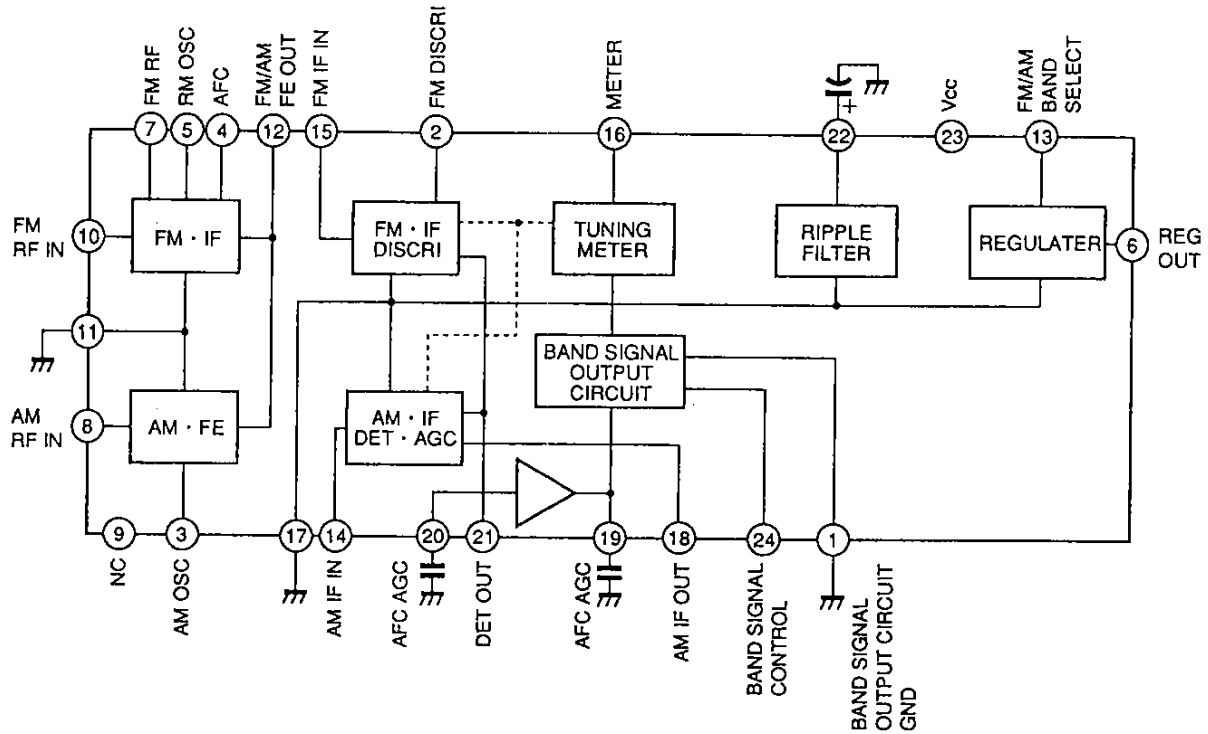

Pin Configuration (Top View)

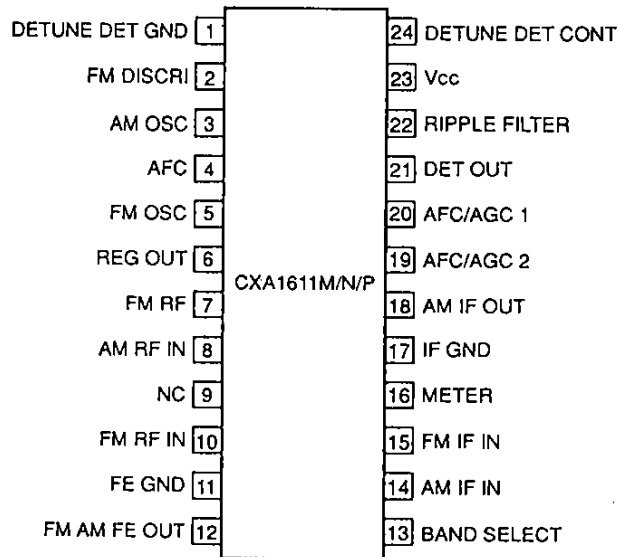

Pin Description


| Pin No. | Symbol | Description |
|---------|----------------------------|---|
| 1 | GND | Ground for band signal output |
| 2 | FM DISCRI | Discriminator pin; to be connected to FM discriminator |
| 3 | AM OSC | AM local oscillator circuit |
| 4 | AFC | AFC input pin |
| 5 | FM OSC | FM local oscillator |
| 6 | REG OUT | Regulator; 1.25V (typ.) |
| 7 | FM RF | FM RF input; connected to RF tank circuit |
| 8 | AM RF IN | AM RF input; connected to BAR ANT |
| 9 | NC | |
| 10 | FM RF IN | FM RF amplifier circuit; FM RF input |
| 11 | GND | Ground for front end |
| 12 | FM/AM FE OUT | IF output circuit for AM and FM; connected to AM and FM IF filters |
| 13 | BAND SELECT | Pin of FM and AM band switch; AM for "GND" and FM for "OPEN" |
| 14 | AM IF IN | Input stage of AM IF |
| 15 | FM IF IN | The first stage of FM IF amplifier circuit |
| 16 | METER | Meter drive circuit |
| 17 | IF GND | AM/FM IF stage; ground for detector stage |
| 18 | AM IF OUT | AM IF output; emitter output |
| 19 | AFC/AGC 2 | AFC pin for W band; to adjust the time constant (using a capacitor of external circuit) with AM |
| 20 | AFC/AGC 1 | AFC pin for J band; to adjust the time constant (using a capacitor in external circuit) with AM |
| 21 | DET OUT | Pin of the detector output; impedance; approx. 5k Ω |
| 22 | RIPPLE | The ripple filter; the hum suppression level of approx. 34.5dB can be obtained by connecting a 10 μ F capacitor |
| 23 | Vcc | IC power supply |
| 24 | BAND SIGNAL OUTPUT CONTROL | Band signal output amplitude is adjusted by connecting an outside resistor |

(Ta=25°C, See the Electrical Characteristics Test Circuit)

Electrical Characteristics

| No. | Test Item | Symbol | Switch Position | | | | | | | | | | Bias Condition | | | | Test Point | Output Waveform and Method of Test | Min. | Typ. | Max. | Unit | | | |
|-----|--|--------|-----------------|----|-----|----|----|----|-----|-----|-----|-----|----------------|-----------|-----|-----|------------|------------------------------------|------|------|------|-------|-------|--------|-----|
| | | | S1 | S2 | S3 | S4 | S5 | S6 | S7 | S8 | S9 | S9 | VIN1/VIN2 | VIN3/VIN4 | OFF | OFF | | | | | | | OFF | OFF | |
| 1 | Circuit current (1) | ID1 | OFF | B | OFF | B | A | A | ON | OFF | OFF | OFF | OFF | OFF | OFF | OFF | OFF | OFF | OFF | OFF | IB | 1.8 | 4.0 | 6.6 | mA |
| 2 | Circuit current (2) | ID2 | ON | A | ON | B | B | B | ON | ON | ON | ON | ON | ON | ON | ON | ON | ON | ON | ON | IB | 3.6 | 6.0 | 8.25 | mA |
| 3 | FM front end voltage gain (1) | GV1 | ON | A | ON | A | A | A | ON | ON | ON | ON | ON | ON | ON | ON | ON | ON | ON | ON | VD | 33 | 39 | 45 | dB |
| 4 | FM detector output level (1) | VD1 | OFF | B | OFF | B | B | B | OFF | OFF | OFF | OFF | OFF | OFF | OFF | OFF | OFF | OFF | OFF | OFF | VD | -25.2 | -22.5 | -19.0 | dBs |
| 5 | FM detector output level (2) | ΔVD | | | | | | | | | | | | | | | | | | | VD | -4.0 | - | +4.0 | dB |
| 6 | FM IF knee level | VD2 | | | | | | | | | | | | | | | | | | | VIN3 | - | 25 | 31 | dBμ |
| 7 | FM detector output distortion factor (1) | THD1 | | | | | | | | | | | | | | | | | | | VD | - | 0.1 | 1.1 | % |
| 8 | Deviation of FM IF center frequency | F1 | | | | | | | | | | | | | | | | | | | - | -55 | 0 | 55 | kHz |
| 9 | FM meter current (1) | IB1 | | | | | | | | | | | | | | | | | | | IB | 1.8 | 3.5 | 6.05 | mA |
| 10 | FM band signal output band width | F2 | ON | A | ON | B | B | B | ON | ON | ON | ON | ON | ON | ON | ON | ON | ON | ON | ON | IB | ±67.5 | ±110 | ±170.5 | kHz |
| 11 | AM front end voltage gain (2) | GV2 | ON | A | ON | A | A | A | OFF | OFF | OFF | OFF | OFF | OFF | OFF | OFF | OFF | OFF | OFF | OFF | VB | 19 | 24 | 28 | dB |
| 12 | AM IF voltage gain (3) | GV3 | OFF | B | OFF | B | B | B | OFF | OFF | OFF | OFF | OFF | OFF | OFF | OFF | OFF | OFF | OFF | OFF | VIN4 | 17 | 23 | 28 | dBμ |
| 13 | AM IF voltage gain (4) | ΔGV | | | | | | | | | | | | | | | | | | | VIN4 | -4 | 0 | 3 | dB |
| 14 | AM detector output level (3) | VD3 | | | | | | | | | | | | | | | | | | | VD | -25.5 | -22.5 | -19.0 | dBs |
| 15 | AM meter current (2) | IB2 | | | | | | | | | | | | | | | | | | | IB | 1.62 | 3.0 | 5.5 | mA |
| 16 | AM IF output level | VE | ON | A | ON | B | B | B | ON | ON | ON | ON | ON | ON | ON | ON | ON | ON | ON | ON | VE | 72 | 100 | 132 | mV |
| 17 | AM detector output distortion factor (2) | THD2 | ON | A | ON | A | A | A | ON | ON | ON | ON | ON | ON | ON | ON | ON | ON | ON | ON | VD | - | 0.6 | 1.1 | % |

Electrical Characteristics Test Circuit

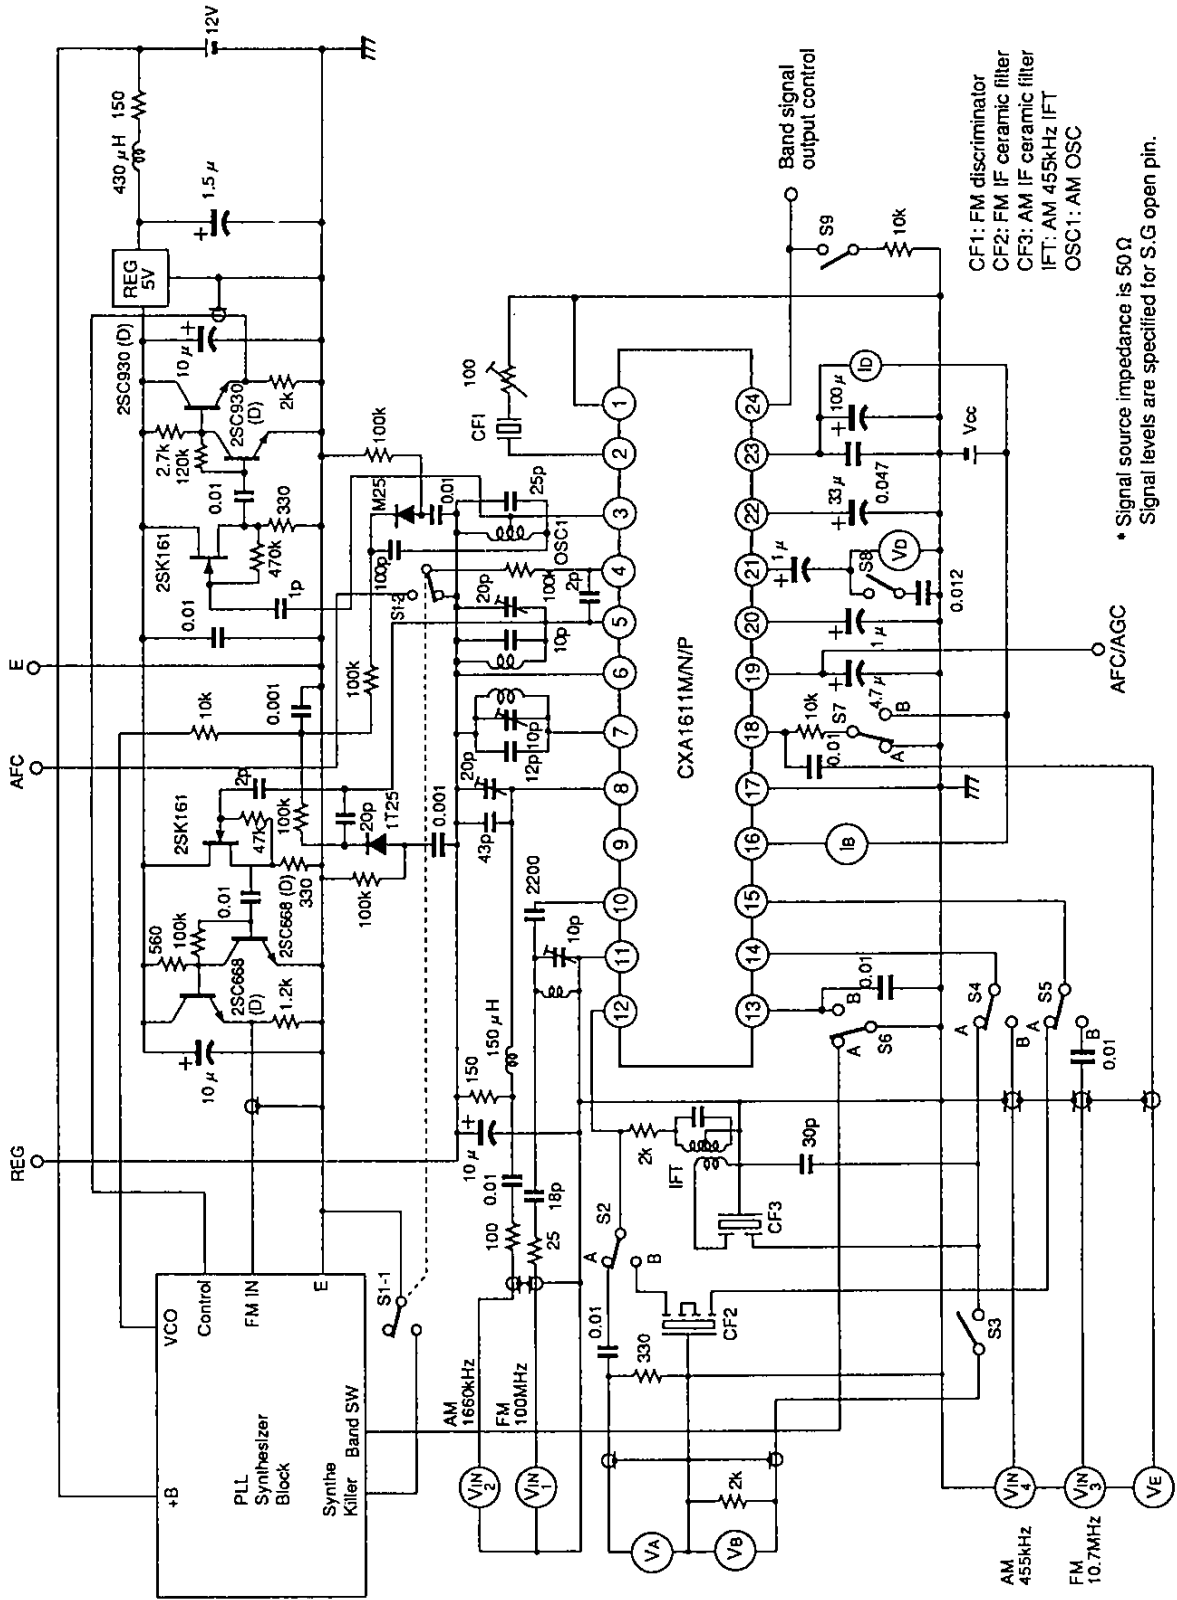







CF1: FM discriminator
 CF2: FM IF ceramic filter
 CF3: AM IF ceramic filter
 IFT: AM 455kHz IFT
 OSC1: AM OSC

• Signal source impedance is 50 Ω
 Signal levels are specified for S.G open pin.

Standard Circuit Design Data


| NO. | Symbol | Voltage (V)* | | | | Equivalent circuit |
|-----|-----------|--------------|------|--------|------|--------------------|
| | | Vcc=3V | | Vcc=6V | | |
| | | FM | AM | FM | AM | |
| 1 | GND | — | — | — | — | — |
| 2 | FM DISCRI | 2.18 | 2.70 | 3.08 | 3.60 | |
| 3 | AM OSC | 1.25 | 1.25 | 1.25 | 1.25 | |
| 4 | AFC | 1.25 | 1.15 | 1.25 | 1.15 | |
| 6 | REG OUT | 1.25 | 1.25 | 1.25 | 1.25 | |
| 5 | FM OSC | 1.25 | 1.25 | 1.25 | 1.25 | |
| 7 | FM RF | 1.25 | 1.25 | 1.25 | 1.25 | |
| 10 | FM RF IN | 0.3 | 0 | 0.3 | 0 | |

* See the DC Voltage Test Circuit.
Values are typical values.
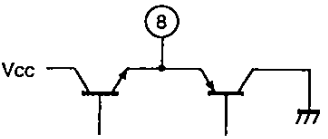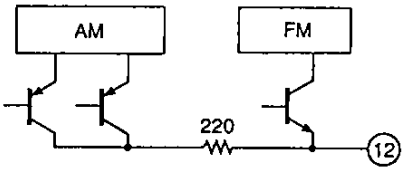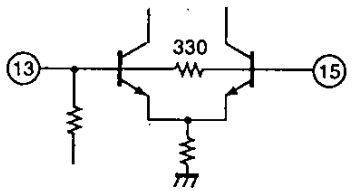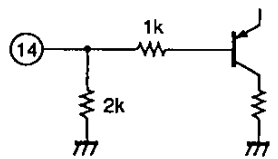
| NO. | Symbol | Voltage (V)* | | | | Equivalent circuit |
|-----|--------------|--------------|------|--------|------|---|
| | | Vcc=3V | | Vcc=6V | | |
| | | FM | AM | FM | AM | |
| 8 | AM RF IN | 1.25 | 1.25 | 1.25 | 1.25 |  |
| 9 | NC | — | — | — | — | — |
| 11 | GND | — | — | — | — | — |
| 12 | FM/AM FE OUT | 0.57 | 0.2 | 0.8 | 0.2 |  |
| 13 | BAND SELECT | 1.25 | 0 | 1.25 | 0 |  |
| 15 | FM IF IN | 1.25 | 0 | 1.25 | 0 | |
| 14 | AM IF IN | 0 | 0 | 0 | 0 |  |
| 16 | METER | 1.6 | 1.6 | 4.5 | 4.5 |  |
| 17 | IF GND | | | | | |
| 18 | AM IF OUT | | | | |  |


| NO. | Symbol | Voltage (V)* | | | | Equivalent circuit |
|-----|----------------------------|--------------|------|--------|------|--------------------|
| | | Vcc=3V | | Vcc=6V | | |
| | | FM | AM | FM | AM | |
| 19 | AFC/AGC 2 | 1.15 | 1.47 | 1.15 | 1.47 | |
| 20 | AFC/AGC 1 | 1.47 | 1.15 | 1.47 | 1.15 | |
| 21 | DET OUT | 1.0 | 1.0 | 1.0 | 1.0 | |
| 22 | RIPPLE | 2.7 | 2.7 | 4.0 | 4.0 | |
| 23 | Vcc | 3.0 | 3.0 | 6.0 | 6.0 | |
| 24 | BAND SIGNAL OUTPUT CONTROL | | | | | |

DC Voltage Test Circuit

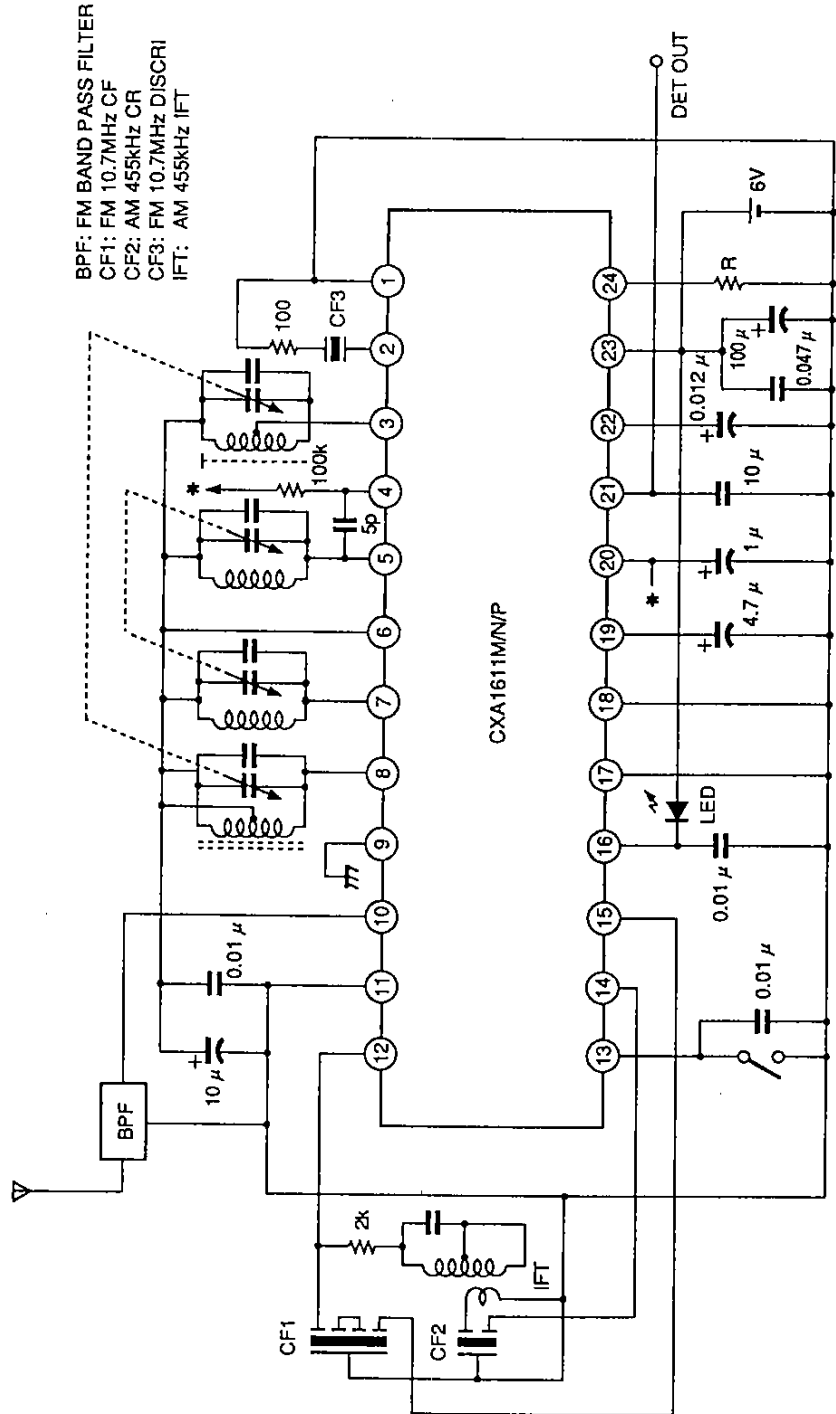



Note) · The meter current is cut off under the following conditions: CDA 10.7MG1 (Murata Seisakusho co.) is used as CF1, and the input frequency is either 10.7MHz ± 100kHz or more when R is 10kΩ, or 10.7MHz ± 150kHz or more when R is 100kΩ.
 · The band signal output function cuts off the meter current when the signal is out of tuning by a specified frequency from the FM IF center frequency.
 · The band signal output function is cut off when the voltage on pin 24 is the same as the regulator voltage or Vcc.



Application Circuit

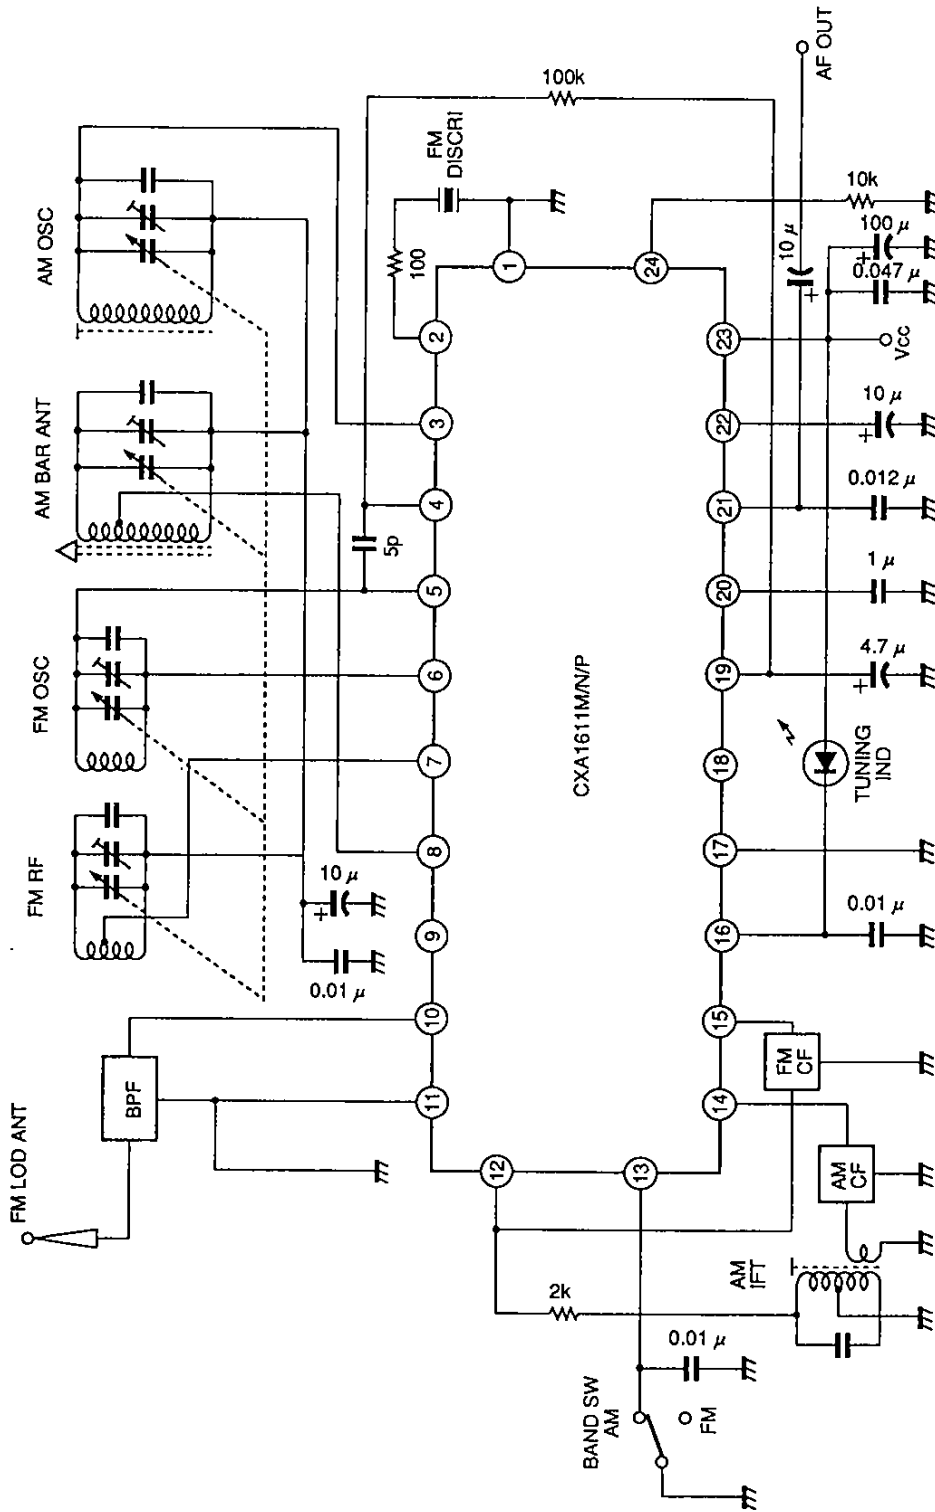


Application circuits shown are typical examples illustrating the operation of the devices. Sony cannot assume responsibility for any problems arising out of the use of these circuits or for any infringement of third party patent and other right due to same.

Example of Representative Characteristics

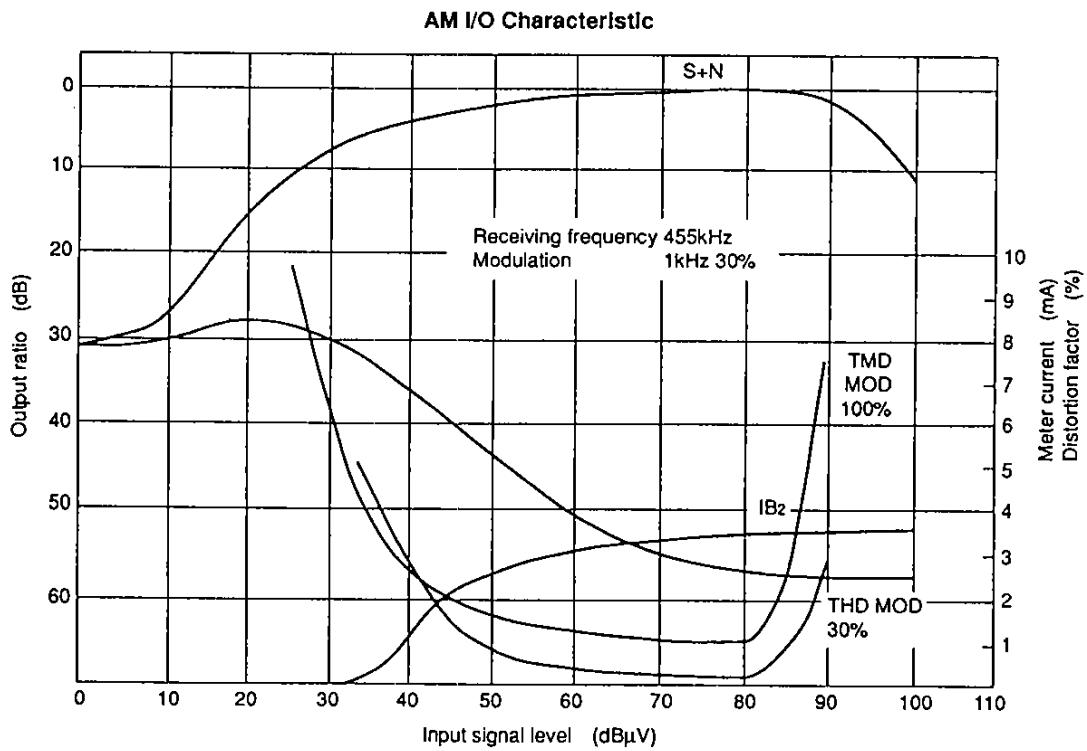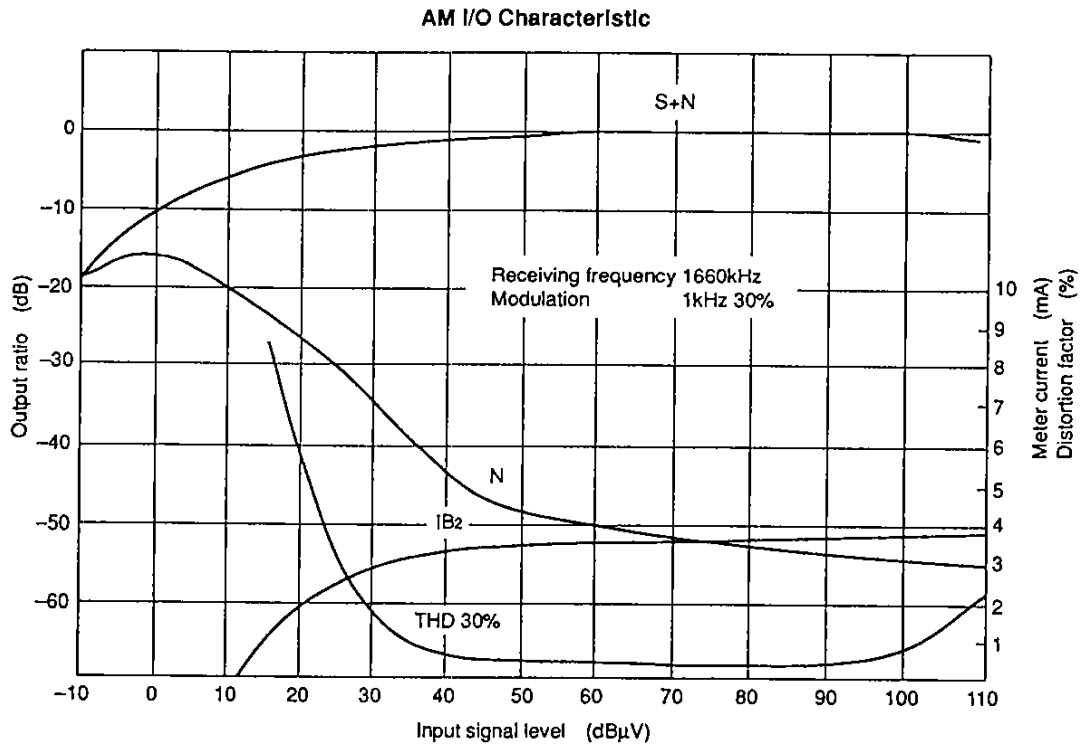


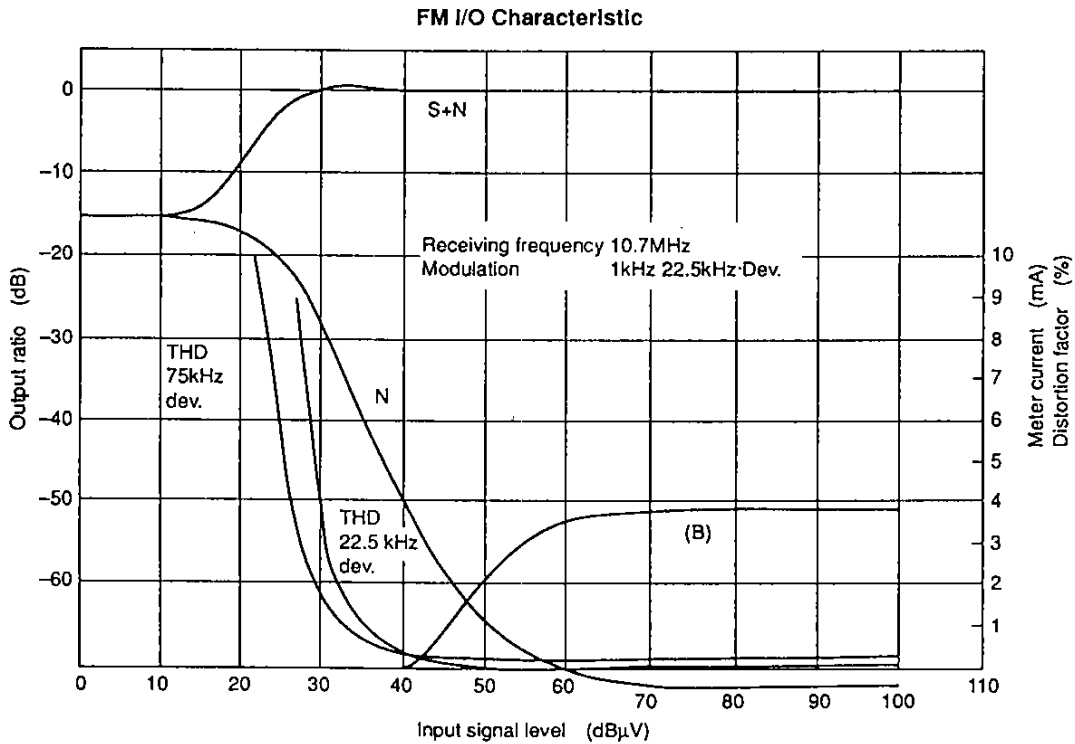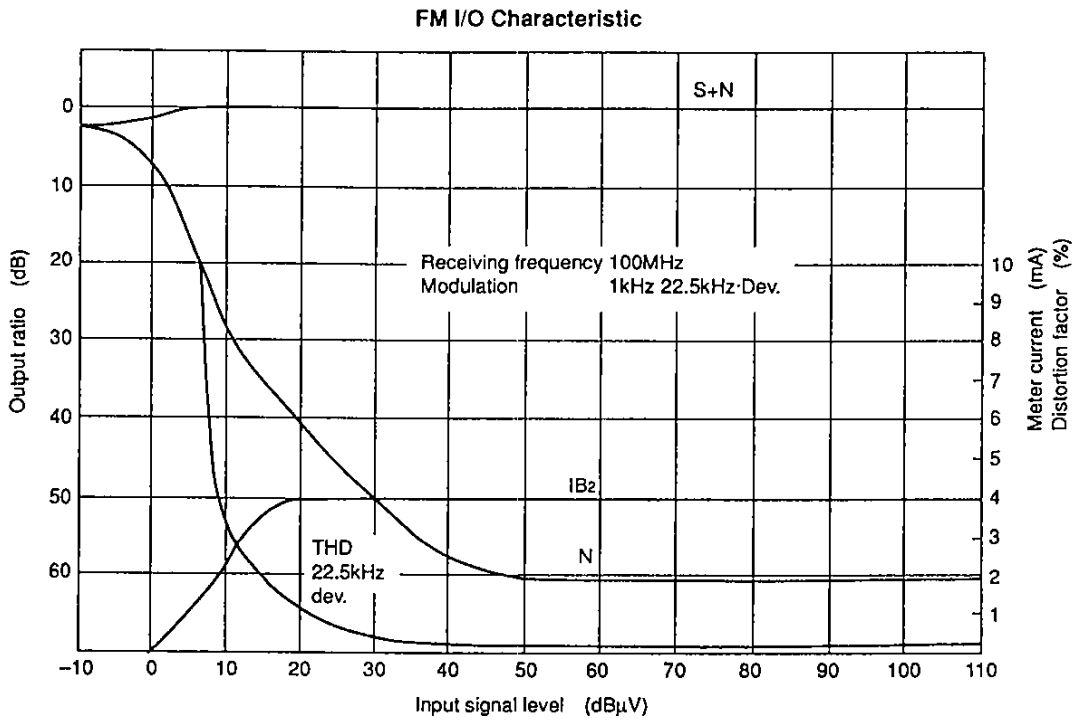


FM Band signal output characteristic
(Narrow band)

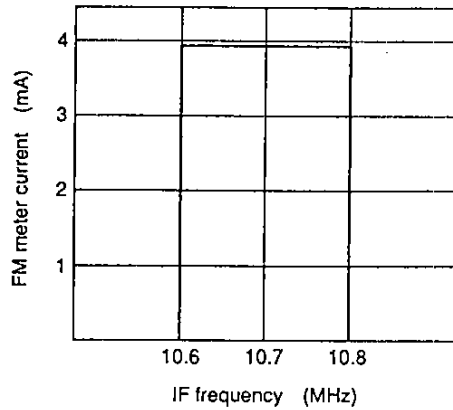


FM Band signal output characteristic
(Normal)

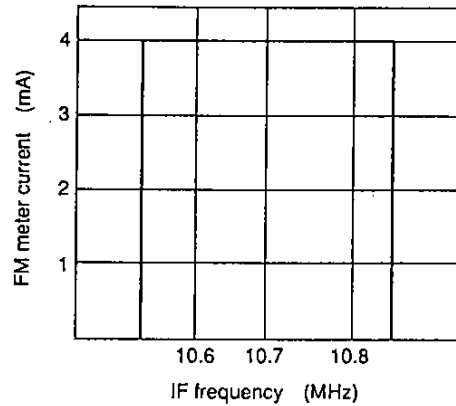


Regulator output vs. Supply voltage characteristics

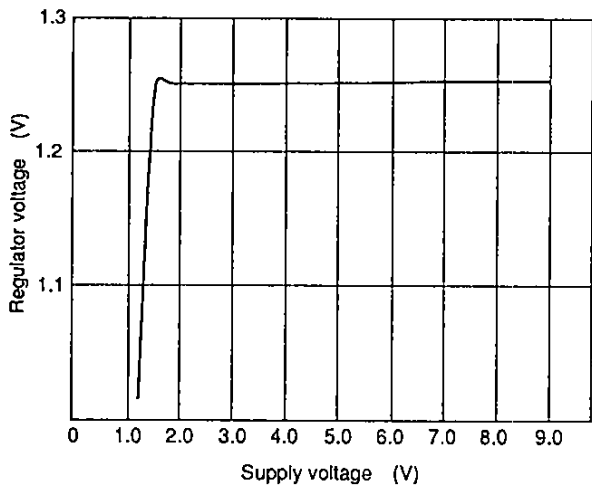


Temperature characteristics of circuit current

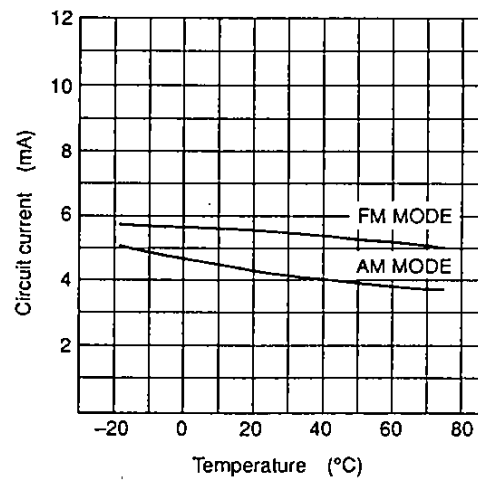


Temperature characteristics of regulator

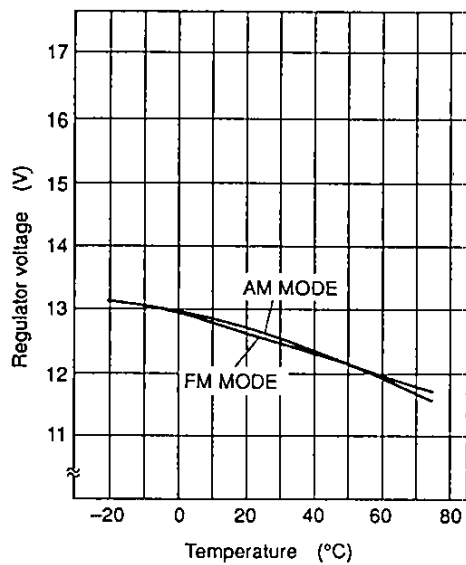


Temperature characteristics of detector output

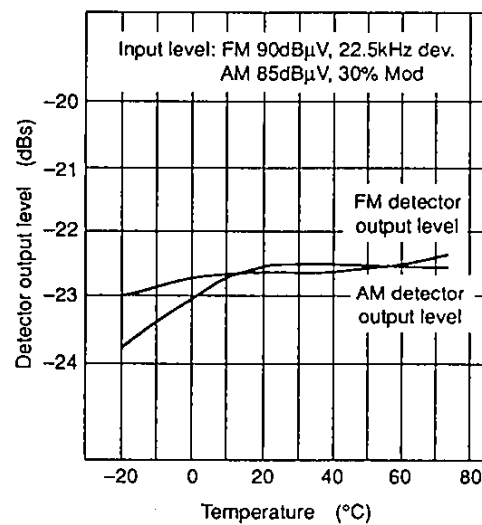

AM IF pin output vs. Input (Overall)

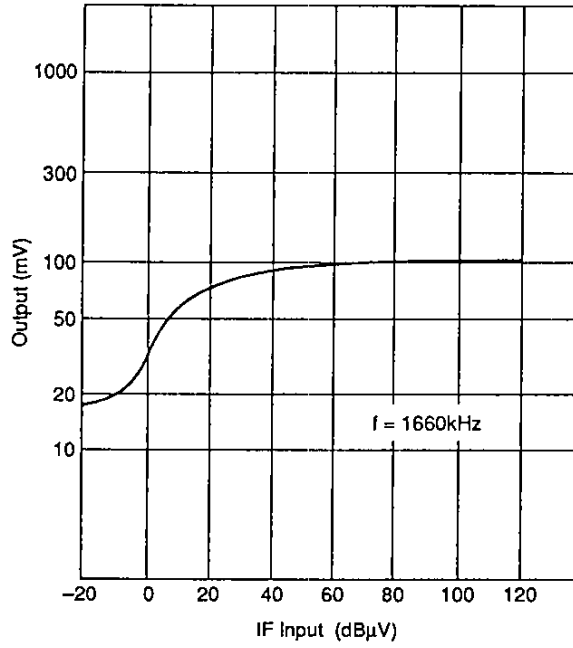


AM IF pin output vs. Input

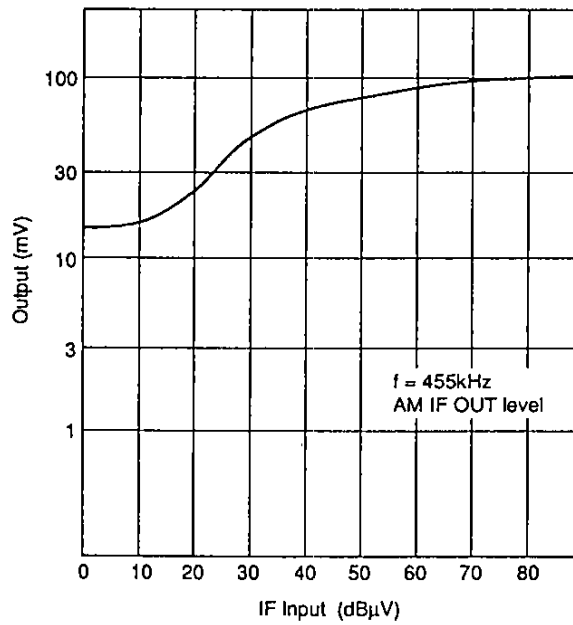

Coil data

AM OSC


WIRE ϕ 0.06mm 2UEW



| f (kHz) | L (μ H) | Qo | t | |
|---------|--------------|-----|--------|--------|
| | | | 1 to 3 | 4 to 6 |
| 796 | 270 | 125 | 107 | 29 |

Equivalent to L-5K7 H5 R12-1684X.
Mitsumi Electric Co., Ltd. or
7TRS-8441 TOKO Co., Ltd.

AM Bar ANT




| f (kHz) | L (μ H) | 1 | 2 |
|---------|--------------|-----|-----|
| 796 | 650 | 91t | 20t |

BPF PFWEB SOSHIN (88 to 108MHz)

VC PVC2LXT-16L MITUMI
CF1 CDA10.7MG1 } or
CF2 SFU-455B } MURATA CF1 BFCFL-455
CF3 SFE10.7MA5 } TOKO

AM IFT


WIRE ϕ 0.07mm UEW




| Co (pF) | Qo | t | | |
|---------|----|--------|--------|--------|
| | | 1 to 2 | 2 to 3 | 4 to 6 |
| 180 | 90 | 111 | 35 | 7 |

Equivalent to 21K7 H5 R12-8558A.
Mitsumi Electric Co., Ltd. or
7MC-7789N TOKO Co., Ltd.



FM RF

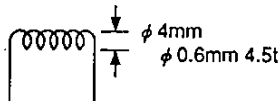

FM OSC



Evaluation Board

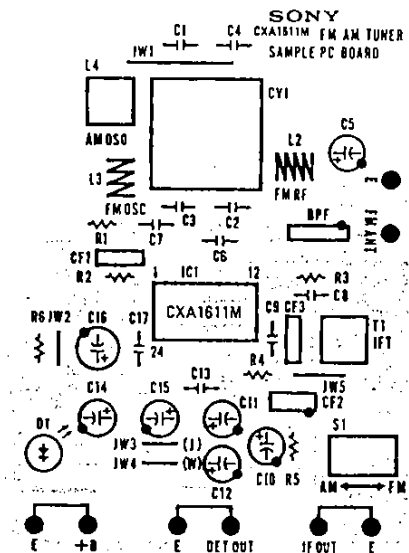

Parts Layout (mounting side)





Pattern

Package Outline Unit : mm

CXA1611M

24PIN SOP (PLASTIC)

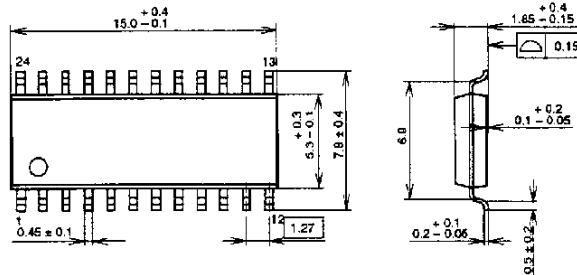


PACKAGE STRUCTURE

| | |
|------------|---------------|
| SONY CODE | SOP-24P-L01 |
| EIAJ CODE | SOP024-P-0300 |
| JEDEC CODE | |

| | |
|------------------|-----------------|
| MOLDING COMPOUND | EPOXY RESIN |
| LEAD TREATMENT | SOLDER PLATING |
| LEAD MATERIAL | 42/COPPER ALLOY |
| PACKAGE MASS | 0.3g |

CXA1611N

24PIN SSOP(PLASTIC)

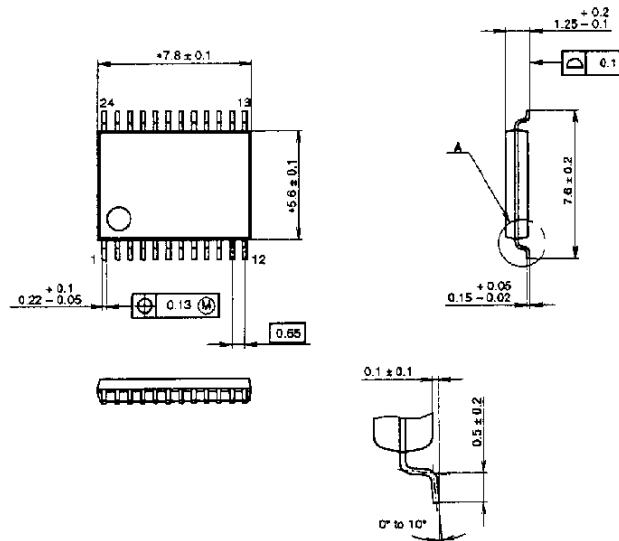

NOTE: Dimensions "A" does not include mold protrusion.

DETAIL A

PACKAGE STRUCTURE

| | |
|------------|----------------|
| SONY CODE | SSOP-24P-L01 |
| EIAJ CODE | SSOP024-P-0058 |
| JEDEC CODE | |


| | |
|------------------|--------------------------|
| PACKAGE MATERIAL | EPOXY RESIN |
| LEAD TREATMENT | SOLDER/PALLADIUM PLATING |
| LEAD MATERIAL | 42/COPPER ALLOY |
| PACKAGE MASS | 0.1g |

NOTE : PALLADIUM PLATING

This product uses S-PdPPF (Sony Spec.-Palladium Pre-Plated Lead Frame).

CXA1611P

24PIN DIP(PLASTIC)

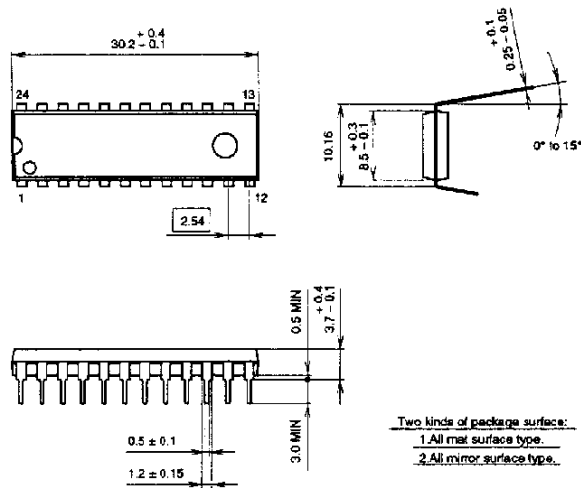

PACKAGE STRUCTURE

| | | | |
|------------|---------------|------------------|-----------------|
| SONY CODE | DIP-24P-01 | PACKAGE MATERIAL | EPOXY RESIN |
| EIAJ CODE | DIP024-P-0400 | LEAD TREATMENT | SOLDER PLATING |
| JEDEC CODE | — | LEAD MATERIAL | 42/COPPER ALLOY |
| | | PACKAGE MASS | 2.6g |