



THIS DRAWING IS UNPUBLISHED
 ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	CHK	APP
AD 39		REVISED PER EDD-11-04620	11MM11	RK	HMR

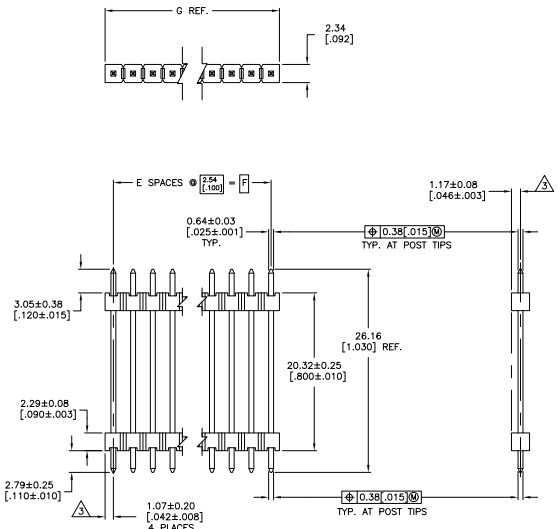

- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
 - TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
 - FINISH: 0.00254-0.00508 [.000100-.000200] BRIGHT TIN-LEAD OVER 0.00127 [.000050] NICKEL ENTIRE POST.
 - FINISH: 0.00254-0.00508 [.000100-.000200] MATTE TIN OVER 0.00127 [.000050] NICKEL ENTIRE POST.

PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER	
△	101.18	99.08		39	40	9-146468-0
△	13.984	3.900		38	39	8-146468-9
△	98.65	96.52		37	38	8-146468-8
△	95.11	93.98		36	37	8-146468-7
△	13.684	3.600		35	36	8-146468-6
△	85.95	83.82		34	35	8-146468-5
△	13.384	3.300		33	34	8-146468-4
△	82.41	80.28		32	33	8-146468-3
△	80.87	78.74		31	32	8-146468-2
△	13.084	3.000		30	31	8-146468-1
△	78.27	76.14		29	30	8-146468-0
△	12.784	2.700		28	29	7-146468-9
△	74.67	72.54		27	28	7-146468-8
△	68.17	66.04		26	27	7-146468-7
△	12.484	2.400		25	26	7-146468-6
△	65.63	63.50		24	25	7-146468-5
△	12.184	2.100		23	24	7-146468-4
△	63.09	60.96		22	23	7-146468-3
△	11.884	1.800		21	22	7-146468-2
△	59.55	57.42		20	21	7-146468-1
△	11.584	1.500		19	20	7-146468-0
△	57.01	54.88		18	19	6-146468-9
△	11.284	1.200		17	18	6-146468-8
△	54.47	52.34		16	17	6-146468-7
△	10.984	1.000		15	16	6-146468-6
△	51.93	49.80		14	15	6-146468-5
△	10.684	.900		13	14	6-146468-4
△	49.39	47.26		12	13	6-146468-3
△	10.384	.800		11	12	6-146468-2
△	46.85	44.72		10	11	6-146468-1
△	10.084	.700		9	10	6-146468-0
△	44.31	42.18		8	9	5-146468-9
△	9.784	.600		7	8	5-146468-8
△	41.77	39.64		6	7	5-146468-7
△	9.484	.500		5	6	5-146468-6
△	39.23	37.10		4	5	5-146468-5
△	9.184	.400		3	4	5-146468-4
△	36.69	34.56		2	3	5-146468-3
△	8.884	.300		1	2	5-146468-2
△	34.15	32.02		-	1	5-146468-1
△	8.584	.200		-	-	5-146468-0

PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER	
△	101.18	99.08		39	40	4-146468-0
△	13.984	3.900		38	39	3-146468-9
△	98.65	96.52		37	38	3-146468-8
△	95.11	93.98		36	37	3-146468-7
△	13.684	3.600		35	36	3-146468-6
△	85.95	83.82		34	35	3-146468-5
△	13.384	3.300		33	34	3-146468-4
△	82.41	80.28		32	33	3-146468-3
△	80.87	78.74		31	32	3-146468-2
△	13.084	3.000		30	31	3-146468-1
△	78.27	76.14		29	30	3-146468-0
△	12.784	2.700		28	29	2-146468-9
△	74.67	72.54		27	28	2-146468-8
△	68.17	66.04		26	27	2-146468-7
△	12.484	2.400		25	26	2-146468-6
△	65.63	63.50		24	25	2-146468-5
△	12.184	2.100		23	24	2-146468-4
△	63.09	60.96		22	23	2-146468-3
△	11.884	1.800		21	22	2-146468-2
△	59.55	57.42		20	21	2-146468-1
△	11.584	1.500		19	20	2-146468-0
△	57.01	54.88		18	19	1-146468-9
△	11.284	1.200		17	18	1-146468-8
△	54.47	52.34		16	17	1-146468-7
△	10.984	1.000		15	16	1-146468-6
△	51.93	49.80		14	15	1-146468-5
△	10.684	.900		13	14	1-146468-4
△	49.39	47.26		12	13	1-146468-3
△	10.384	.800		11	12	1-146468-2
△	46.85	44.72		10	11	1-146468-1
△	10.084	.700		9	10	1-146468-0
△	44.31	42.18		8	9	146468-9
△	9.784	.600		7	8	146468-8
△	41.77	39.64		6	7	146468-7
△	9.484	.500		5	6	146468-6
△	39.23	37.10		4	5	146468-5
△	9.184	.400		3	4	146468-4
△	36.69	34.56		2	3	146468-3
△	8.884	.300		1	2	146468-2
△	34.15	32.02		-	1	146468-1
△	8.584	.200		-	-	146468-0

THIS DRAWING IS A CONTROLLED DOCUMENT. IT IS THE PROPERTY OF TE CONNECTIVITY. IT IS TO BE KEPT IN CONFIDENCE AND NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM. WITHOUT THE WRITTEN PERMISSION OF TE CONNECTIVITY.

TE Connectivity
 TE CONNECTIVITY
 TE CONNECTIVITY

DATE: 00779 G=146468
 CUSTOMER DRAWING