

AN6454SH


Pager Direct Conversion FSK Demodulator Mixer IC

■ Overview

The AN6454SH supports direct conversion FSK demodulation for pagers, and incorporates two mixers.

■ Features


- Low current consumption : 1mA
- Incorporates two mixers. 450MHz input frequency.
- Small surface-mount package with 0.5mm pitch.

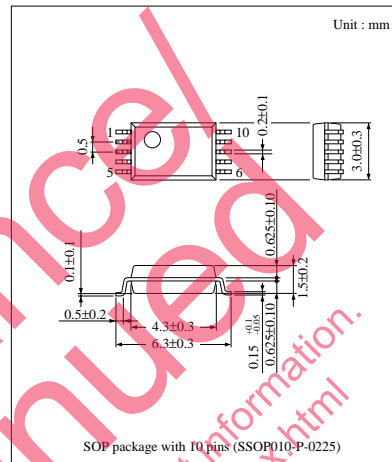

■ Pin Descriptions

Pin No.	Description	Pin No.	Description
1	MIX bias	6	MIX (2) output
2	L-OSC input (1)	7	MIX (1) output
3	L-OSC input (2)	8	GND
4	MIX current control	9	RF bias
5	V _{cc}	10	RF input

■ Functional Block Diagram

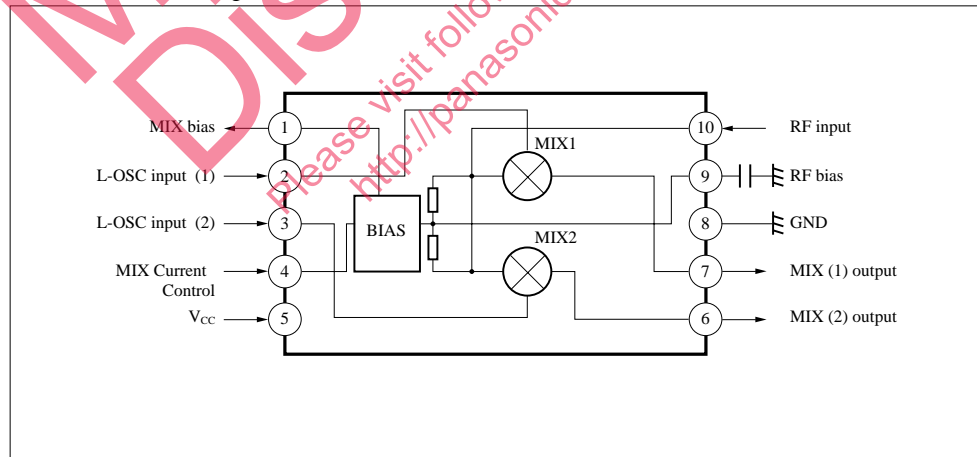

■ Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Supply voltage	V _{CC}	4	V
Supply current	I _{CC}	20	mA
Power dissipation	P _D	143.5 (Ta=75°C)	mW
Operating ambient temperature	T _{opr}	-20 to +70	°C
Storage temperature	T _{stg}	-55 to +125	°C

Note) Protect pins 3, 9, and 10 from electrostatic discharge.

■ Recommended Operating Range

Parameter	Symbol	Range
Operating supply voltage range	V _{CC}	1.8 to 3V

■ Electrical Characteristics (V_{CC}=2.0V, Ta=25±2°C)

Parameter	Symbol	Condition	min	typ	max	Unit
Current consumption	I _{tot}		0.6	1.0	1.4	mA
MIX output level (1)	VMIX1	Input Level -54dBm, f=450.0045MHz	-38	-34	-30	dBs
MIX output level (2)	VMIX1	Input Level -54dBm, f=450.0045MHz	-38	-34	-30	dBs

■ Electrical Characteristics (Design Values for Reference) (V_{CC}=2.0V, Ta=25±2°C)

The following are design values for reference only (not guaranteed)

Parameter	Symbol	Condition	min	typ	max	Unit
RF bias voltage	V _{RF}		—	0.745	—	V
MIX bias current	V _{MIX}		—	1.3	—	V
MIX output level difference	DV _{mix}	DV _{mix} =V _{mix1} -V _{mix2}	-3.2	—	3.2	dB
Output noise level	V _{n3}	$V_{n3} = \sqrt{\frac{(V_{n2})^2 + (V_{n2})^2}{2}}$	—	—	25	dBs

■ Pin Descriptions

Pin No.	Symbol	Description	Equivalent circuit
1	MIX bias	Local oscillator bias. Normally grounded through a capacitor.	
2	L-OSC input 1	Local oscillator inputs to Pin2 w and 3 are different in phase by $\pi/2$. These inputs are different in frequency by FM Dev from Pin 10 input.	
3	L-OSC input 2		
4	MIX-current control	Current input to this pin controls the IC's operation and total current. This pin may be connected to Pin 22 of AN6400.	
5	V _{CC}	This is the supply voltage pin.	
6	MIX2 output	Direct-conversion mixer outputs (FM Dev). These outputs are different in phase by $\pi/2$ from each other. These pins may be to AN6400 or other direct conversion demodulator ICs for data retrieval.	
7	MIX1 output		

■ Pin Descriptions (Cont.)

Pin No.	Symbol	Description	Equivalent circuit
8	GND	This is the ground pin.	—————
9	RF bias	This is the bias pin for RF input to Pin 10. The bias us internally provided. This pin must be ground through a capacitor.	
10	RF input	FSK-modulated RF signals from an RF amplifier are input to this pin. RF signals with up to 450MHz are acceptable.	

Maintenance/Discontinued

Please visit following URL about latest information.
<http://panasonic.co.jp/semicon/e-index.html>

Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products, and no license is granted under any intellectual property right or other right owned by our company or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information described in this book.
- (3) The products described in this book are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).
Consult our sales staff in advance for information on the following applications:
 - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
 - Any applications other than the standard applications intended.
- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.
 - Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.
- (7) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of Matsushita Electric Industrial Co., Ltd.