



THIS DRAWING IS UNPUBLISHED
 ALL RIGHTS RESERVED

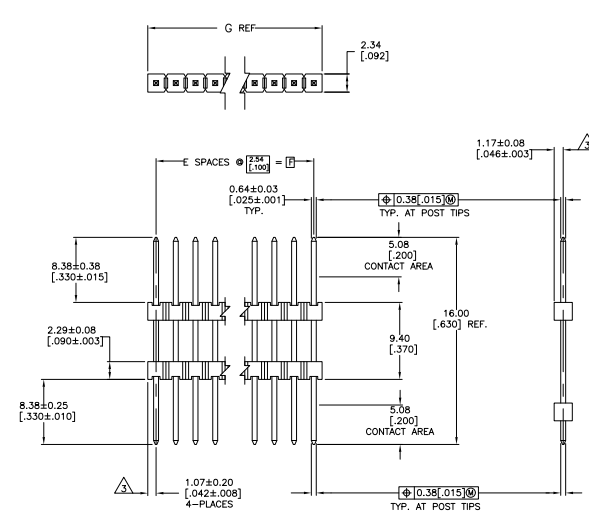

- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
 - 2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- ▲ THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
 ▲ HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
 ▲ FINISH: 0.000381 [0.000015] GOLD ON CONTACT AREA, ALL OVER 0.00127 [0.000050] NICKEL ENTIRE POST.

REV	DATE	BY	CHK	DESCRIPTION	DATE	BY	CHK
AD	00			REVISED PER EDD-11-004820	11MAR11	RK	HMR

REV	DATE	BY	CHK	DESCRIPTION	DATE	BY	CHK
101.19	99.06	39	40	4-146470-0			
3.984	3.900						
98.65	96.52	38	39	3-146470-9			
3.884	3.800						
96.11	93.98	37	38	3-146470-8			
3.784	3.700						
93.57	91.44	36	37	3-146470-7			
3.684	3.600						
91.03	88.90	35	36	3-146470-6			
3.584	3.500						
88.49	86.36	34	35	3-146470-5			
3.484	3.400						
85.95	83.82	33	34	3-146470-4			
3.384	3.300						
83.41	81.28	32	33	3-146470-3			
3.284	3.200						
80.87	78.74	31	32	3-146470-2			
3.184	3.100						
78.33	76.20	30	31	3-146470-1			
3.084	3.000						
75.79	73.66	29	30	3-146470-0			
2.984	2.900						
73.25	71.12	28	29	2-146470-9			
2.884	2.800						
70.71	68.58	27	28	2-146470-8			
2.784	2.700						
68.17	66.04	26	27	2-146470-7			
2.684	2.600						
65.63	63.50	25	26	2-146470-6			
2.584	2.500						
63.09	60.96	24	25	2-146470-5			
2.484	2.400						
60.55	58.42	23	24	2-146470-4			
2.384	2.300						
58.01	55.88	22	23	2-146470-3			
2.284	2.200						
55.47	53.34	21	22	2-146470-2			
2.184	2.100						
52.93	50.80	20	21	2-146470-1			
2.084	2.000						
50.39	48.26	19	20	2-146470-0			
1.984	1.900						
47.85	45.72	18	19	1-146470-9			
1.884	1.800						
45.31	43.18	17	18	1-146470-8			
1.784	1.700						
42.77	40.64	16	17	1-146470-7			
1.684	1.600						
40.23	38.10	15	16	1-146470-6			
1.584	1.500						
37.69	35.56	14	15	1-146470-5			
1.484	1.400						
35.15	33.02	13	14	1-146470-4			
1.384	1.300						
32.61	30.48	12	13	1-146470-3			
1.284	1.200						
30.07	27.94	11	12	1-146470-2			
1.184	1.100						
27.53	25.40	10	11	1-146470-1			
1.084	1.000						
24.99	22.86	9	10	1-146470-0			
0.984	0.900						
22.45	20.32	8	9	146470-9			
0.884	0.800						
19.91	17.78	7	8	146470-8			
0.784	0.700						
17.37	15.24	6	7	146470-7			
0.684	0.600						
14.83	12.70	5	6	146470-6			
0.584	0.500						
12.29	10.16	4	5	146470-5			
0.484	0.400						
9.75	7.62	3	4	146470-4			
0.384	0.300						
7.21	5.08	2	3	146470-3			
0.284	0.200						
4.67	2.54	1	2	146470-2			
0.184	0.100						
2.13	-	-	1	146470-1			
0.084	-	-					
G	F	E	NO. OF POSITIONS	PART NUMBER			

THIS DRAWING IS A CONTROLLED DOCUMENT. IF REVISIONS ARE MADE, THE ORIGINAL MUST BE DESTROYED.

DIMENSIONS: INCHES (DIMENSIONS IN PARENTHESES ARE METRIC)
 UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE TO BE TAKEN TO THE CENTER OF THE POST.
 FINISH: 0.000381 [0.000015] GOLD ON CONTACT AREA, ALL OVER 0.00127 [0.000050] NICKEL ENTIRE POST.

CUSTOMER DRAWING: A100779 (G=146470)
 SIZE: 4.1
 SHEET: 1 OF 1