

# AN7017S, AN7017SB

FM/TV Front-end ICs for 1.5V Headphone Stereo, Radio Cassette Recorder

■ Overview


The AN7017S and the AN7017SB are the ICs incorporating FM/TV front-end most suitable for headphone stereo.

Sealed in a 16-pin flat package, the chip operates stably at TV band (170MHz ~ 222MHz) FM band (76MHz ~ 108MHz).


RF amplifiers and oscillations are provided in FM/TV band individually, and are designed most suitably. So both characteristics of FM/TV band are satisfied.

■ Features

- Low current consumption
- Band switching circuit built-in
- A single chip integrating FM/TV band
- IF amp. built-in

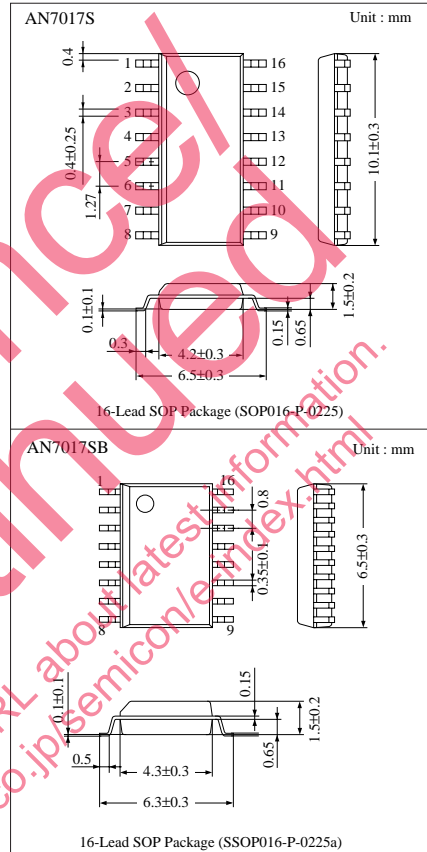

■ Block Diagram

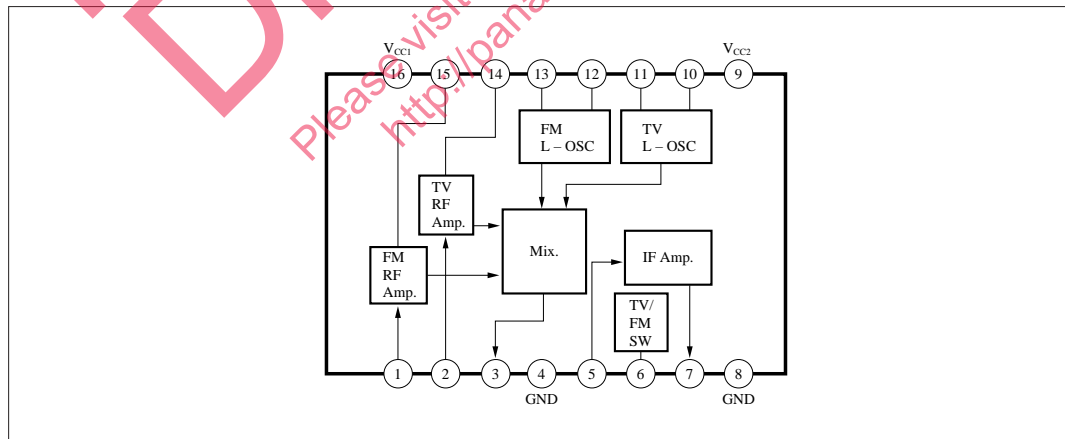

■ Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Supply Voltage	V <sub>CC</sub>	2.5	V
Supply Current	I <sub>CC</sub>	10	mA
Power Dissipation	P <sub>D</sub>	30	mW
Operating Ambient Temperature	T <sub>opr</sub>	-22 ~ + 75	°C
Storage Temperature	T <sub>stg</sub>	-55 ~ + 125	°C

■ Recommended Operating Range (Ta=25°C)

Parameter	Symbol	Range
Operating Supply Voltage Range	V <sub>CC</sub>	1V ~ 2V


■ Electrical Characteristics (V<sub>CC</sub>=1.2V, Ta = 25°C)

	Parameter	Symbol	Condition	min.	typ.	max.	Unit
FM	No Signal Current	I <sub>tot</sub> (FM)	Note) V <sub>CC</sub> =1V V <sub>in</sub> = 60dBμ	—	2.5	—	mA
	Conversion Gain	G <sub>conv</sub> (FM)		—	31	—	dB
	Oscillation Voltage	V <sub>osc</sub> (FM)		—	73	—	mV
	S/N	S/N (FM)		—	55	—	dB
TV	No Signal Current	I <sub>tot</sub> (TV)	Note) V <sub>CC</sub> =1V V <sub>in</sub> =60dBμ	—	3.2	—	mA
	Conversion Gain	G <sub>conv</sub> (TV)		—	27	—	dB
	Oscillation Voltage	V <sub>osc</sub> (TV)		—	57	—	mV
	S/N	S/N (TV)		—	53	—	dB


Note) Conversion Gain= 20log (ΔV<sub>(μV)</sub>+100)  
ΔV is output difference at 40dBμ and 46dBμ.

■ Characteristics Curve


Supply Voltage Characteristics (FM)–  
Oscillation Frequency Deviation  
S/N, S/N Sensitivity, Limiter Sensitivity, I<sub>tot</sub>

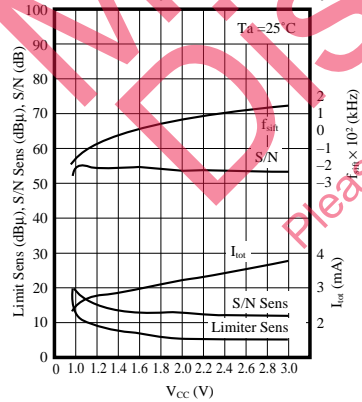

Input/Output Characteristics -  
S/N, V<sub>out</sub>


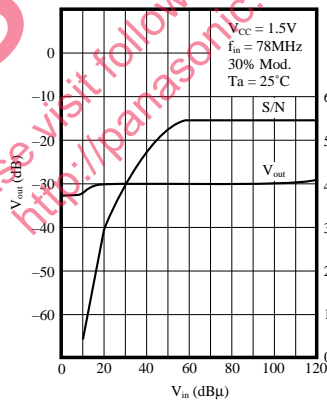








Frequency Characteristics (FM) –V<sub>osc</sub>, S/N Sensitivity,  
Limiter Sensitivity

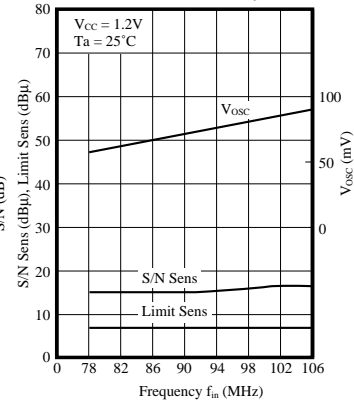



### ■ Pin Descriptions

Pin No.	Pin Name	Typ. Waveform	Description	Equivalent Circuit
1	FM RF Input	FM signal	FM RF input pin	
15	FM RF Output	FM signal	FM RF output pin	
4	GND	DC 0V	GND pin Used for RF amp. /Mixer.	
3	Mix. Output	10.7MHz IF signal	Mix. output pin Ceramic Filter connect to output.	
5	IF Input	10.7MHz IF signal	IF input pin	
6	TV/FM switch		TV/FM switching At FM, stop the current source of TV circuit by connecting Pin6 to V <sub>CC</sub> , and at TV, stop the current source of FM circuit by opening this.	
7	IF Output	10.7MHz IF signal	IF output pin	
8	GND		GND pin Used for IF amp. /oscillation circuit current source	

Panasonic

■ Pin Descriptions (Cont.)

Pin No.	Pin Name	Typ. Waveform	Description	Equivalent Circuit
9	V <sub>CC2</sub>	DC 1.5V	Supply voltage pin Used for IF amp. /oscillation circuit current source	_____
10 · 11	TV OSC	160MHz ~ 216MHz oscillation	TV OSC pin	
12 · 13	FM OSC	65MHz ~ 96MHz oscillation	FM OSC pin	
2	TV RF Input	TV signal	TV RF input pin	
14	TV RF Output	TV signal	TV RF output pin	
16	V <sub>CC1</sub>	DC 1.5V	Supply voltage pin Used for RF amp., mixer	_____

## Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products, and no license is granted under any intellectual property right or other right owned by our company or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information described in this book.
- (3) The products described in this book are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).  
Consult our sales staff in advance for information on the following applications:
  - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
  - Any applications other than the standard applications intended.
- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.
  - Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.
- (7) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of Matsushita Electric Industrial Co., Ltd.