


- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
 - TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- △ THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- △ HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
- △ FINISH: 0.000381 [0.00015] GOLD ON CONTACT AREA, 0.00254-0.00508 [0.00100-0.00200] MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER 0.00127 [0.00050] NICKEL.
- △ FINISH: 0.000381 [0.00015] GOLD ON CONTACT AREA, 0.00254-0.00508 [0.00100-0.00200] MATTE TIN ON SOLDER TAIL, ALL OVER 0.00127 [0.00050] NICKEL.

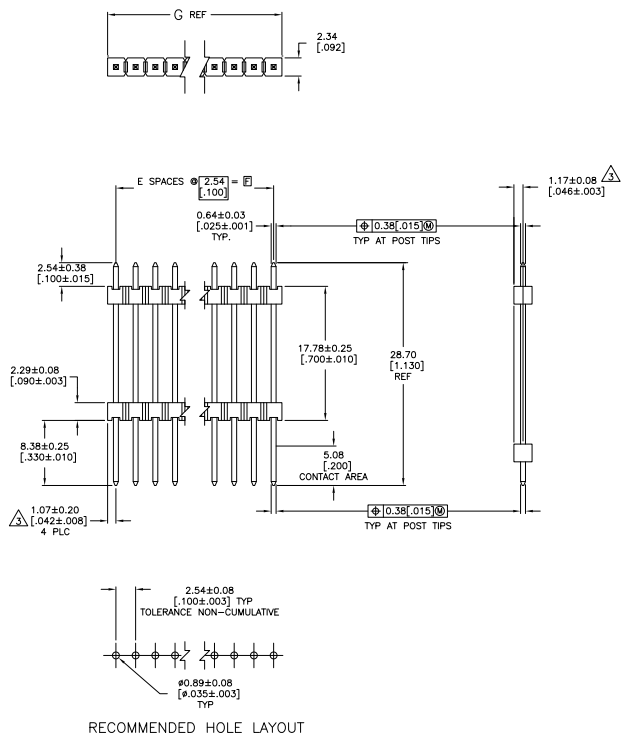

REV	DATE	DESCRIPTION	BY	CHK
AD	00	REVISED PER EDD-11-004820	11MR11	RK HMR

REV	DATE	DESCRIPTION	BY	CHK
101.19	99.06	39	40	4-146472-0
98.65	96.52	38	39	3-146472-9
96.11	93.98	37	38	3-146472-8
93.57	91.44	36	37	3-146472-7
91.03	88.90	35	36	3-146472-6
88.49	86.36	34	35	3-146472-5
85.95	83.82	33	34	3-146472-4
83.41	81.28	32	33	3-146472-3
80.87	78.74	31	32	3-146472-2
78.33	76.20	30	31	3-146472-1
75.79	73.66	29	30	3-146472-0
73.25	71.12	28	29	2-146472-9
70.71	68.58	27	28	2-146472-8
68.17	66.04	26	27	2-146472-7
65.63	63.50	25	26	2-146472-6
63.09	60.96	24	25	2-146472-5
60.55	58.42	23	24	2-146472-4
58.01	55.88	22	23	2-146472-3
55.47	53.34	21	22	2-146472-2
52.93	50.80	20	21	2-146472-1
50.39	48.26	19	20	2-146472-0
47.85	45.72	18	19	1-146472-9
45.31	43.18	17	18	1-146472-8
42.77	40.64	16	17	1-146472-7
40.23	38.10	15	16	1-146472-6
37.69	35.56	14	15	1-146472-5
35.15	33.02	13	14	1-146472-4
32.61	30.48	12	13	1-146472-3
30.07	27.94	11	12	1-146472-2
27.53	25.40	10	11	1-146472-1
24.99	22.86	9	10	1-146472-0
22.45	20.32	8	9	146472-9
19.91	17.78	7	8	146472-8
17.37	15.24	6	7	146472-7
14.83	12.70	5	6	146472-6
12.29	10.16	4	5	146472-5
9.75	7.62	3	4	146472-4
7.21	5.08	2	3	146472-3
4.67	2.54	1	2	146472-2
2.13	-	-	-	146472-1

PLATING: G F E NO. OF POSITIONS: PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. REV: 00 DATE: 11/11/11

TE Connectivity

HEADER ASSEMBLY, MOD II, STACKING, SINGLE ROW, 0.025 SQ. POST, UNSHROUDED

REVISED PER EDD-11-004820

DATE: 11/11/11 DRAWING NO: 100779

CUSTOMER DRAWING

THIS DRAWING IS UNPUBLISHED
 ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	CHK	APP
AD	00	SEE SHEET 1	-	-	-

NO.	REF	DESCRIPTION	NO.	REF	DESCRIPTION	NO.	REF	DESCRIPTION
101.19	99.06	39	40	9-146472-0				
[3.984]	[3.900]							
98.65	96.52	38	39	8-146472-9				
[3.884]	[3.800]							
96.11	93.98	37	38	8-146472-8				
[3.784]	[3.700]							
93.57	91.44	36	37	8-146472-7				
[3.684]	[3.600]							
91.03	88.90	35	36	8-146472-6				
[3.584]	[3.500]							
88.49	86.36	34	35	8-146472-5				
[3.484]	[3.400]							
85.95	83.82	33	34	8-146472-4				
[3.384]	[3.300]							
83.41	81.28	32	33	8-146472-3				
[3.284]	[3.200]							
80.87	78.74	31	32	8-146472-2				
[3.184]	[3.100]							
78.33	76.20	30	31	8-146472-1				
[3.084]	[3.000]							
75.79	73.66	29	30	8-146472-0				
[2.984]	[2.900]							
73.25	71.12	28	29	7-146472-9				
[2.884]	[2.800]							
70.71	68.58	27	28	7-146472-8				
[2.784]	[2.700]							
68.17	66.04	26	27	7-146472-7				
[2.684]	[2.600]							
65.63	63.50	25	26	7-146472-6				
[2.584]	[2.500]							
63.09	60.96	24	25	7-146472-5				
[2.484]	[2.400]							
60.55	58.42	23	24	7-146472-4				
[2.384]	[2.300]							
58.01	55.88	22	23	7-146472-3				
[2.284]	[2.200]							
55.47	53.34	21	22	7-146472-2				
[2.184]	[2.100]							
52.93	50.80	20	21	7-146472-1				
[2.084]	[2.000]							
50.39	48.26	19	20	7-146472-0				
[1.984]	[1.900]							
47.85	45.72	18	19	6-146472-9				
[1.884]	[1.800]							
45.31	43.18	17	18	6-146472-8				
[1.784]	[1.700]							
42.77	40.64	16	17	6-146472-7				
[1.684]	[1.600]							
40.23	38.10	15	16	6-146472-6				
[1.584]	[1.500]							
37.69	35.56	14	15	6-146472-5				
[1.484]	[1.400]							
35.15	33.02	13	14	6-146472-4				
[1.384]	[1.300]							
32.61	30.48	12	13	6-146472-3				
[1.284]	[1.200]							
30.07	27.94	11	12	6-146472-2				
[1.184]	[1.100]							
27.53	25.40	10	11	6-146472-1				
[1.084]	[1.000]							
24.99	22.86	9	10	6-146472-0				
[.984]	[.900]							
22.45	20.32	8	9	5-146472-9				
[.884]	[.800]							
19.91	17.78	7	8	5-146472-8				
[.784]	[.700]							
17.37	15.24	6	7	5-146472-7				
[.684]	[.600]							
14.83	12.70	5	6	5-146472-6				
[.584]	[.500]							
12.29	10.16	4	5	5-146472-5				
[.484]	[.400]							
9.75	7.62	3	4	5-146472-4				
[.384]	[.300]							
7.21	5.08	2	3	5-146472-3				
[.284]	[.200]							
4.67	2.54	1	2	5-146472-2				
[.184]	[.100]							
2.13	-	-	1	5-146472-1				
[.084]	-	-	-	-				
G	F	E	NO. OF POSITIONS:	PART NUMBER				

THIS DRAWING IS A CONTROLLED DOCUMENT. IF REVISIONS ARE MADE, THE ORIGINAL MUST BE DESTROYED.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.

TE Connectivity
 TE Connectivity
 TE Connectivity
 TE Connectivity

HEADER ASSEMBLY, MOD II,
 STACKING, SINGLE ROW,
 .025 SQ. PROT., UNPROTECTED

DATE: 00779
 DRAWING NO: 146472
 SHEET: 2 OF 2