

Video Output

Description

CX20095A is a bipolar IC designed as a driver of 75 Ω line (transmission and receiving line) used in the video signal system. It is comprised of a 75 Ω line driver, receiving amplifier and 6 dB amplifier for multi-purpose applications.

Features

- Low power supply voltage operation, Vcc = 5V (Typ.)
- Transmission/Receiving amplifier has a built-in sync chip clamp.
- Bilateral communication configuration is possible with one line.
- Driver amplifier and 6dB amplifier are provided with power-saving function.
- Simple superimpose is possible with the trans amplifier.

Structure

Bipolar silicon monolithic IC

Absolute Maximum Ratings (Ta = 25°C)


• Supply voltage	Vcc	17	V
• Operating temperature	Topr	- 10 to + 65	°C
• Storage temperature	Tstg	- 55 to + 150	°C
• Allowable power dissipation	PD	500	mW

Recommended Operating Condition


• Supply voltage	Vcc	4.8 to 5.2	V
------------------	-----	------------	---

Package Outline

Unit: mm

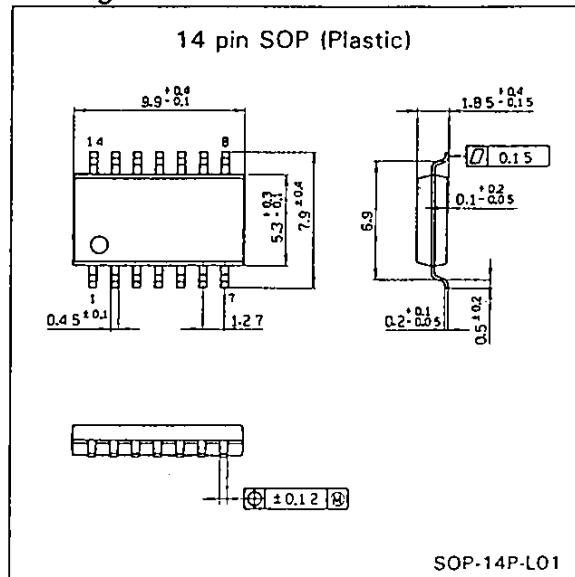

Block Diagram and Pin Configuration (Top view)

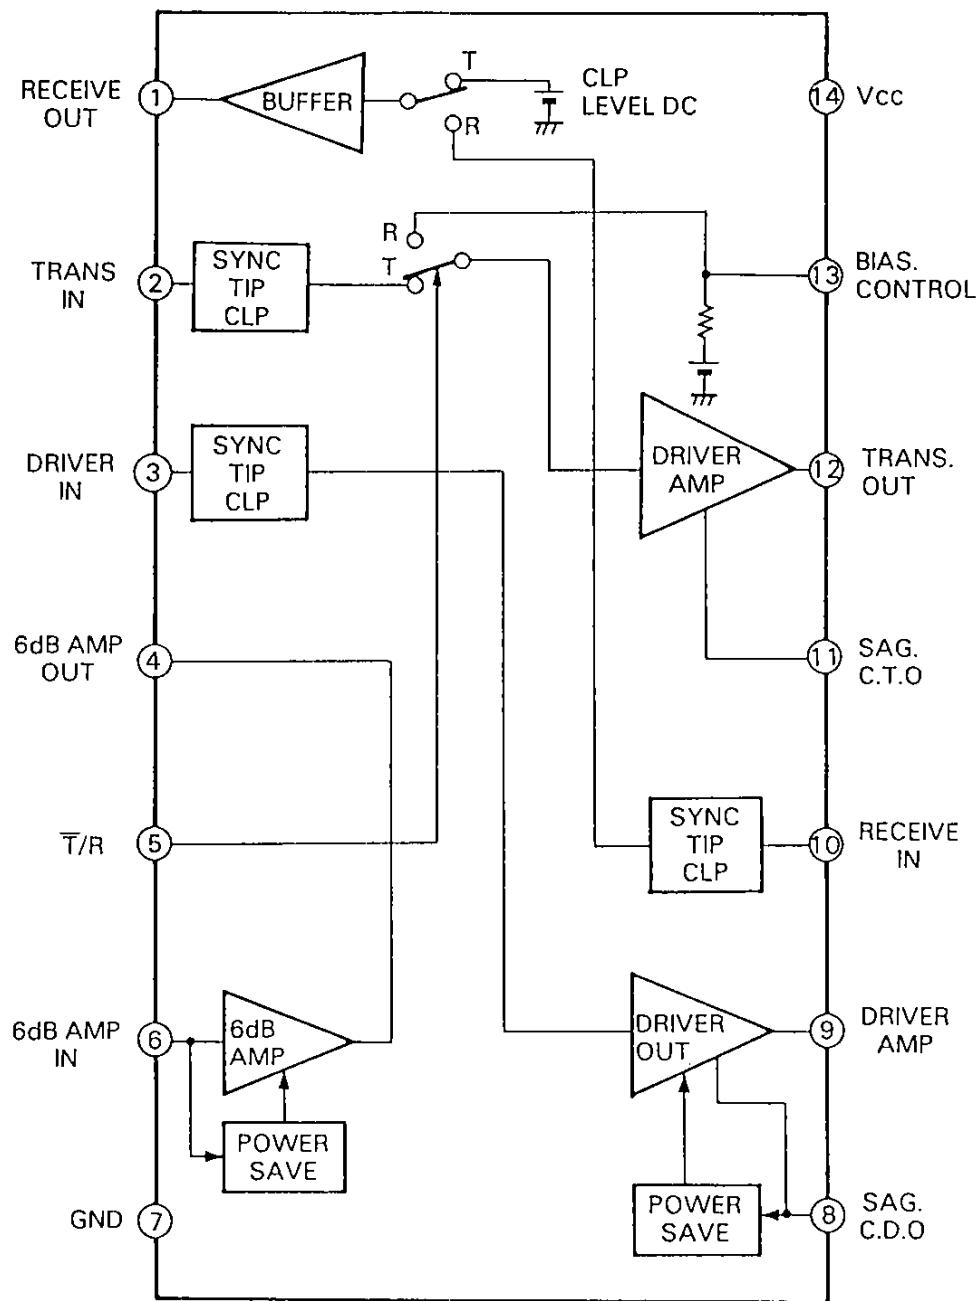

Pin Description

(See the Electrical Characteristics Test Circuit)
DC voltage when no signal is input, Ta = 25°C.


No.	Name	Voltage (V) standard value	Description
1	RECEIVE OUT	1.65	When pin 5 is at "H", the signal input from pin 10 is output with gain 0 dB. DC is output when pin 5 is at "L".
2	TRANS IN	1.28	Trans amplifier input: As sync chip clamp may result, a low impedance input is required.
3	DRIVER IN	1.28	Drive amplifier input: As sync chip clamp may result, a low impedance input is required.
4	6 dB AMP OUT	2.35	The signal input from pin 6 is output with gain 6 dB.
5	T/R	0	Mode switching pin Trans/Receive: Receive mode at "H" (over 4V) and Trans mode at "L" (less than 1V).
6	6 dB AMP IN	2.45	6 dB amplifier input: Input impedance more than approx. 10 kΩ, DC 2.4V
7	GND	0	
8	SAG.C.D.O.	1.29	The pin 9 sag is corrected by adding the sag component in the pin 9 output. Refer to Electrical Characteristics Test Circuit.
9	DRIVER OUT	1.08	Driver amplifier output: 75 Ω line drive is output. The signal input from pin 3 is output with gain 6 dB.
10	RECEIVE IN	1.74	Receiving amplifier input: As sync chip clamp may result, a low impedance input is required.
11	SAG.C.T.O.	1.30	The pin 12 sag is corrected by adding the sag component in the pin 12 output. Refer to Electrical Characteristics Test Circuit.
12	TRANS. OUT	1.10	Trans amplifier output: The signal input from pin 2 when pin 5 is at "L" is output to the 75 Ω line with a gain of 6 dB. A DC voltage determined at pin 13 is output when pin 5 is at "H".
13	BIAS. CONTROL	2.13	When pin 5 is at "H", its voltage is varied to vary the pin 12 output (DC) in turn. By linking with pin 5, simple superimpose can be possible in the pin 12 output. (In this case, the pin 1 output is affected.)
14	Vcc	5.0	+ 5.0V

Electrical Characteristics

T_a = 25°C, V_{cc} = 5.0V, See the Electrical Characteristics Test Circuit


No.	Test item	Test point	Input condition	Test condition												Remark	Min.	Typ.	Max.	Unit		
				1	2	3	4	5	6	7	8	9	10	11	12	13	14					
1	Consumption current	I															I ₀	7.5	11	15	mA	
2	Power saving	I							ON	ON							I _{0.5}	4.5	6.5	9	mA	
3	Trans amp gain	V	500kHz, 1Vp-p	ON					ON				ON				E ₁ : Less than 1V (for 1Vp-p input)	G _r	-0.5	0	+0.5	dB
4	Trans dynamic range	V	16kHz, Square wave	ON					ON				ON				E ₁ : Less than 1V (input equivalent)	D _r	1.4			Vp-p
5-a	Trans bias control	V											ON				E ₁ : Measured value over AV = A	V _{1.3}	2.0	2.15	2.3	V
5-b	Trans bias control	V											ON	ON			E ₁ : Measured value over AV = 8	V _{1.2}	2.65	2.75	2.9	V
5-c	Trans bias control	V	E ₂ = 2.3V										ON	ON	ON		20 log = $\frac{(\text{Measuring value}) - B}{E_2 - A}$ (E ₂ = 2.3V)	G _{ac}	5.3	6.0	6.8	dB
6	Receiver amp gain	V	500kHz, 1Vp-p			ON	ON						ON	ON			E ₁ : Over 4V (for 1Vp-p input)	G _r	-0.5	0	+0.5	dB
7	Receiver dynamic range	V	16kHz, Square wave			ON	ON						ON				E ₁ : Over 4V (input equivalent)	D _r	1.7			Vp-p
8	Driver amp gain	V	500kHz, 1Vp-p	ON					ON								For input 1Vp-p	G _d	-0.5	0	+0.5	dB
9	Driver dynamic range	V	16kHz, Square wave	ON					ON								Input equivalent	D _d	1.4			Vp-p
10	6dB amp gain	V	500kHz, 1Vp-p					ON	ON								For input 1Vp-p	G _a	5.5	6.0	6.5	dB
11	6dB dynamic range	V	16kHz, 1.4Vp-p					ON	ON								1.4Vp-p	D _a	2.6	2.8	3.0	Vp-p
12	Trans receiving leakage	V	4MHz 0.7Vp-p			ON				ON			ON				E ₁ : Over 4V (for 0.7Vp-p) (4MHz component)	L _{TR}			-40	dB

Electrical Characteristics Test Circuit

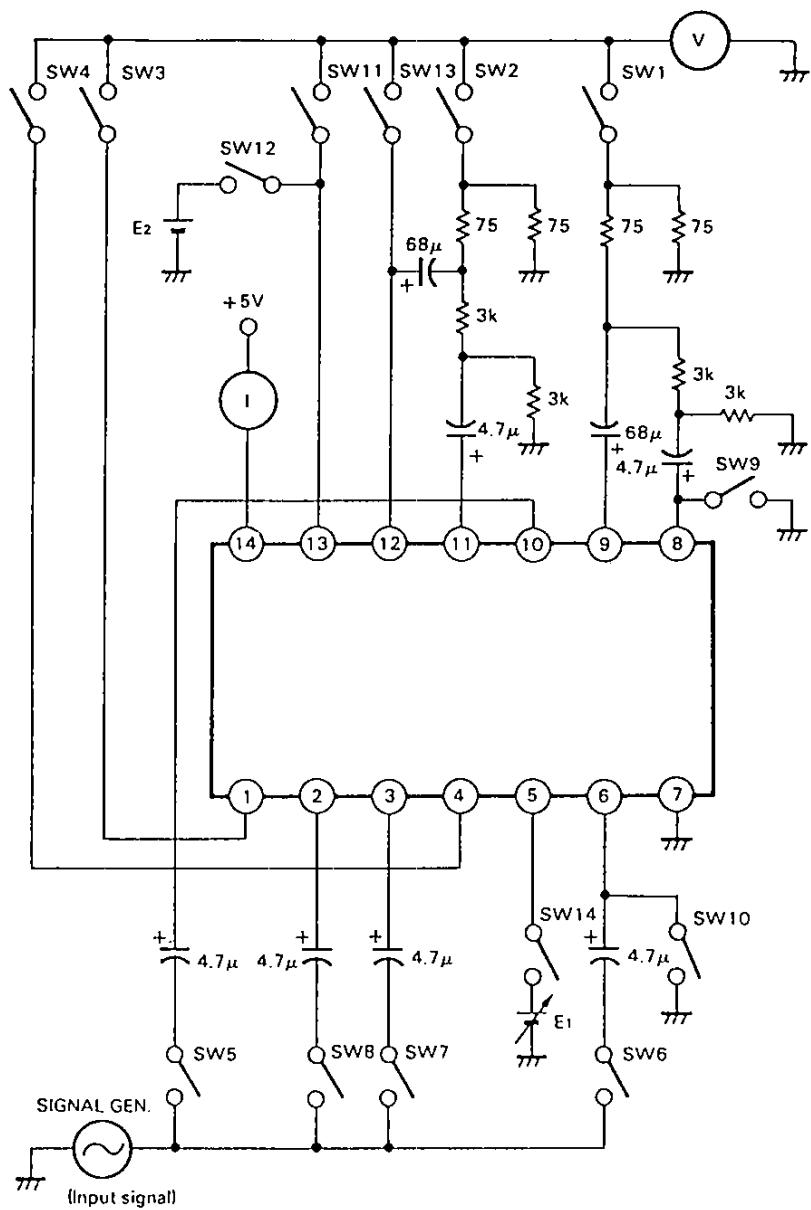


Application Circuit

Transmission and receiving reference circuit (Trans amplifier, Receive amplifier)




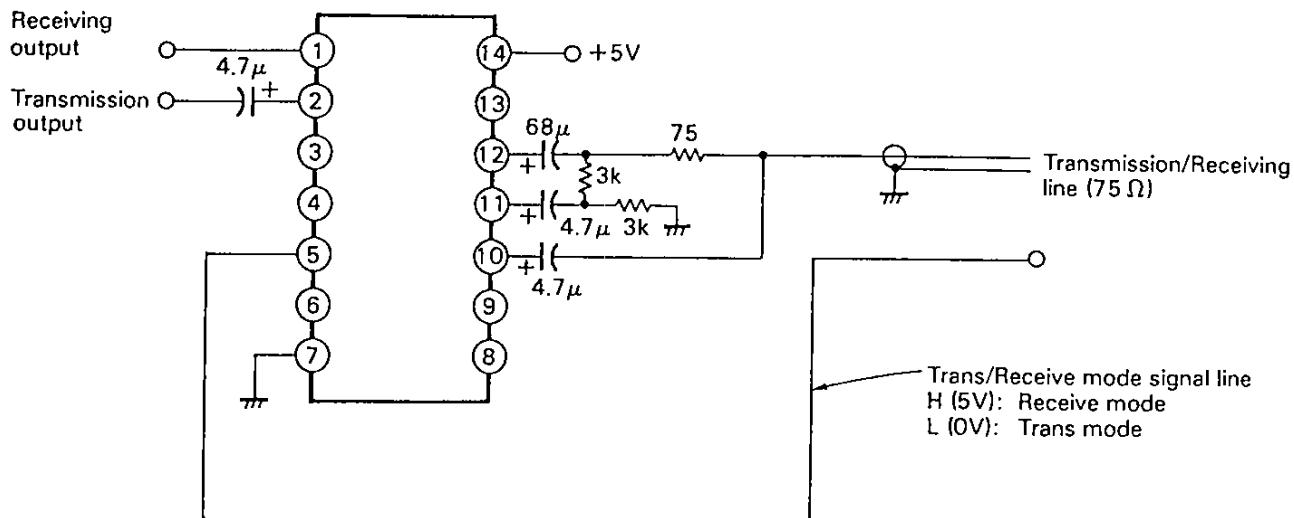


Driver amplifier, 6 dB amplifier external reference circuit

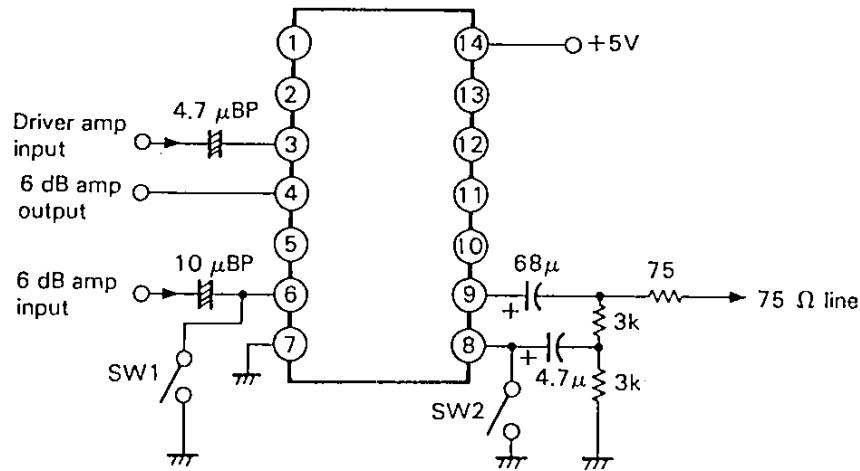

SW1: 6 dB amp power saving mode when switched on.

SW2: Driver amp power saving mode when switched on.

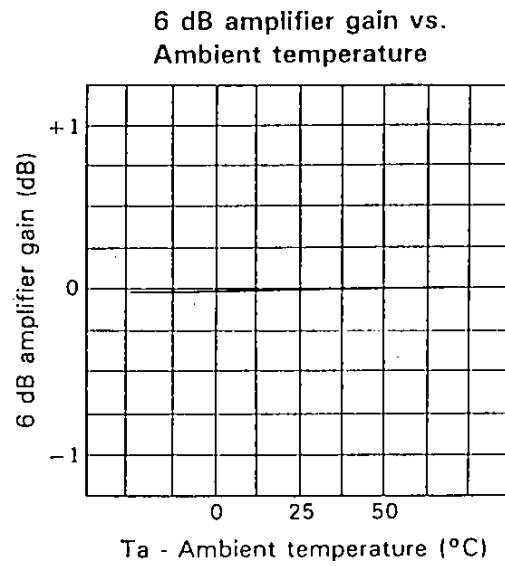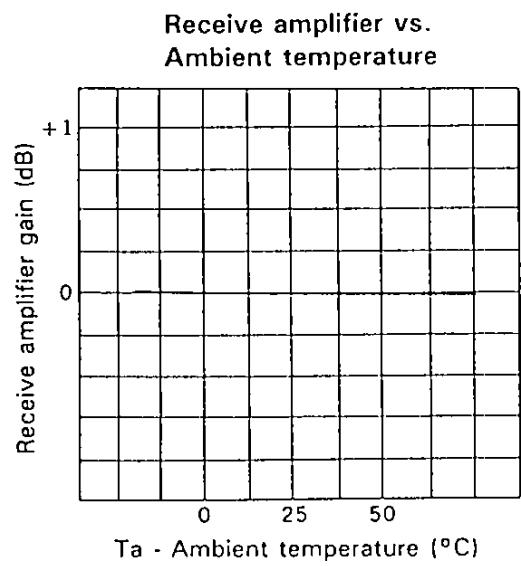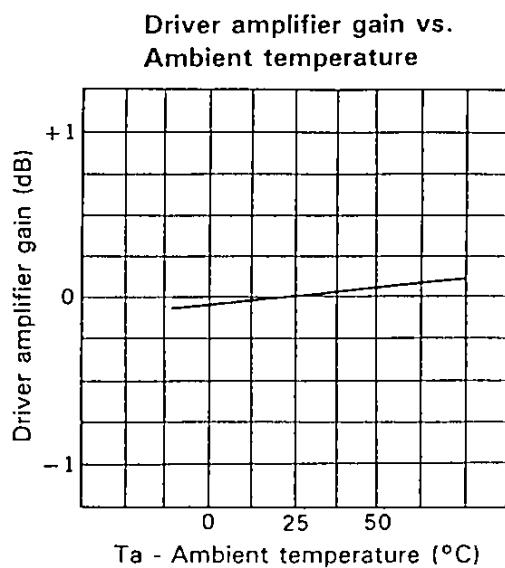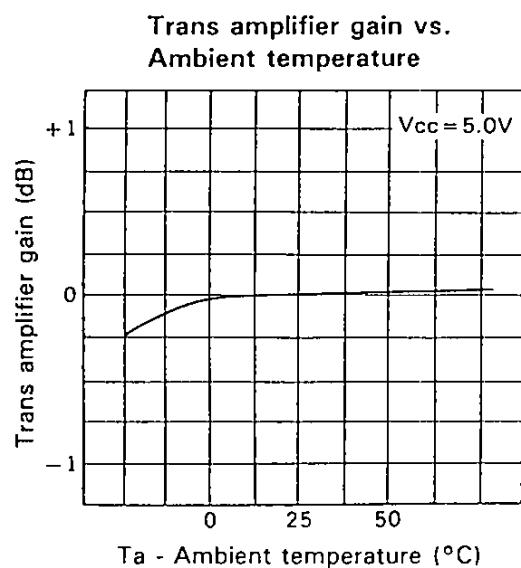

Note) Gain at 25°C is assumed to be 0 dB.