


REV	DATE	DESCRIPTION	BY	CHK	APP
AD 00		REVISED PER ECO-11-004820			

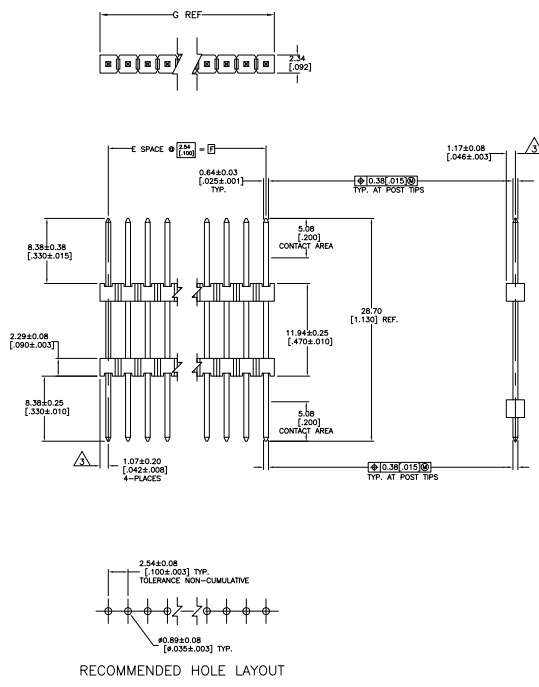

- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
 - TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
 - FINISH: 0.000381 [0.000015] GOLD ON CONTACT AREA, ALL OVER 0.00127 [0.000050] NICKEL ENTIRE POST.

REV	DATE	DESCRIPTION	BY	CHK	APP
AD 00		REVISED PER ECO-11-004820			
39	40	4-146473-0			
38	39	3-146473-9			
37	38	3-146473-8			
36	37	3-146473-7			
35	36	3-146473-6			
34	35	3-146473-5			
33	34	3-146473-4			
32	33	3-146473-3			
31	32	3-146473-2			
30	31	3-146473-1			
29	30	3-146473-0			
28	29	2-146473-9			
27	28	2-146473-8			
26	27	2-146473-7			
25	26	2-146473-6			
24	25	2-146473-5			
23	24	2-146473-4			
22	23	2-146473-3			
21	22	2-146473-2			
20	21	2-146473-1			
19	20	2-146473-0			
18	19	1-146473-9			
17	18	1-146473-8			
16	17	1-146473-7			
15	16	1-146473-6			
14	15	1-146473-5			
13	14	1-146473-4			
12	13	1-146473-3			
11	12	1-146473-2			
10	11	1-146473-1			
9	10	1-146473-0			
8	9	146473-9			
7	8	146473-8			
6	7	146473-7			
5	6	146473-6			
4	5	146473-5			
3	4	146473-4			
2	3	146473-3			
1	2	146473-2			
-	1	146473-1			

THIS DRAWING IS A CONTROLLED DOCUMENT.

TE Connectivity
 TE Connectivity
 TE Connectivity

HEADER ASSEMBLY, MOD II, STACKING, SINGLE ROW, .025 SQ POST, UNSHROUDED

DATE: 10/07/79
 DRAWING NO: 146473
 CUSTOMER DRAWING

NO. OF POSITIONS: 40
 PART NUMBER: 4-146473-0