


REV	DATE	DESCRIPTION	BY	CHK	APP
AD 39		REVISED PER ECD-11-004820			

- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
 - TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- ▲ THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
 ▲ HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
 ▲ FINISH: 0.000381 [0.00015] GOLD ON CONTACT AREA, ALL OVER 0.00127 [0.00050] NICKEL ENTIRE POST.

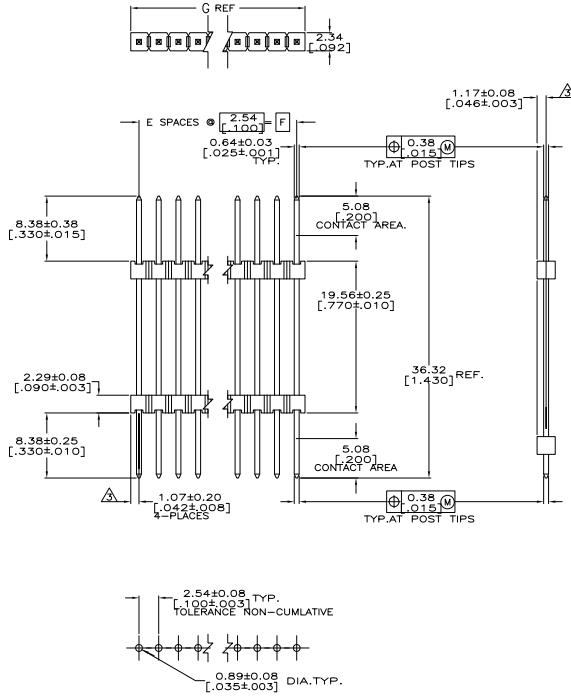

RECOMMENDED HOLE LAYOUT

39	40	4-146482-0		
38	39	3-146482-9		
37	38	3-146482-8		
36	37	3-146482-7		
35	36	3-146482-6		
34	35	3-146482-5		
33	34	3-146482-4		
32	33	3-146482-3		
31	32	3-146482-2		
30	31	3-146482-1		
29	30	3-146482-0		
28	29	2-146482-9		
27	28	2-146482-8		
26	27	2-146482-7		
25	26	2-146482-6		
24	25	2-146482-5		
23	24	2-146482-4		
22	23	2-146482-3		
21	22	2-146482-2		
20	21	2-146482-1		
19	20	2-146482-0		
18	19	1-146482-9		
17	18	1-146482-8		
16	17	1-146482-7		
15	16	1-146482-6		
14	15	1-146482-5		
13	14	1-146482-4		
12	13	1-146482-3		
11	12	1-146482-2		
10	11	1-146482-1		
9	10	1-146482-0		
8	9	146482-9		
7	8	146482-8		
6	7	146482-7		
5	6	146482-6		
4	5	146482-5		
3	4	146482-4		
2	3	146482-3		
1	2	146482-2		
-	1	146482-1		
G	F	E	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. IT IS THE PROPERTY OF TE CONNECTIVITY. IT IS TO BE KEPT IN CONFIDENCE AND NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM.

TE Connectivity
 TE CONNECTIVITY
 TE CONNECTIVITY

HEATER ASSEMBLY, MOD II, STACKING, SINGLE ROW, 0.025 SQ. POST, UNSHROUDED

DATE: 10/07/79
 DRAWING NO: G-146482
 CUSTOMER DRAWING

SIZE: 4:1
 SHEET: 1 OF 1
 P. 1