


THIS DRAWING IS UNAPPROVED
 UNLESS NOTED OTHERWISE
 ALL RIGHTS RESERVED

REV	DATE	BY	CHK	DESCRIPTION	DATE	BY	CHK
AD 00				REVISED PER EDD-11-004820	11MAR11	RK	HMR

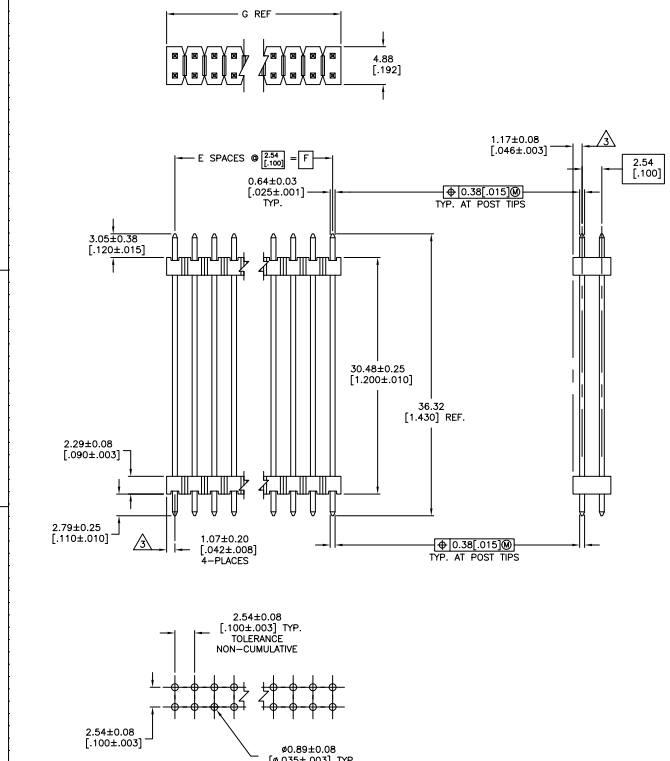

RECOMMENDED HOLE LAYOUT

- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS.
 - TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- △ THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING.
 - △ HOUSING, FLAME RETARDANT THERMOPLASTIC, COLOR, BLACK.
 - △ FINISH: 0.00254-0.00508 [0.00100-0.00200] BRIGHT TIN-LEAD OVER 0.00127[0.000050] NICKEL ENTIRE POST.
 - △ FINISH: 0.00254-0.00508 [0.00100-0.00200] MATTE TIN OVER 0.00127[0.000050] NICKEL ENTIRE POST.

PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER
△	101.19	99.06	39	80	9-146508-0
△	3.984	3.900	38	78	8-146508-9
△	3.884	3.800	37	76	8-146508-8
△	96.11	93.98	36	74	8-146508-7
△	93.57	91.44	35	72	8-146508-6
△	88.84	86.70	34	70	8-146508-5
△	85.95	83.82	33	68	8-146508-4
△	83.41	81.28	32	66	8-146508-3
△	80.87	78.74	31	64	8-146508-2
△	78.33	76.20	30	62	8-146508-1
△	75.79	73.66	29	60	8-146508-0
△	72.25	71.12	28	58	7-146508-9
△	68.71	66.04	27	56	7-146508-8
△	65.63	63.50	25	52	7-146508-6
△	63.09	60.96	24	50	7-146508-5
△	60.55	58.42	23	48	7-146508-4
△	58.01	55.88	22	46	7-146508-3
△	55.47	53.34	21	44	7-146508-2
△	52.93	50.80	20	42	7-146508-1
△	50.39	48.26	19	40	7-146508-0
△	47.85	45.72	18	38	6-146508-9
△	45.31	43.18	17	36	6-146508-8
△	42.77	40.64	16	34	6-146508-7
△	40.23	38.10	15	32	6-146508-6
△	37.69	35.56	14	30	6-146508-5
△	35.15	33.02	13	28	6-146508-4
△	32.61	30.48	12	26	6-146508-3
△	30.07	27.94	11	24	6-146508-2
△	27.53	25.40	10	22	6-146508-1
△	24.99	22.86	9	20	6-146508-0
△	22.45	20.32	8	18	5-146508-9
△	19.91	17.78	7	16	5-146508-8
△	17.37	15.24	6	14	5-146508-7
△	14.83	12.70	5	12	5-146508-6
△	12.29	10.16	4	10	5-146508-5
△	9.75	7.62	3	8	5-146508-4
△	7.21	5.08	2	6	5-146508-3
△	4.67	2.54	1	4	5-146508-2
△	2.13	0.00	-	2	5-146508-1

PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER
△	101.19	99.06	39	80	4-146508-0
△	3.984	3.900	38	78	3-146508-9
△	3.884	3.800	37	76	3-146508-8
△	96.11	93.98	36	74	3-146508-7
△	93.57	91.44	35	72	3-146508-6
△	88.84	86.70	34	70	3-146508-5
△	85.95	83.82	33	68	3-146508-4
△	83.41	81.28	32	66	3-146508-3
△	80.87	78.74	31	64	3-146508-2
△	78.33	76.20	30	62	3-146508-1
△	75.79	73.66	29	60	3-146508-0
△	72.25	71.12	28	58	2-146508-9
△	68.71	66.04	27	56	2-146508-8
△	65.63	63.50	25	52	2-146508-6
△	63.09	60.96	24	50	2-146508-5
△	60.55	58.42	23	48	2-146508-4
△	58.01	55.88	22	46	2-146508-3
△	55.47	53.34	21	44	2-146508-2
△	52.93	50.80	20	42	2-146508-1
△	50.39	48.26	19	40	2-146508-0
△	47.85	45.72	18	38	1-146508-9
△	45.31	43.18	17	36	1-146508-8
△	42.77	40.64	16	34	1-146508-7
△	40.23	38.10	15	32	1-146508-6
△	37.69	35.56	14	30	1-146508-5
△	35.15	33.02	13	28	1-146508-4
△	32.61	30.48	12	26	1-146508-3
△	30.07	27.94	11	24	1-146508-2
△	27.53	25.40	10	22	1-146508-1
△	24.99	22.86	9	20	1-146508-0
△	22.45	20.32	8	18	146508-9
△	19.91	17.78	7	16	146508-8
△	17.37	15.24	6	14	146508-7
△	14.83	12.70	5	12	146508-6
△	12.29	10.16	4	10	146508-5
△	9.75	7.62	3	8	146508-4
△	7.21	5.08	2	6	146508-3
△	4.67	2.54	1	4	146508-2
△	2.13	0.00	-	2	146508-1

THIS DRAWING IS A CONTROLLED DOCUMENT. REV. 1 (12-20-04) DATE 12-20-04

TE Connectivity
 TE Connectivity
 TE Connectivity

HEADERS ASSEMBLY, MOD II, STACKING, DOUBLE ROW, 0.025 SQ. POST, UNSHROUDED

SIZE: 4.1

CUSTOMER DRAWING: A100779G-146508