

TABLE 1			
LEAD STYLE	TERMINAL	OVERALL LENGTH	
		INCHES	MILLIMETERS
-01	T-1S13-20-X-2	.3228	8.2 mm
-02	T-1S13-02-X-2	.3770	9.6 mm
-03	T-1S13-03-X-2	.5347	13.6 mm
-04	T-1S13-06-X-2	.5550	14.1 mm
-05	T-1S13-09-X-2	.5940	15.10 mm
-06	T-1S13-10-X-2	.6730	17.10 mm
-07	T-1S13-11-X-2	.7510	19.10 mm
-08	T-1S13-12-X-2	.8300	21.10 mm
-09	T-1S13-13-X-2	.4560	11.60 mm
-10	T-1S13-14-X-2	.6140	15.60 mm
-11	T-1S13-05-X-2	.3970	10.08 mm
-12	T-1S13-16-X-2	1.110	28.19 mm

NOTE: LEAD STYLE -08 & -12 NOT AVAILABLE IN -T, -Q-5 & 6 ROW OPTION.



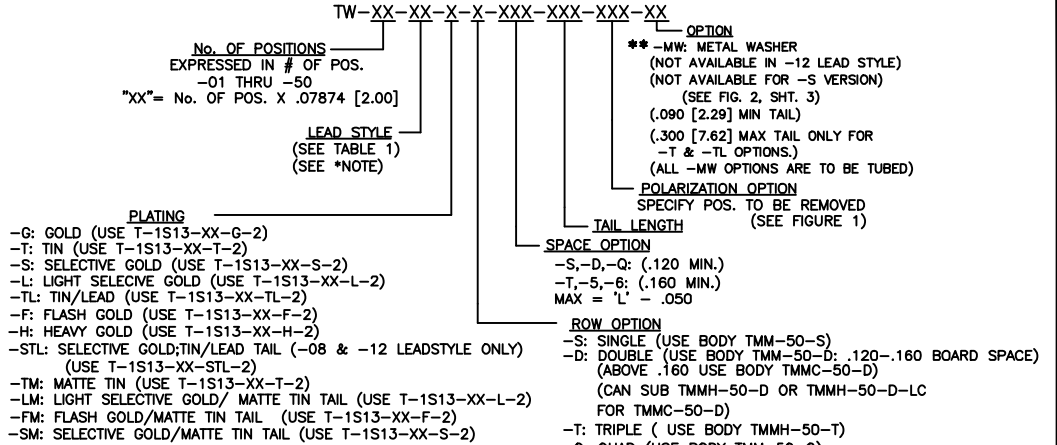


FIG. 1


SCALE: .75x
(SEE NOTE 6)




SINGLES




DOUBLES




TRIPLES



QUADS

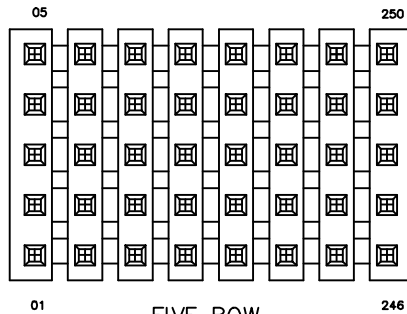

FIVE ROW

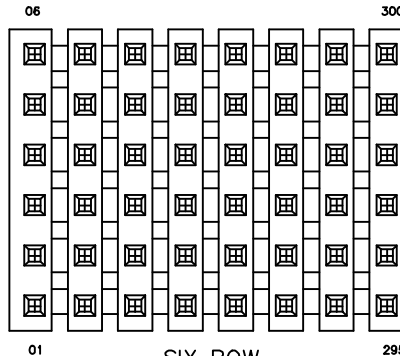

SIX ROW

FIG. 1

**** - MW OPTION, DO NOT DESIGN IN. SAMTEC WILL ONLY SUPPORT EXISTING BUSINESS 2/07/02.**

NOTES:

- 1.) MAX ALLOWABLE BOW: .005 IN/IN AFTER ASSEMBLY.
- 2.) MAX PIN ROTATION IN BODY: 2°.
- 3.) PUSHOUT FORCE SHALL BE 1 LB. MIN.
- 4.) (C) REPRESENTS A CRITICAL DIMENSION FOR STATISTICAL PROCESS CONTROL USE.
- 5.) ON -S, -L, -F, & -STL PLATING, GOLD TO GO IN CONTACT AREA WHICH IS OPPOSITE THE GIVEN TAIL LENGTH. FOR -G & -H, HEAVY GOLD TO GO IN CONTACT AREA WHICH IS OPPOSITE THE GIVEN TAIL LENGTH. NOTE DOES NOT APPLY TO -T & -TL PLATING.
- 6.) TOP VIEW (VIEW OF CONTACT AREA, OPPOSITE VIEW OF CUSTOMER SPECIFIED TAIL (SEE PAGE 2)).
- 7.) .020 MAX FLASH
- 8.) NOTE DELETED

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC INC. AND SHALL NOT BE REPRODUCED OR TRANSMITTED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC INC.



EXISPROD\ASSEMBLY\2MM
TW-ASM

520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150
PHONE (812) 944-6733 P.O. BOX 1147
CODE 55322

MADE BY: MATT CARTER 6-19-98

TW-XX-XX-X-X-XXX-XXX-XXX-XX
SHEET 1 OF 3