



# SAW Components

Data Sheet B4832





SAW Components

B4832

Low-Loss Filter for Mobile Communication

400,0 MHz

Data Sheet




SMD ceramic package QCC8C

**Features**

- Low-loss IF filter for mobile telephone
- Channel selection in GSM/PCN systems
- Ceramic SMD package

**Terminals**


- Gold-plated Ni

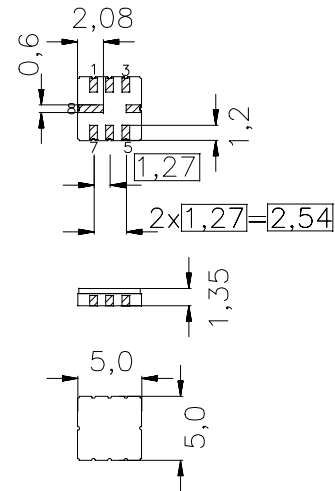

Dimensions in mm, approx. weight 0,07 g

**Pin configuration**

- 1 Input
- 2 Input ground or balanced input
- 5 Output
- 6 Output ground or balanced output
- 7 External coupling coil
- 4,8 Case - ground
- 3 To be grounded

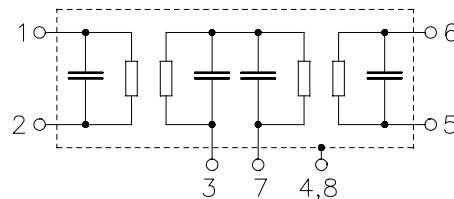

Type	Ordering code	Marking and Package according to	Packing according to
B4832	B39401-B4832-U310	C61157-A7-A53	F61074-V8070-Z000

Electrostatic Sensitive Device (ESD)

**Maximum ratings**

Operable temperature range	$T$	- 40 / +85	°C	Machine Model, 10 pulses
Storage temperature range	$T_{stg}$	- 40 / +85	°C	
ESD voltage	$V_{ESD}^*$	100	V	
DC voltage	$V_{DC}$	0	V	
Source power	$P_s$	10	dBm	

\*-acc. to JESD22-A115A(Machine Model), 10 negative & 10 positive pulses


**SAW Components**
**B4832**
**Low-Loss Filter for Mobile Communication**
**400,0 MHz**
**Data Sheet**

**Characteristics**


Operating temperature range:	$T = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$
Terminating source impedance:	$Z_S = 600\ \Omega \parallel 90\ \text{nH}$
Terminating load impedance:	$Z_L = 600\ \Omega \parallel 90\ \text{nH}$
External Coil:	$L_c = 47\ \text{nH}$

		min.	typ.	max.	
<b>Nominal frequency</b>	$f_N$	—	400,0	—	MHz
<b>Maximum insertion attenuation</b> (excluding loss in matching elements)	$f_N-0,083 \dots f_N+0,083$	—	3,7	6,0	dB
(including loss in matching elements)	$f_N-0,083 \dots f_N+0,083$	—	5,2	7,5	dB
	$\alpha_{\max}$				
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$				
	$f_N-0,083 \dots f_N+0,083$	—	1,0	2,0	dB
<b>Relative attenuation (relative to <math>\alpha_{\max}</math>)</b>	$\alpha_{\text{rel}}$				
	$f_N-100,0 \dots f_N-1,5$	35,0	48,0	—	dB
	$f_N-1,5 \dots f_N-0,8$	20,0	51,0	—	dB
	$f_N-0,8 \dots f_N-0,6$	10,0	45,0	—	dB
	$f_N-0,6 \dots f_N-0,4$	7,0	15,0	—	dB
	$f_N+0,4 \dots f_N+0,6$	7,0	15,0	—	dB
	$f_N+0,6 \dots f_N+0,8$	10,0	30,0	—	dB
	$f_N+0,8 \dots f_N+1,5$	20,0	40,0	—	dB
	$f_N+1,5 \dots f_N+100,0$	35,0	54,0	—	dB
<b>Group delay ripple (p-p)</b>	$\Delta\tau$				
	$f_N-0,083 \dots f_N+0,083$	—	0,55	1,0	$\mu\text{s}$
<b>Temperature coefficient of frequency <sup>1)</sup></b>	$TC_f$	—	-0,036	—	ppm/K <sup>2</sup>
<b>Frequency inversion point</b>	$T_0$	—	20	—	$^{\circ}\text{C}$


<sup>1)</sup> Temperature dependence of  $f_c$ :  $f_c(T) = f_c(T_0)(1 + TC_f(T - T_0)^2)$



Transfer function (including losses of matching elements and balun):

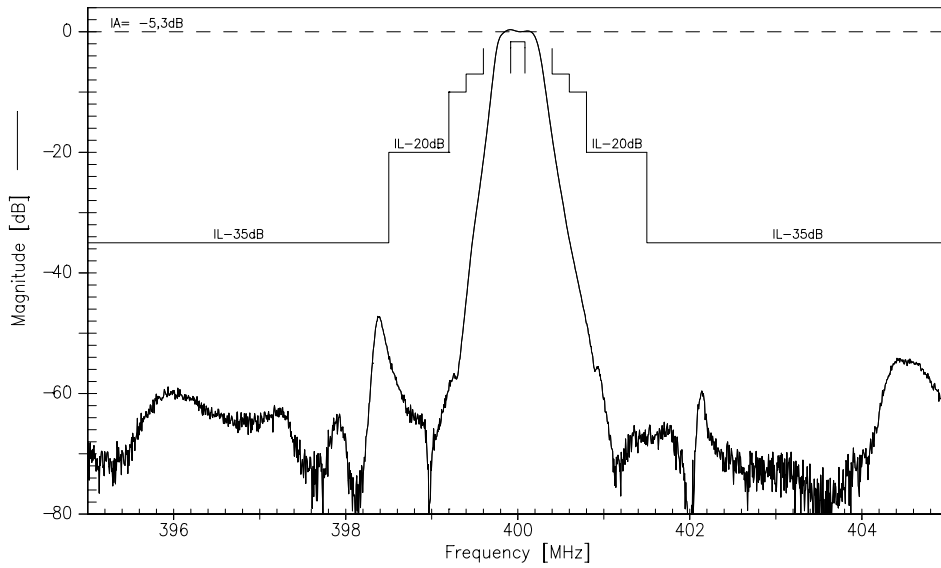


Transfer function (pass band, including losses of matching elements and balun):

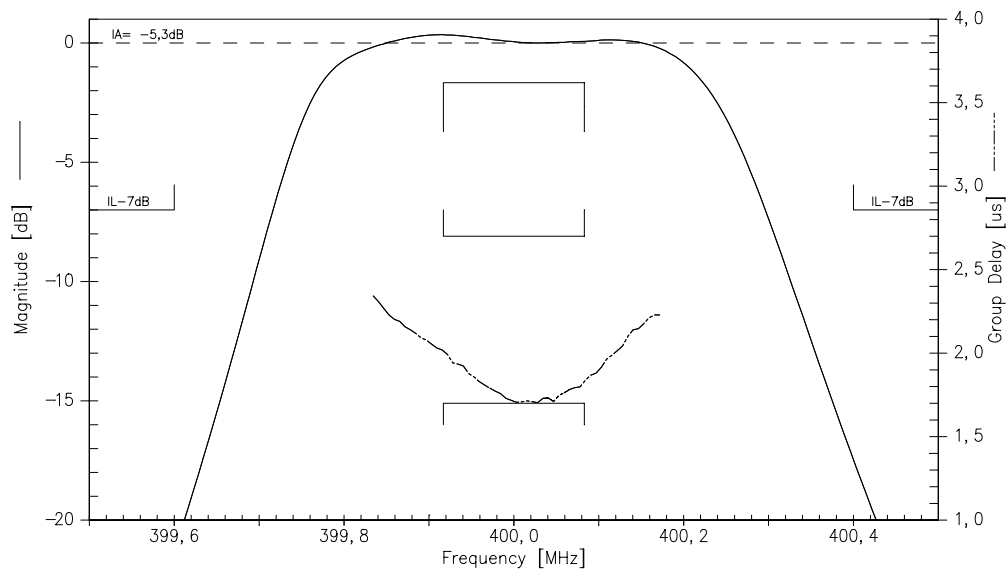




Test matching network to 50 Ω (element values depend on PCB layout, balun TOKO B5FL):

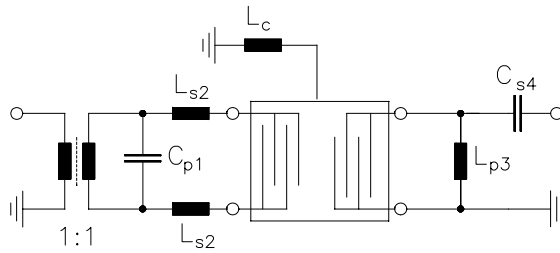

- $C_{p1} = 4,7\text{pF}$
- $L_{s2} = 39\text{nH}$
- $L_c = 47\text{nH}$
- $L_{p3} = 27\text{nH}$
- $C_{s4} = 2,7\text{pF}$

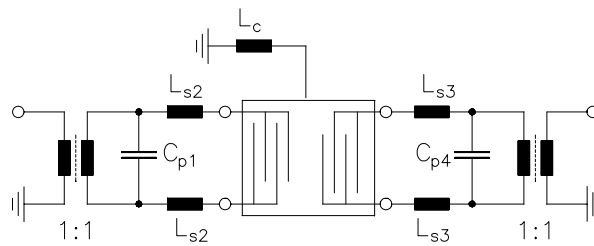

- $C_{p1} = 4,7\text{pF}$
- $L_{s2} = 39\text{nH}$
- $L_c = 47\text{nH}$
- $L_{s3} = 39\text{nH}$
- $C_{p4} = 4,7\text{pF}$



**SAW Components**

**B4832**

**Low-Loss Filter for Mobile Communication**

**400,0 MHz**

Data Sheet



**Published by EPCOS AG**

**Surface Acoustic Wave Components Division, SAW MC PD**

**P.O. Box 80 17 09, 81617 Munich, GERMANY**

© EPCOS AG 2004. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.