

REVISION AH



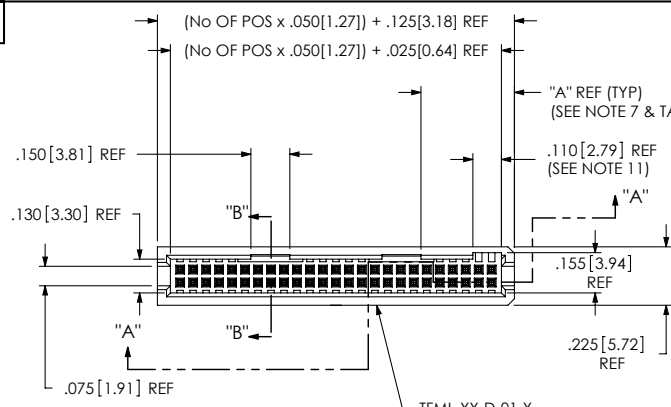


FIG. 1  
-01: THROUGH HOLE

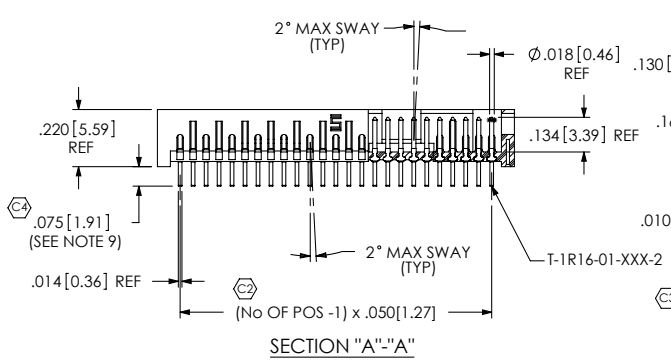


SECTION "A"-"A"

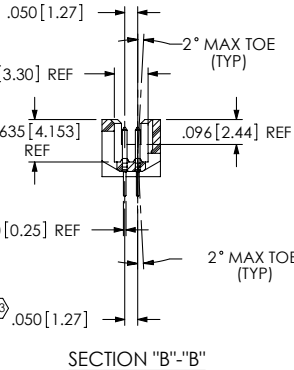

SECTION "B"-"B"


TFML-1XX-XX-XXX-D-XX

- No OF POSITIONS**  
-05 -07 -10 THRU -50 (PER ROW)
- LEAD STYLE**  
-01: THROUGH HOLE (SEE FIG. 1)  
-02: SURFACE MOUNT (SEE FIG.3, SHT 2)
- PLATING SPECIFICATION**  
-S: SELECTIVE (USE T-1R16-XX-S-X)  
-L: LIGHT SELECTIVE (USE T-1R16-XX-L-X)  
-F: FLASH GOLD (USE T-1R16-XX-F-X)  
-P: GOLD FLASH PALLADIUM NICKEL (USE T-1R16-XX-P-X)  
-H: HEAVY GOLD (USE T-1R16-XX-H-X)  
-FM: SELECTIVE FLASH GOLD, MATTE TIN TAIL (USE T-1R16-XX-F-X)  
-LM: SELECTIVE LIGHT GOLD, MATTE TIN TAIL (USE T-1R16-XX-L-X)  
-SM: SELECTIVE HEAVY GOLD, MATTE TIN TAIL (USE T-1R16-XX-S-X)  
-STL: SELECTIVE TIN LEAD (USE T-1R16-XX-STL-X)
- OPTION**  
-A: ALIGNMENT PIN (USE TFML-XX-D-01-A) (SEE FIG. 7, SHT 3)  
-LC: LOCKING CLIP (USE LC-05-TM) (SEE FIG. 9, SHT 3, N/A ON -RA OPTION)  
-P: PICK & PLACE PAD (USE PPP-04) (AVAILABLE IN ALL POSITIONS, N/A ON -RA OPTION, SEE FIG. 5, SHT 2)  
-RA: RIGHT ANGLE (LEAD STYLE -01 ONLY) (SEE FIG. 4, SHT 2)  
-TR: TAPE & REEL (SEE FIG. 2)  
-SA: STAKED ALIGNMENT PIN (USE SM-A5) (SEE FIG. 8, SHT 3)  
-K: POLYAMIDE FILM (USE K-500-300) (SEE FIG. 6, SHT 2) (N/A ON -RA)  
-SN: SOLDER NAIL (USE TFML-XX-D-01-SN & WT-27-01-T) (SEE FIG. 10, SHEET 4) (AVAILABLE ON -02 LEAD STYLE ONLY)
- ROW SPECIFICATION**  
-D: DOUBLE ROW



- NOTES:
- ⊕ REPRESENTS A CRITICAL DIMENSION.
  - COPLANARITY: POSITIONS -10 THRU -26: .004[0.10] POSITIONS -27 THRU -50: .006[0.15].
  - MANUFACTURING IN-PROCESS DIMENSION DESIGNED TO ACHIEVE FINISHED ASSEMBLY.
  - MINIMUM PUSHOUT FORCE: 1.0 LB [4.4 N].
  - MAXIMUM ALLOWABLE BOW: .004 INCH/INCH [0.10 MM/MM] AFTER ASSEMBLY.
  - MEASURED FROM BEND.
  - POSITIONS -05 AND -07 WILL ONLY HAVE ONE CLIP AT DIMENSION SHOWN; POSITIONS -10 THROUGH -24 WILL HAVE ONLY ONE CLIP AT DIMENSION SHOWN; POSITIONS -25 THROUGH -34 WILL HAVE TWO CLIPS AT DIMENSION SHOWN; POSITIONS -35 THROUGH -50 WILL HAVE THREE CLIPS: TWO AT DIMENSION SHOWN & ONE CENTERED ON INSULATOR.
  - NOTE DELETED.
  - .003[0.08] MAXIMUM TERMINAL BURR
  - .005[0.13] MAXIMUM HEIGHT VARIATION BETWEEN ANY TWO PINS.
  - DIMENSION IS NOT APPLICABLE FOR -05 AND -07 POSITION.

NO OF POS.	"A"
EVEN	.310
ODD (EXCL. -05,-07 POS)	.360
-05,-07	.113

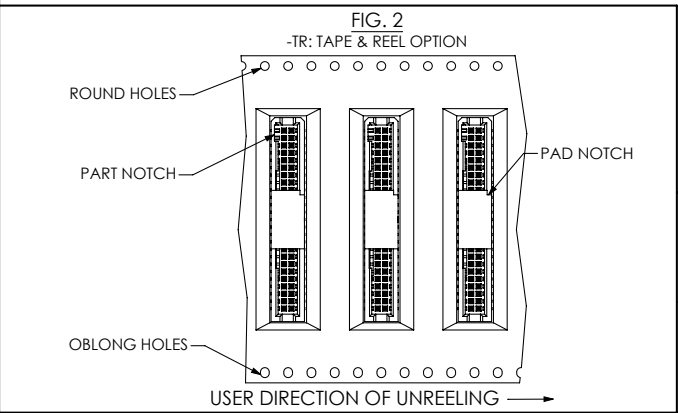

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE:  
DECIMALS .XX: ±.01 .XXX: ±.005 .XXXX: ±.0020  
ANGLES 2°

PROPRIETARY NOTE  
THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.

MATERIAL: VECTRA E130I, COLOR: BLACK CONTACT: PHOS BRONZE, THICKNESS: .018

DO NOT SCALE DRAWING SHEET SCALE: 1.75:1


F:\DWG\MISC\MKTG\TFML-1XX-XX-XXX-D-XX-MKT.SLDDRW




DESCRIPTION: .050 SHROUDED TERMINAL ASSEMBLY  
DWG. NO. TFML-1XX-XX-XXX-D-XX  
BY: DEANP 4/8/99 SHEET 1 OF 4

REVISION AH


**FIG. 3**  
 -02: SURFACE MOUNT  
 (SHOWN: TFML-125-02-XXX-D)  
 (SAME AS FIG. 1, UNLESS OTHERWISE STATED)

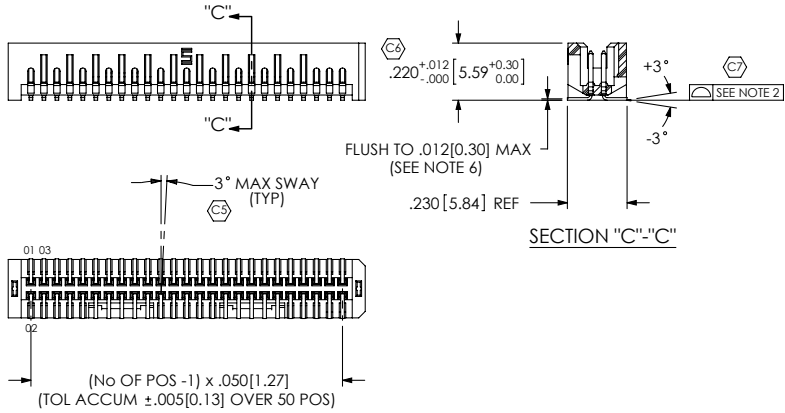


**FIG. 5**  
 -P: PICK & PLACE PAD OPTION  
 (SHOWN: TFML-125-02-XXX-D-P)  
 (SAME AS FIG. 1, UNLESS OTHERWISE STATED)  
 NOTCH ON PAD TO BE ON SAME END AS NOTCH IN TFM BODY

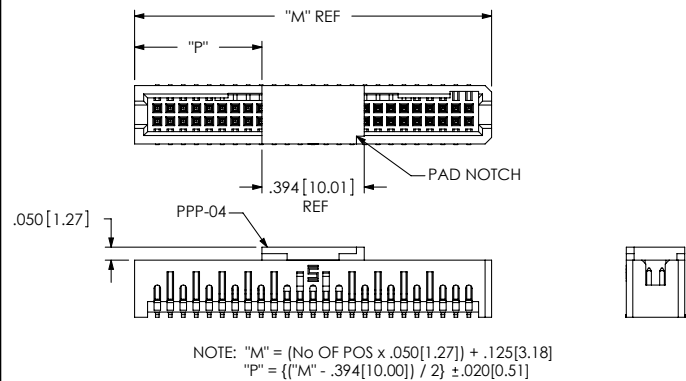

**FIG. 4**  
 -RA: RIGHT ANGLE OPTION  
 (SHOWN: TFML-125-01-XXX-D-RA)  
 (SAME AS FIG. 1, UNLESS OTHERWISE STATED)

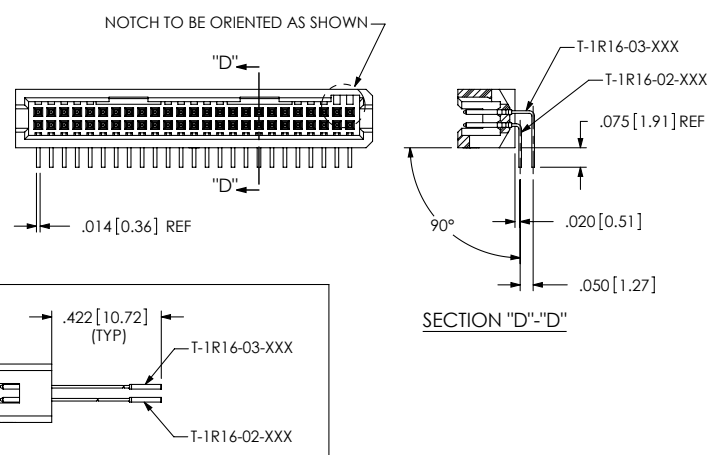

**FIG. 6**  
 -K: POLYAMIDE FILM PAD OPTION  
 (SHOWN: TFML-125-02-XXX-D-K)  
 (SAME AS FIG. 1, UNLESS OTHERWISE STATED)

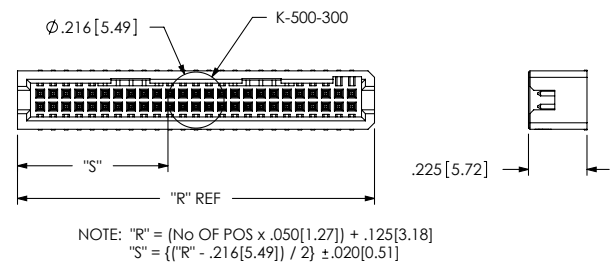

F:\DWG\MISC\MKTG\TFML-1XX-XX-XXX-D-XX-MKT.SLDRW

**PROPRIETARY NOTE**  
 THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.  
 DO NOT SCALE DRAWING  
 SHEET SCALE: 1.75:1

**samtec**  
 520 PARK EAST BLVD, NEW ALBANY, IN 47150  
 PHONE: 812-944-6733 FAX: 812-948-5047  
 e-Mail: info@SAMTEC.com code: 55322

DESCRIPTION:  
**.050 SHROUDED TERMINAL ASSEMBLY**


DWG. NO.  
**TFML-1XX-XX-XXX-D-XX**

BY: DEANP 4/8/99 SHEET 2 OF 4


REVISION AH

PACKAGING VIEWS


PARTS TO BE POSITIONED WITH POLARIZING NOTCH FACING THE SAMTEC LOGO AND ARROW.

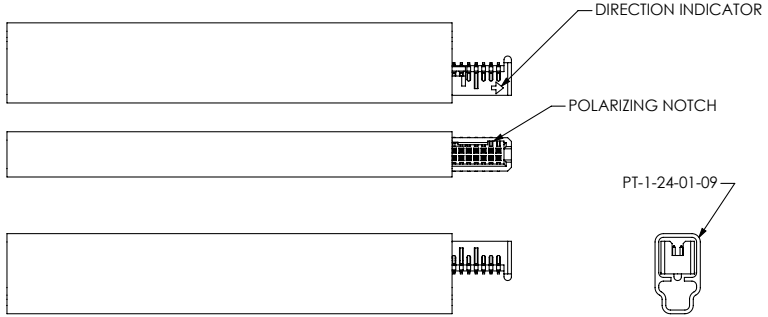

PARTS TO BE POSITIONED WITH TAILS FACING LOGO SIDE OF TUBE AND POLARIZING NOTCH ORIENTED AS SHOWN

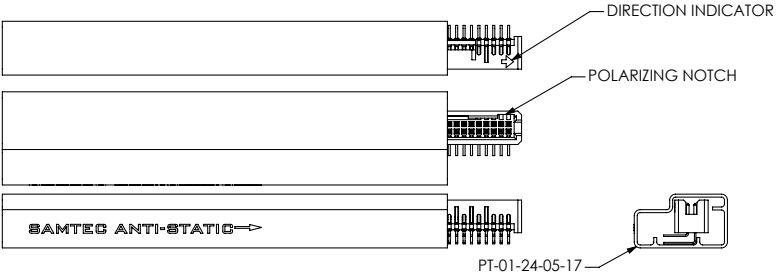

POSITION PARTS WITH POLARIZING NOTCH ORIENTED AS SHOWN

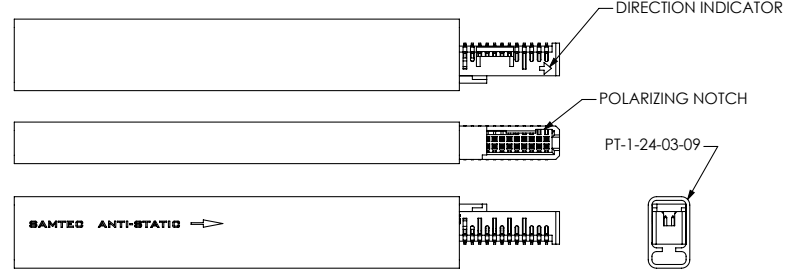

LEAD STYLE	PACKAGING TUBE	PLUG
-RA ONLY	PT-1-24-05-17	TP-07
-01,-02 EXCEPT -RA OR -P	PT-1-24-01-09	TP-24
-01-P,-02-P	PT-1-24-03-09	TP-03

FIG. 7

-A: ALIGNMENT PIN OPTION  
(SHOWN: TFML-125-02-XXX-D-A)  
(SAME AS FIG. 1, UNLESS OTHERWISE STATED)  
-NOT AVAILABLE WITH -RA

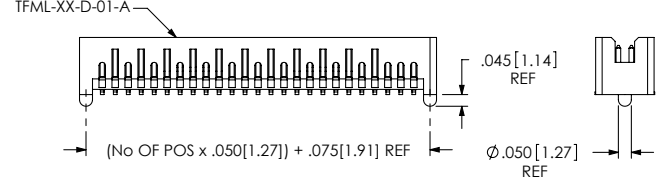


FIG. 8

-SA: STAKED ALIGNMENT PIN OPTION  
(SHOWN: TFML-125-02-XXX-D-SA)  
(SAME AS FIG. 1, UNLESS OTHERWISE STATED)  
-NOT AVAILABLE ON -RA


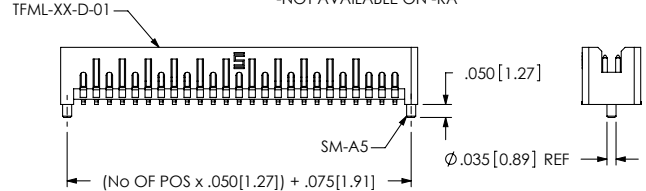


FIG. 9

-LC: LOCKING CLIP OPTION  
(SHOWN: TFML-125-02-XXX-D-LC)  
(SAME AS FIG. 1, UNLESS OTHERWISE STATED)  
-NOT AVAILABLE ON -RA

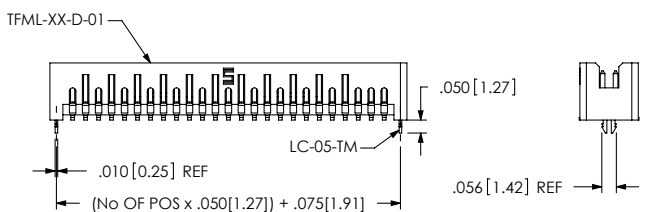

F:\DWG\MISC\MKTG\TFML-1XX-XX-XXX-D-XX-MKT.SLDDRW

**PROPRIETARY NOTE**  
THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 1.75:1




DESCRIPTION: .050 SHROUDED TERMINAL ASSEMBLY


DWG. NO. **TFML-1XX-XX-XXX-D-XX**

BY: DEANP 4/8/99 SHEET 3 OF 4

REVISION AH

FIG. 10  
 -SN: SOLDER PIN OPTION  
 (SHOWN: TFML-125-02-XXX-D-SN)  
 (SAME AS FIG. 1, UNLESS OTHERWISE STATED)  
 (ONLY AVAILABLE ON -02 LEAD STYLE)

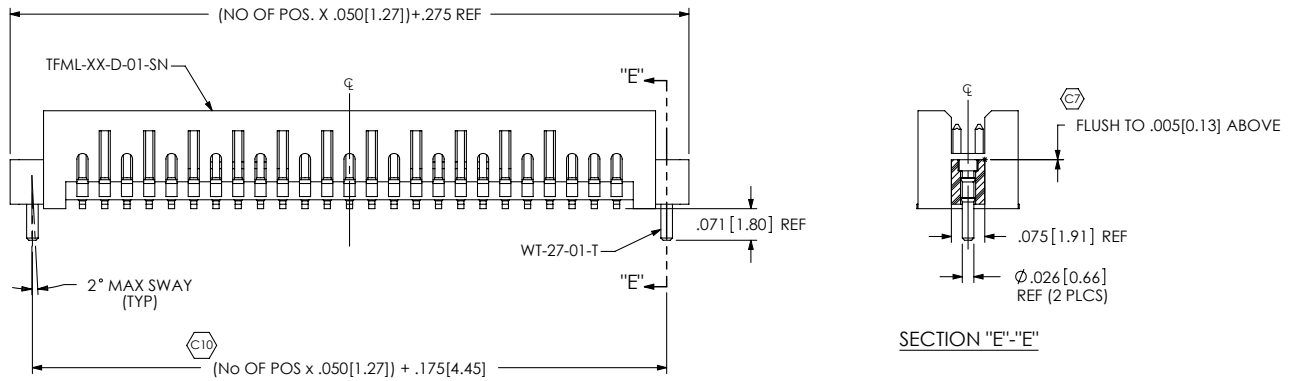

<p><b>PROPRIETARY NOTE</b>          THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.</p>	 520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail: info@SAMTEC.com code: 55322	
	DESCRIPTION: .050 SHROUDED TERMINAL ASSEMBLY	
DO NOT SCALE DRAWING  SHEET SCALE: 3:1	DWG. NO. <b>TFML-1XX-XX-XXX-D-XX</b>	
	BY: DEANP 4/8/99	SHEET 4 OF 4

F:\DWG\MISC\MKTG\TFML-1XX-XX-XXX-D-XX-MKT.SLDDRW