

AMC3842B/43B/44B/45B

CURRENT MODE PWM CONTROLLER

DESCRIPTION

The AMC3842B/43B/44B/45B are fixed frequency current-mode PWM controllers specially designed for OFF-Line switching power supply and DC-to-DC converters with a minimum number of external components. These devices feature a trimmed oscillator for precise duty cycle control, a temperature compensated reference, high gain error amplifier, current sensing comparator, and high current totem pole output which is suitable for driving MOSFETs.

The under voltage lock-out (U.V.L.O.) is designed to operate with 200µA start-up current in typical, allowing an efficient bootstrap supply voltage design. The U.V.L.O. thresholds for the AMC3842B/44B are 16V (on) and 10V (off), which are ideal for off-line applications. The corresponding typical threshold for the AMC3843/45BB is 8.4V (on) and 7.6V (off). The AMC3842B/43B can operate within 100% duty cycle and the AMC3844B/45B can operate within 50% duty cycle.

APPLICATIONS

- Off-line flyback or forward converters.
- DC-to-DC buck or boost converter.
- Monitor Power Supply




FEATURES

- Low Start-Up current (max. 200µA)
- Optimized for Off-Line and DC-to-DC Converters
- Maximum Duty Cycle
- U.V.L.O. with Hysteresis
- Operating Frequency Up to 500KHz
- Internal Trimmed Bandgap Reference
- High Current Totem Pole Output
- Error Amplifier With Low Output Resistance
- Available in 8-Pin Plastic DIP and Surface Mount 14-Pin S.O.I.C.
- Identical pin assignment to earlier UC384X series.

AVAILABLE OPTIONS

Device	Start-UP Voltage	Hysteresis	Max. Duty Cycle
AMC3842B	16V	6V	< 100%
AMC3843B	8.4V	0.8V	< 100%
AMC3844B	16V	6V	< 50%
AMC3845B	8.4V	0.8V	< 50%

PACKAGE PIN OUT



ORDER INFORMATION

T _A (°C)	M	Plastic DIP-8 8-pin	D	Plastic SO-14 14-pin	DM	Plastic SO-8 8-pin
0 to 70		AMC384XBM		AMC384XBD		AMC384XBDM
0 to 70		AMC384XBM (Lead Free)		AMC384XBD (Lead Free)		AMC384XBDM (Lead Free)

Note: 1. All surface-mount packages are available in Tape & Reel. Append the letter "T" to part number (i.e. AMC384XBDT, or AMC384XBDMT).
 2. The letter "F" is marked for Lead Free process.



AMC3842B/43B/44B/45B


ABSOLUTE MAXIMUM RATINGS (Note 1)

Supply voltage, V _{CC}	35V
Output current, I _O	± 1A
Analog inputs, V _I	-0.3V to 6.3V
Error amp output sink current, I _{SINK(EA)}	10mA
Power dissipation (T _A = 25 °C), P _D	1W
Maximum juncture temperature, T _J	150 °C
Storage temperature range	-65 °C to 150 °C
Lead temperature (soldering, 10 seconds)	260 °C

Note 1: Exceeding these ratings could cause damage to the device. All voltages are with respect to Ground. Currents are positive into, negative out of the specified terminal.

THERMAL DATA

M PACKAGE:	
Thermal Resistance-Junction to Ambient, θ _{JA}	95 °C/W
D PACKAGE:	
Thermal Resistance-Junction to Ambient, θ _{JA}	120 °C/W
DM PACKAGE:	
Thermal Resistance-Junction to Ambient, θ _{JA}	165 °C/W
Junction Temperature Calculation: T _J = T _A + (P _D × θ _{JA}). The θ _{JA} numbers are guidelines for the thermal performance of the device/pc-board system. All of the above assume no ambient airflow.	

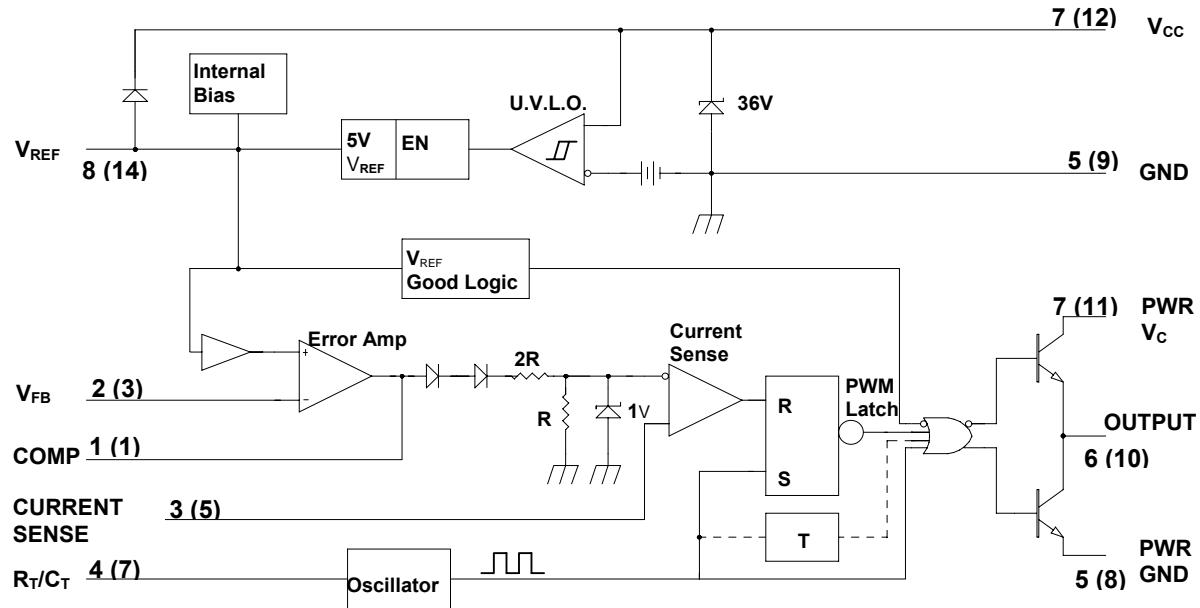BLOCK DIAGRAM


() are 14 Pin S.O.I.C. pin number

Note 2: V_{CC} and PWR V_C are internally connected for 8 pin packages.

Note 3: PWR GND and GND are internally connected for 8 pin packages.

Note 4: U.V.L.O. is 16V for 3842B/44B and 8.4V for 3843B/45B.

Note 5: Hysteresis is 6V for 3842B/44B and 0.8V for 3843B/45B.

Note 6: Toggle flip flop used only in 3844B/45B



AMC3842B/43B/44B/45B

RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Recommended Operating Conditions			Units
		Min.	Typ.	Max.	
Supply Voltage	V _{CC} / V _C			30	V
Input Voltage	V _I , R _T /C _T V _I , I _{SENSE} /V _{FB}	0		5.5	V
Output Voltage	V _O , Output	0		30	V
Supply Current	I _{CC}			25	mA
Average Output Current	I _O			200	mA
Reference Output Current	I _{O(REF)}			-20	mA
Timing Capacitor	C _T	1			nF
Oscillator Frequency	f _{OSC}		100	500	KHz
Operating Free-air Temperature	T _A	0		70	°C

ELECTRICAL CHARACTERISTICS

Unless otherwise specified, these specifications apply over the operating ambient temperature for AMC384XB with $0^{\circ}\text{C} \leq T_A \leq 70^{\circ}\text{C}$; $V_{CC} = 15\text{V}$ (note 7); $R_T = 10\text{K}$; $C_T = 3.3\text{nF}$. Low duty cycle pulse testing techniques are used which maintains junction and case temperatures equal to the ambient temperature.

Parameter	Symbol	Test Conditions	AMC384XB			Units
			Min.	Typ.	Max.	

Reference Section

Reference output Voltage	V _{REF}	$T_J = 25^{\circ}\text{C}$, $I_{REF} = 1\text{mA}$	4.9	5.0	5.1	V
Line Regulation		$12\text{V} \leq V_{CC} \leq 25\text{V}$, $T_J = 25^{\circ}\text{C}$		6	20	mV
Load Regulation		$1\text{mA} \leq I_{REF} \leq 20\text{mA}$		6	25	mV
Short Circuit Output Current	I _{SC}	$T_J = 25^{\circ}\text{C}$	-30	-100	-180	mA

Oscillator Section

Oscillation Frequency	f	$T_J = 25^{\circ}\text{C}$	47	52	57	KHz
Frequency Change with Voltage		$12\text{V} \leq V_{CC} \leq 25\text{V}$		0.2	1.0	%
Frequency Change with Temperature (note 8)		$T_{MIN} \leq T_A \leq T_{MAX}$		5		%
Peak-to-peak Amplitude At R _T /C _T	V _{OSC}			1.7		V

Current Sense Section

Gain (note 9 & 10)	A _{VOL}		2.85	3.00	3.15	V/V
Maximum Input Signal (note 9)	V _{I(MAX)}	COMP = 5V	0.9	1.0	1.1	V
Power Supply Rejection Ratio (note 9)	PSRR	$12\text{V} \leq V_{CC} \leq 25\text{V}$ (note 9)		70		dB
Input Bias Current	I _{BIA} S			-3.0	-10	μA

ELECTRICAL CHARACTERISTICS (Continued)

Error Amplifier Section						
Input Bias Current	I _{BIAS}			-0.1	-2	µA
Input Voltage	V _{I(EA)}	COMP = 2.5V	2.42	2.50	2.58	V
Open Loop Voltage Gain	G _{VO}	2V ≤ V _O ≤ 4V	65	90		dB
Unity Gain Bandwidth (note 8)	UGBW	T _J = 25 °C	0.7	1		MHz
Power Supply Rejection Ratio	PSRR	12V ≤ V _{CC} ≤ 25V	60	70		dB
Output Sink Current	I _{SINK}	V _{FB} = 2.7V, COMP = 1.1V	2	7		mA
Output Source Current	I _{SOURCE}	V _{FB} = 2.3V, COMP = 5.0V	-0.5	-1.0		mA
High Output Voltage	V _{OH}	V _{FB} = 2.3V, R _L = 15KΩ to GND	5	6		V
Low Output Voltage	V _{OL}	V _{FB} = 2.7V, RL = 15KΩ to V _{REF}		0.7	1.1	V
Output Section						
Output Low Level	V _{OL}	I _{SINK} = 20mA		0.1	0.4	V
		I _{SINK} = 200mA		1.4	2.2	
Output High Level	V _{OH}	I _{SOURCE} = 20mA	13	13.5		V
		I _{SOURCE} = 200mA	12	13.0		
Rise Time (note 9)	t _r	T _J = 25 °C, C _L = 1nF		50	150	ns
Fall Time (note 9)	t _f	T _J = 25 °C, C _L = 1nF		50	150	ns
Under-Voltage Lockout Section						
Start Threshold	V _{TH(ST)}	AMC3842B/44B	14.5	16.0	17.5	V
		AMC3843B/45B	7.8	8.4	9.0	
Min. Operating Voltage		AMC3842B/44B	8.5	10	11.5	V
		AMC3843B/45B	7.0	7.6	8.2	
PWM Section						
Maximum Duty Cycle	Dmax	AMC3842B/43B	94	97	100	%
		AMC3844B/45B	47	48	50	
Total Standby Current						
Startup Current		AMC3842B/44B			0.2	mA
		AMC3843B/45B			0.2	
Operating Supply Current	I _{CC}	V _{FB} = I _{SENSE} = 0V		14	17	mA
Zener Voltage	V _Z	I _{CC} = 25mA	30	35		V

Note 7: Adjust V_{CC} above the start threshold before setting at 15V

Note 8: These parameters, although guaranteed, are not 100% tested in production prior to shipment


Note 9: Parameters are measured at trip point of latch with V_{FB} = 2V

Note 10: Gain is measured between I_{SENSE} and COMP with the input changing from 0V to 0.8V


CHARACTERIZATION CURVES

Below characterization curves was referenced by Fig.4

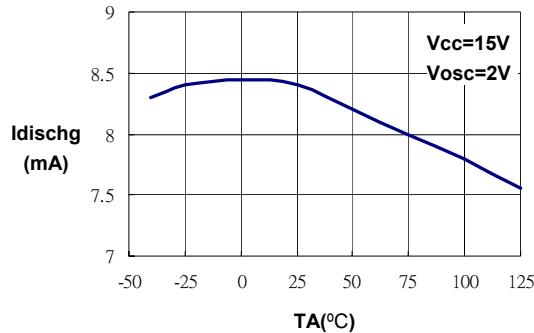
Oscillator Discharge Current vs.
Temperature



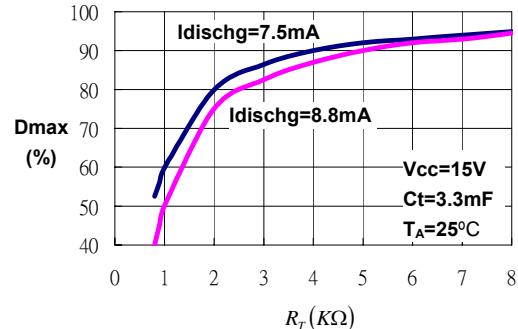
Maximum Output Duty Cycle vs. Timing
Resistor



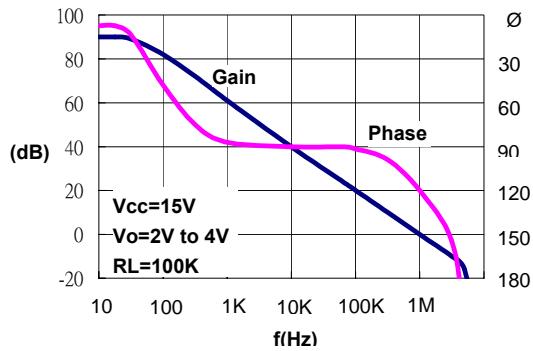
Error Amp Open-Loop Gain and Phase vs.
Frequency



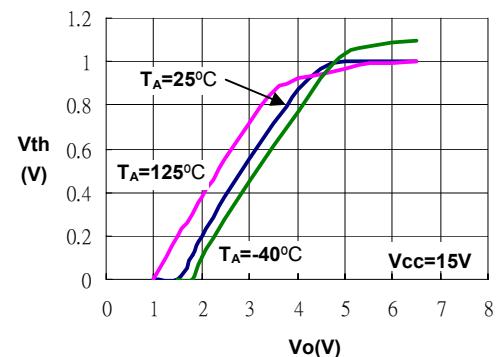
Current Sense Input Threshold vs.
Error Amp Output Voltage.





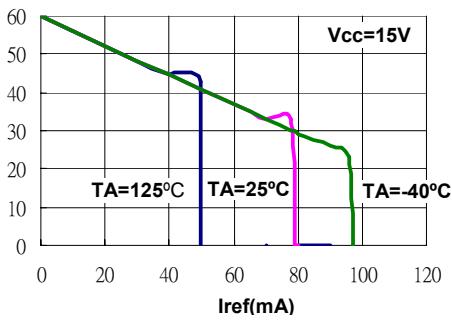
Reference Voltage Change vs. Source
Current.



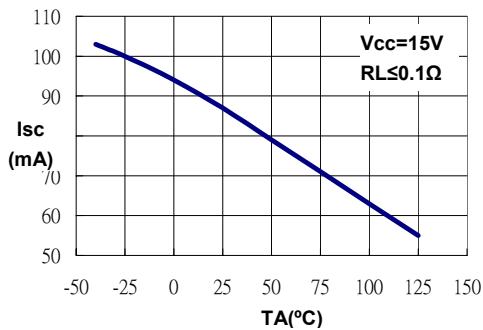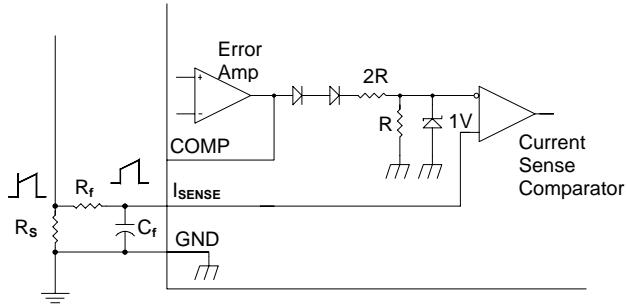
Reference Short Circuit Current vs.
Temperature.



APPLICATION INFORMATION

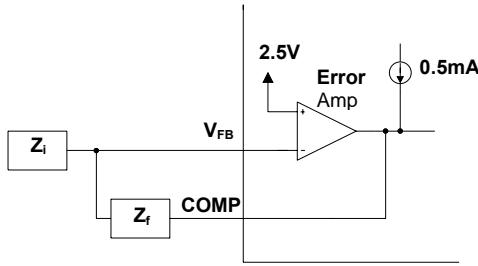Fig. 1. Current Sense Circuit

 Peak current (I_S) is set by: $I_{S(MAX)} = 1V/R_s$

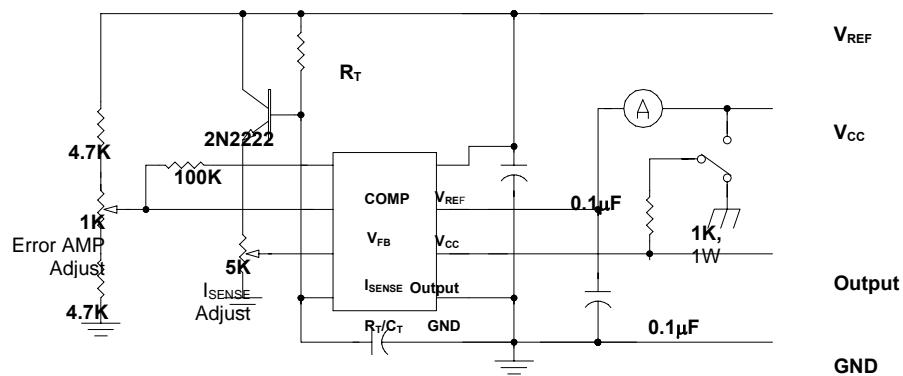Fig. 2. Error Amplifier Configuration - the amplifier can source or sink up to 0.5mA

Fig. 3. Oscillator Section

$$\text{For } R_T < 5K, f = \frac{1.72}{R_T C_T}$$


Fig. 4. Open-loop laboratory test fixture: Careful grounding techniques are necessary for high peak currents associated with capacitive loads. Timing and bypass capacitors should be connected to GND pin in a single point ground. The transistor and 5K potentiometer are used to sample the oscillator waveform and apply an adjustable ramp to the I_SENSE pin

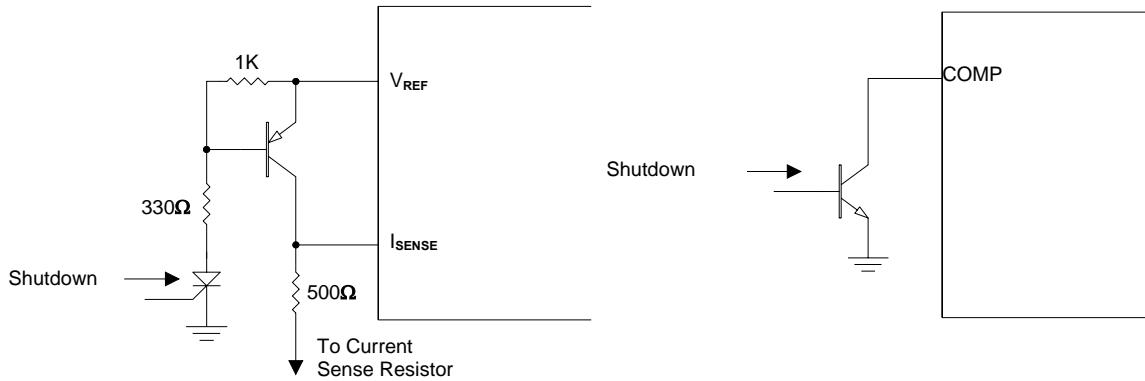
APPLICATION INFORMATION (continued)


Fig. 5. Shutdown Techniques - there are two ways to shutdown the PWM controller: 1) raise the voltage at I_{SENSE} above 1V or, 2) pull the COMP below a voltage two diodes above ground.

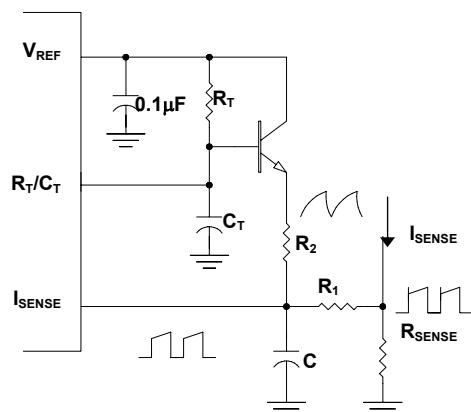
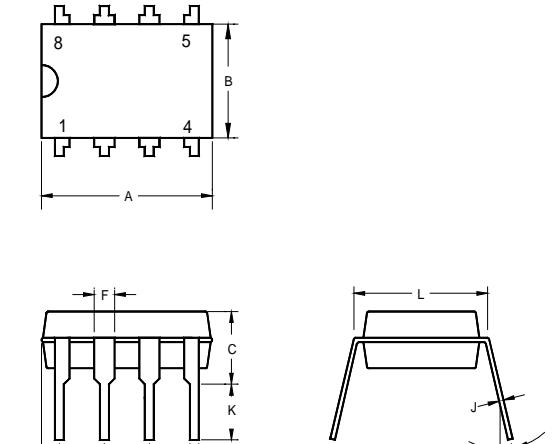
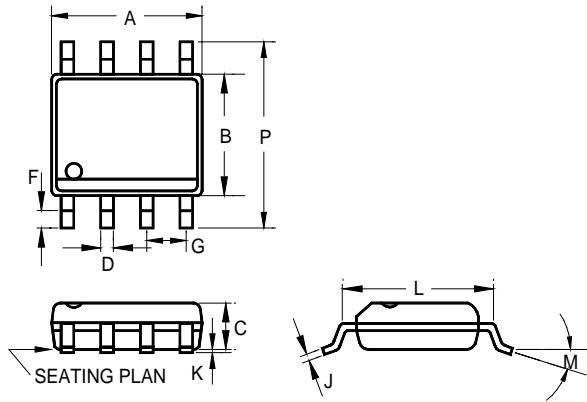


Fig 6. Slope Compensation – To achieve duty cycles over 50% for some applications, the above slope compensation technique is suggested by resistively summing a fraction of the oscillator ramp with the current sense signal.



PACKAGE
8-Pin Plastic DIP


	INCHES			MILLIMETERS		
	MIN	TYP	MAX	MIN	TYP	MAX
A	0.355	0.365	0.400	9.02	9.27	10.16
B	0.240	0.250	0.280	6.10	6.35	7.11
C	-	0.200	0.210	-	5.08	5.33
D	0.014	0.018	0.022	0.356	0.46	0.55
F	0.045	0.060	0.065	1.15	1.52	1.65
G	-	0.100	-	-	2.54	-
H	0.050	-	0.090	1.27	-	2.29
J	0.008	0.010	0.015	0.20	0.25	0.38
K	0.115	0.130	0.150	2.92	3.30	3.81
L	0.300 BSC.			7.62 BSC.		
M	0°	7°	15°	0°	7°	15°

8-Pin Plastic S.O.I.C.


	INCHES			MILLIMETERS		
	MIN	TYP	MAX	MIN	TYP	MAX
A	0.183	-	0.202	4.65	-	5.13
B	0.144	0.156	0.163	3.66	3.95	4.14
C	0.068	-	0.074	1.35	-	1.88
D	0.010	0.016	0.020	0.25	0.41	0.51
F	0.015	0.020	0.035	0.38	0.50	0.89
G	0.050 BSC			1.27 BSC		
J	0.007	-	0.010	0.19	-	0.25
K	0.005	-	0.010	0.13	-	0.25
L	0.189	-	0.205	4.80	-	5.21
M	0°	-	8°	0°	-	8°
P	0.228	0.236	0.244	5.79	6.00	6.20

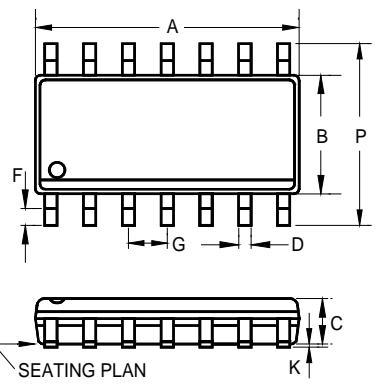14-Pin Plastic S.O.I.C.

	INCHES			MILLIMETERS		
	MIN	TYP	MAX	MIN	TYP	MAX
A	0.336	-	0.344	8.54	-	8.74
B	0.159	-	0.158	3.81	-	4.01
C	0.053	-	0.069	1.35	-	1.75
D	0.014	-	0.018	0.35	-	0.46
F	0.026	-	0.030	0.67	-	0.77
G	0.050 BSC			1.27 BSC		
J	0.007	-	0.010	0.19	-	0.25
K	0.004	-	0.010	0.10	-	0.25
L	0.189	-	0.205	4.82	-	5.21
M	-	-	8°	-	-	8°
P	0.228	-	0.244	5.79	-	6.20



AMC3842B/43B/44B/45B

IMPORTANT NOTICE

ADDtek reserves the right to make changes to its products or to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

A few applications using integrated circuit products may involve potential risks of death, personal injury, or severe property or environmental damage. ADDtek integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life-support applications, devices or systems or other critical applications. Use of ADDtek products in such applications is understood to be fully at the risk of the customer. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

ADDtek assumes no liability to customer product design or application support. ADDtek warrants the performance of its products to the specifications applicable at the time of sale.

ADDtek Corp.
9F, No. 20, Sec. 3, Bade Rd., Taipei, Taiwan, 105
TEL: 2-25700299
FAX: 2-25700196
