

4

3




2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION AUG. 2006.  
 COPYRIGHT 2009 BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
C		RELEASED AS PER ECR-09-017658	06AUG2009	SRE	PCH

NOTE :  
 PRODUCT METS TE SPEC: 230-702.  
 MATERIAL :  
 HOUSING : NYLON 6T, CH230NK(ARLEN),  
 UL94V-0, BLACK COLOR.  
 CONTACT : BRASS, THICKNESS=0.50mm.  
 FINISH :  
 CONTACT: 0.254um [10µ"] MIN. GOLD PLATED ON CONTACT AREA  
 2.54um [100µ"] MIN. MATTE TIN PLATED ON SOLDER TAIL,  
 1.27um [50µ"] MIN. NICKEL UNDERPLATED OVER ALL  
 3. APPLICATION :  
 SOLDERTAIL LENGTH 2.6 FOR PCB THICKNESS 1.6±0.1  
 4. WAVE SOLDER CAPABLE TO 265°C PER TE SPEC 109-202, CONDITION B  
 5. "⊕" SHOWS FAI MEASUREMENT POINT.  
 6. "▽" SHOWS QIP INSPECTION POINT.  
 7. PURCHASE FROM CKM INDUSTRIAL CO., LTD.  
 OR TE ENGINEERING APPROVED EQUIVALENT.  
 8. 1-1734508-1MUST EMPHRAxis POSITION 2.  
 FINISH :  
 CONTACT: 0.2um [8µ"] MIN. GOLD PLATED ON CONTACT AREA  
 2.54um [100µ"] MIN. MATTE TIN PLATED ON OLDER TAIL,  
 1.27um [50µ"] MIN. NICKEL UNDERPLATED OVER ALL  
 10. QUALIFICATION TEST REPORT:501-57197

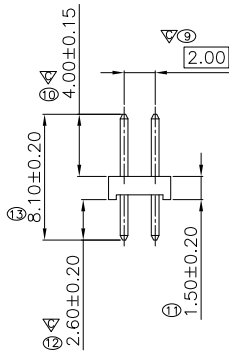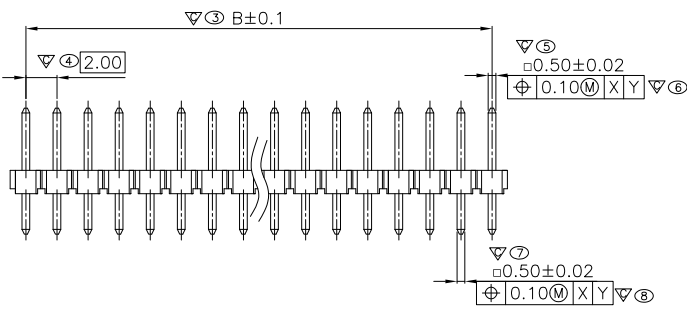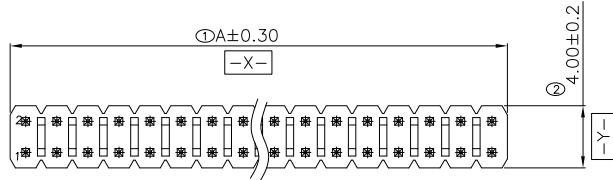

REV	DATE	DESCRIPTION	BY	CHKD	APVD
2	10.00	8.00	10	1-	-1
	80.00	78.00	80	8-	-0
	78.00	76.00	78	7-	-8
	76.00	74.00	76	7-	-8
	74.00	72.00	74	7-	-4
	72.00	70.00	72	7-	-2
	70.00	68.00	70	7-	-0
	68.00	66.00	68	6-	-8
	66.00	64.00	66	6-	-6
	64.00	62.00	64	6-	-4
	62.00	60.00	62	6-	-2
	60.00	58.00	60	6-	-0
	58.00	56.00	58	5-	-8
	56.00	54.00	56	5-	-6
	54.00	52.00	54	5-	-4
	52.00	50.00	52	5-	-2
	50.00	48.00	50	5-	-0
	48.00	46.00	48	4-	-8
	46.00	44.00	46	4-	-6
	44.00	42.00	44	4-	-4
	42.00	40.00	42	4-	-2
	40.00	38.00	40	4-	-0
	38.00	36.00	38	3-	-8
	36.00	34.00	36	3-	-6
	34.00	32.00	34	3-	-4
	32.00	30.00	32	3-	-2
	30.00	28.00	30	3-	-0
	28.00	26.00	28	2-	-8
	26.00	24.00	26	2-	-6
	24.00	22.00	24	2-	-4
	22.00	20.00	22	2-	-2
	20.00	18.00	20	2-	-0
	18.00	16.00	18	1-	-8
	16.00	14.00	16	1-	-6
	14.00	12.00	14	1-	-4
	12.00	10.00	12	1-	-2
	10.00	8.00	10	1-	-0
	8.00	6.00	8		-8
	6.00	4.00	6		-6
	4.00	2.00	4		-4

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN O.HU 30JUN2006	Tyco Electronics Corporation Bangalore, India.
CHK S.HOU 30JUN2006	
APVD W.J.KE 30JUN2006	
NAME AMPMODU, 2.0mm PITCH, POST HDR, VERTICAL, MOUNT TYPE	
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 0.5 1 PLC ± 0.2 2 PLC ± 0.1 3 PLC ± 0.05 4 PLC ± - ± 3°
MATERIAL 1	FINISH 2 9
PRODUCT SPEC 108-57197	APPLICATION SPEC
SIZE A3	CAGE CODE 00779
WEIGHT	DRAWING NO C-1734508
CUSTOMER DRAWING	RESTRICTED TO
SCALE 1:1	SHEET 1 of 2
	REV C

4

3


2

1

THIS DRAWING IS UNLABELLED. RELEASED FOR PUBLICATION AUG. 2006.  
 COPYRIGHT 2009 BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.


LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
IR	-	SEE SHEET 1	-	-	-	

HEADER(P=2.00)  
 DUAL ROW SERIES(1.50)

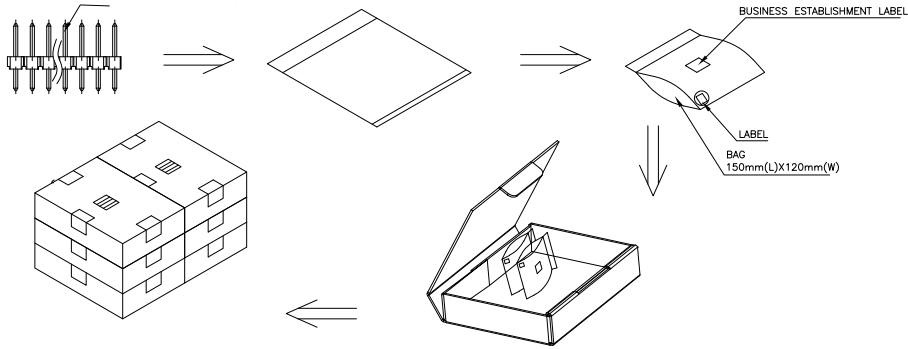

	6.90 KG	5.52 KG	500	8	6	24000 PCS	10
	5.786 KG	4.406 KG	50	8	6	2400 PCS	80
OBSOLETE	5.676 KG	4.296 KG	50	8	6	2400 PCS	78
OBSOLETE	5.665 KG	4.185 KG	50	8	6	2400 PCS	76
OBSOLETE	5.433 KG	4.053 KG	50	8	6	2400 PCS	74
OBSOLETE	5.344 KG	3.964 KG	50	8	6	2400 PCS	72
OBSOLETE	5.236 KG	3.856 KG	50	8	6	2400 PCS	70
OBSOLETE	5.126 KG	3.746 KG	50	8	6	2400 PCS	68
OBSOLETE	5.74 KG	4.36 KG	60	8	6	2880 PCS	66
OBSOLETE	5.61 KG	4.23 KG	60	8	6	2880 PCS	64
OBSOLETE	5.478 KG	4.098 KG	60	8	6	2880 PCS	62
OBSOLETE	6.006 KG	4.626 KG	70	8	6	3360 PCS	60
OBSOLETE	5.852 KG	4.472 KG	70	8	6	3360 PCS	58
OBSOLETE	7.548 KG	6.168 KG	100	8	6	4800 PCS	56
OBSOLETE	7.33 KG	5.947 KG	100	8	6	4800 PCS	54
OBSOLETE	7.106 KG	5.726 KG	100	8	6	4800 PCS	52
	6.89 KG	5.51 KG	100	8	6	4800 PCS	50
	6.669 KG	5.289 KG	100	8	6	4800 PCS	48
	6.448 KG	5.068 KG	100	8	6	4800 PCS	46
	6.228 KG	4.848 KG	100	8	6	4800 PCS	44
	6.007 KG	4.627 KG	100	8	6	4800 PCS	42
	5.786 KG	4.406 KG	100	8	6	4800 PCS	40
	5.565 KG	4.185 KG	100	8	6	4800 PCS	38
	5.344 KG	3.964 KG	100	8	6	4800 PCS	36
	5.124 KG	3.744 KG	100	8	6	4800 PCS	34
	4.903 KG	3.523 KG	100	8	6	4800 PCS	32
	4.687 KG	3.307 KG	100	8	6	4800 PCS	30
	4.466 KG	3.086 KG	100	8	6	4800 PCS	28
	5.678 KG	4.298 KG	150	8	6	7200 PCS	26
	5.35 KG	3.97 KG	150	8	6	7200 PCS	24
	6.23 KG	4.85 KG	200	8	6	9600 PCS	22
	5.79 KG	4.41 KG	200	8	6	9600 PCS	20
	6.35 KG	4.97 KG	250	8	6	12000 PCS	18
	5.78 KG	4.40 KG	250	8	6	12000 PCS	16
	6.00 KG	4.62 KG	300	8	6	14400 PCS	14
	5.34 KG	3.96 KG	300	8	6	14400 PCS	12
	6.90 KG	5.52 KG	500	8	6	24000 PCS	10
	5.80 KG	4.42 KG	500	8	6	24000 PCS	8
	6.68 KG	5.30 KG	800	8	6	38400 PCS	6
	5.79 KG	4.41 KG	1000	8	6	48000 PCS	4
GROSS WEIGHT	NET WEIGHT	PCS/BAG	BAGS /INNER CARTON	INNER CARTON /CARTON	QUANTITY	NO. OF POSTS	

NOTE:  
 △ PACKAGING MATERIAL IN PLASTIC, RUBBER, INK, PIGMENT AND PAINT MUST MEET CONTROLLED SUBSTANCES SPEC PER 230-702.  
 \* CADMIUM AND CADMIUM COMPOUNDS NOT TO EXCEED: 5 PPM.  
 \* LEAD, C, CHROM VI AND MERCURY NOT TO EXCEED: 100 PPM (COMBINED).  
 12. EACH BAG SHALL BE INCLUDED:  
 \* DESICCANT  
 13. DIMENSIONS:  
 CARTON:392\*245\*260mm  
 INNER CARTON:838,218\*185\*80mm  
 PE BAG:150\*120\*0.08mm

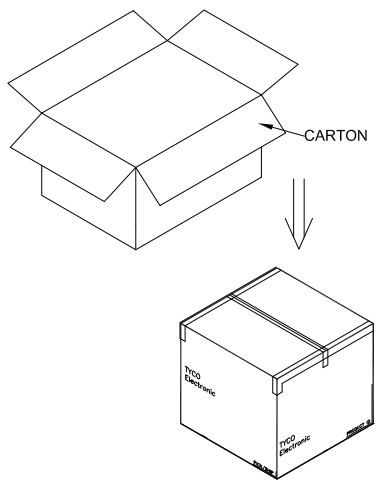

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN O.HU 30JUN2006	Tyco Electronics Corporation Bangalore,India.	
DIMENSIONS: mm		CHK S.HOU 30JUN2006	NAME AMPMODU, 2.0mm PITCH, POST HDR, VERTICAL, MOUNT TYPE	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 0.5 1 PLC ± 0.2 2 PLC ± 0.1 3 PLC ± 0.05 4 PLC ± 0.1 ANGLES ± 3'		APVD W.J.KE 30JUN2006	RESTRICTED TO	
MATERIAL FINISH		PRODUCT SPEC SEE SHEET 1	SIZE A3	CAGE CODE 00779
△ 11		APPLICATION SPEC	DRAWING NO C-1734508	
		WEIGHT	SCALE 1:1	SHEET 2 OF 2
		CUSTOMER DRAWING	REV C	