

## Adjustable Precision shunt Regulator


### ■ Features

- Precision reference voltage  
 CP431 :  $2.495V \pm 1\%$   
 CP431A :  $2.495V \pm 0.5\%$
- Sink current capability: 200mA
- Minimum cathode current for regulation:  $300 \mu A$
- Equivalent full-range temp. coefficient: 30 ppm/°C
- Fast turn-on response
- Low dynamic output impedance:  $0.2 \Omega$
- Programmable output voltage to 36v
- Low output noise.
- Packages: TO92,SOT23

### ■ Description

The CP431/CP431A are 3-terminal adjustable precision shunt regulators with guaranteed temperature stability over the applicable extended commercial temperature range. The output voltage may be set at any level greater than  $2.495V(V_{REF})$  up to 36V merely by selecting two external resistors that act as a voltage divider network. These devices have a typical output impedance of  $0.2 \Omega$ . Active output circuitry provides a very sharp turn-on characteristics, making these devices excellent improved replacements for Zener diodes in many applications. The precise (+/-) 1% Reference voltage tolerance of the CP431/431A make it possible in many applications to avoid the use of a variable resistor, consequently saving cost and eliminating drift and reliability problems associated with it.


### ■ Typical Application Circuit

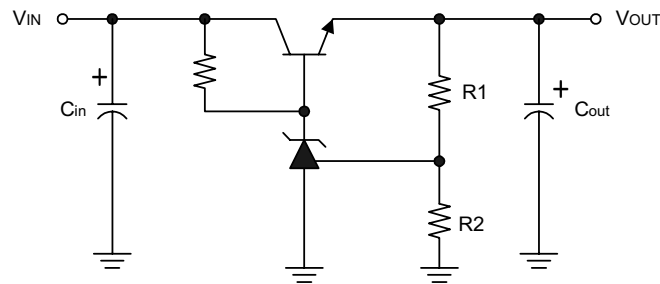

$$V_{OUT} = (1 + R1/R2)V_{REF}$$

Precision Regulator


### Ordering Information

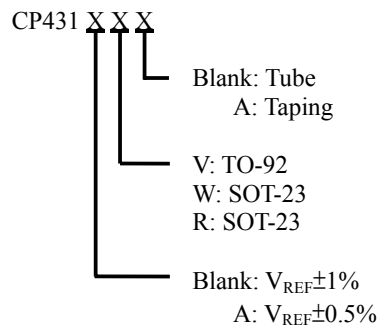


\* All specs and applications shown above subject to change without prior notice.

## Adjustable Precision shunt Regulator




### ■ Block Diagram

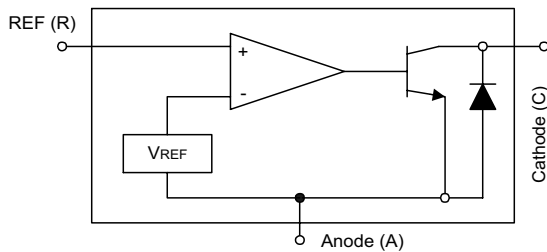

### ■ Symbol



### ■ Pin Configuration
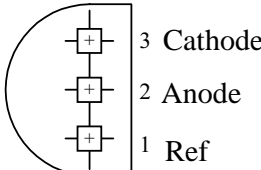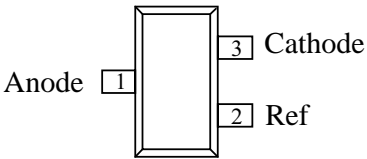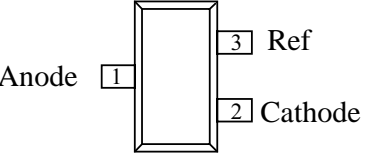
| Order Number                  | Pin Configuration (Top View)  |
|-------------------------------|---|
| CP431V<br>CP431AV<br>(TO-92)  |  |
| CP431W<br>CP431AW<br>(SOT-23) |  |
| CP431R<br>CP431AR<br>(SOT-23) |  |

\* All specs and applications shown above subject to change without prior notice.

## Adjustable Precision shunt Regulator

### ■ Absolute Maximum Ratings


|                                     |               |
|-------------------------------------|---------------|
| Cathode Voltage .....               | 36V           |
| Continuous Cathode Current .....    | -10mA ~ 150mA |
| Reference Input Current Range ..... | 10mA          |
| Operating Temperature Range .....   | 0°C ~ 70°C    |
| Lead Temperature.....               | 260°C         |
| Storage Temperature .....           | -65°C ~ 150°C |
| Power Dissipation                   |               |
| TO-92 Package .....                 | 0.78W         |
| SOT-23 package .....                | 0.23W         |

### ■ Electrical Characteristics (Ta=25°C , unless otherwise specified.)

| PARAMETER   | TEST CONDITIONS  | SYMBOL                                 | MIN.      | TYP.           | MAX.           | UNIT         |
|---|--|--|-----------|----------------|----------------|--------------|
| Reference voltage   | $V_{KA} = V_{REF}$ ,<br>$I_{KA} = 10mA$ (Fig.1)  | CP431<br>CP431A                        | $V_{REF}$ | 2.470<br>2.495 | 2.520<br>2.507 | V            |
| Deviation of Reference input voltage over temperature (Note 3)            | $V_{KA} = V_{REF}$ , $I_{KA} = 10mA$ ,<br>$T_a = 0^\circ C \sim +70^\circ C$                               | $V_{REF}$                              |           | 8.0            | 20             | mV           |
| Ratio of the change in Reference voltage to the change in Cathode voltage | $I_{KA} = 10mA$ (Fig.2)  | $\frac{\Delta V_{REF}}{\Delta V_{KA}}$ |           | -1.4<br>-1     | -2.0<br>-2     | mV/V<br>mV/V |
| Reference input current   | $R1 = 10K\Omega, R2 = \infty$ $I_{KA} = 10mA$  | $I_{REF}$                              |           | 1.4            | 3.5            | $\mu A$      |
| Deviation of Reference input current over temperature                     | $R1 = 10K\Omega, R2 = \infty$ $I_{KA} = 10mA$<br>$T_a = \text{Full range}$                                 | $\alpha I_{REF}$                       |           | 0.4            | 1.2            | $\mu A$      |
| Minimum Cathode current for regulation                                    | $V_{KA} = V_{REF}$ (Fig.1)   | $I_{KA(MIN)}$                          |           | 0.19           | 0.5            | mA           |
| Off-state current   | $V_{KA} = 36V$ , $V_{REF} = 0V$  | $I_{KA(OFF)}$                          |           | 0.1            | 1.0            | $\mu A$      |
| Dynamic output impedance  | $V_{KA} = V_{REF}$ $V_{KA} = V_{REF}$<br>$\Delta I_{KA} = 1mA \sim 100mA$<br>Frequency $\leq 1KHz$ (Fig.1) | $ Z_{KA} $                             |           | 0.2            | 0.5            | $\Omega$     |

\* All specs and applications shown above subject to change without prior notice.

## Adjustable Precision shunt Regulator

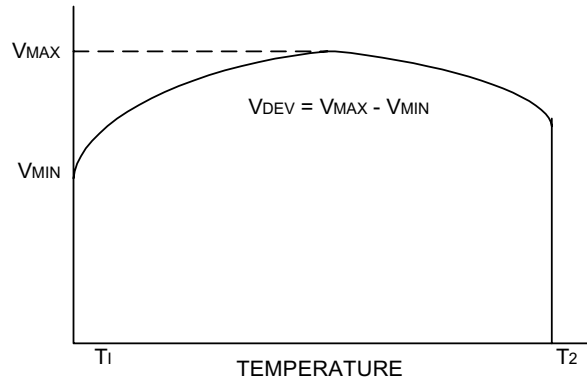

Note . Deviation of reference input voltage,  $V_{DEV}$ , is defined as the maximum variation of the reference over the full temperature range.

The average temperature coefficient of the reference input voltage  $\alpha V_{REF}$  is defined as:

$$|\alpha V_{REF}| = \frac{\left(\frac{V_{DEV}}{V_{REF}(25^{\circ}\text{C})}\right) \cdot 10^6}{T_2 - T_1} \dots\dots\dots (\text{ppm}/^{\circ}\text{C})$$

Where:

$T_2 - T_1$  = full temperature change.

$\alpha V_{REF}$  can be positive or negative depending on whether the slope is positive or negative.


Note 4. The dynamic output impedance,  $R_z$ , is defined as:

$$|Z_{KA}| = \frac{\Delta V_{KA}}{\Delta I_{KA}}$$

When the device is programmed with two external resistors R1 and R2 (see Figure 2.), the dynamic output impedance of the overall circuit, is defined as:

$$|Z_{KA}'| = \frac{\Delta v}{\Delta i} \approx |Z_{KA}| \cdot \left(1 + \frac{R1}{R2}\right)$$

### ■ Test Circuits

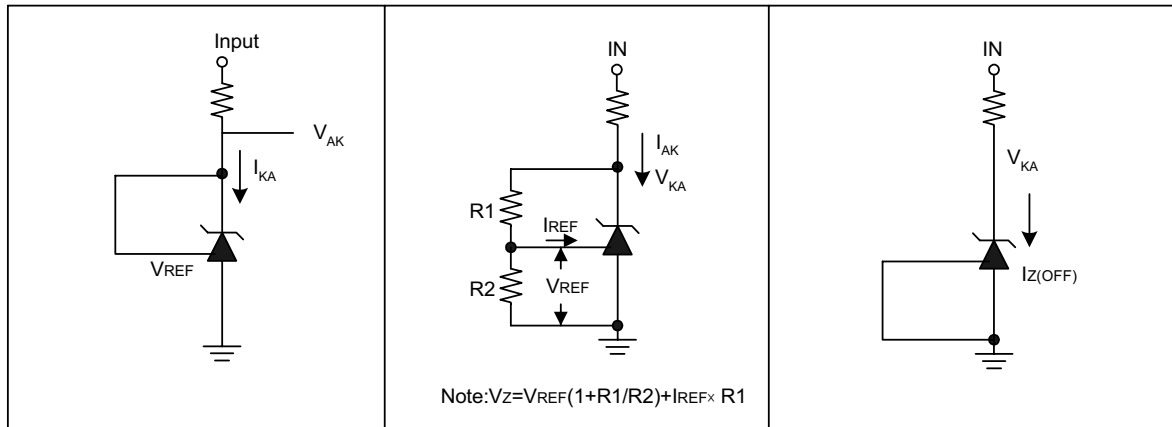

Test Circuit for  $V_{KA} = V_{REF}$






Test circuit for  $V_{KA} > V_{REF}$

Test Circuit for off-state Current

\* All specs and applications shown above subject to change without prior notice.

## Adjustable Precision shunt Regulator


### ■ Typical Performance Characteristics

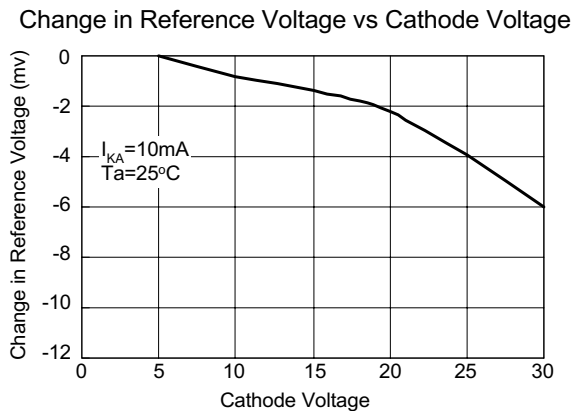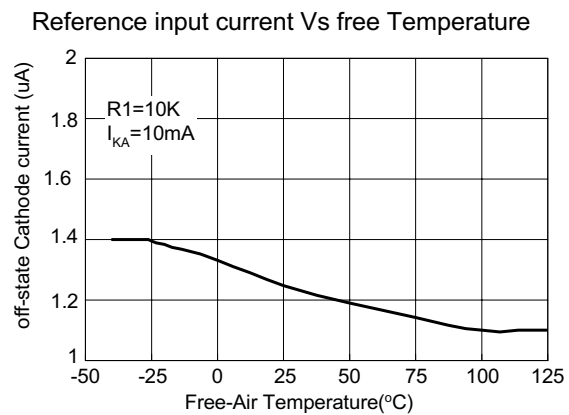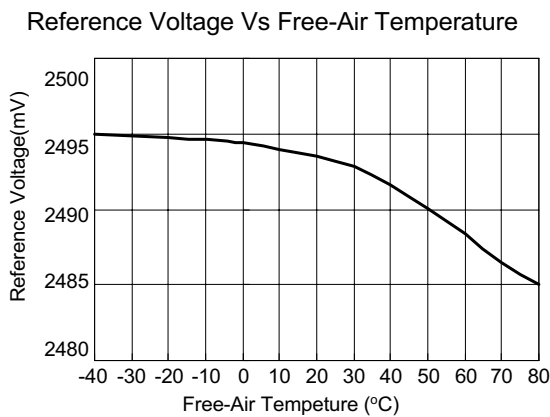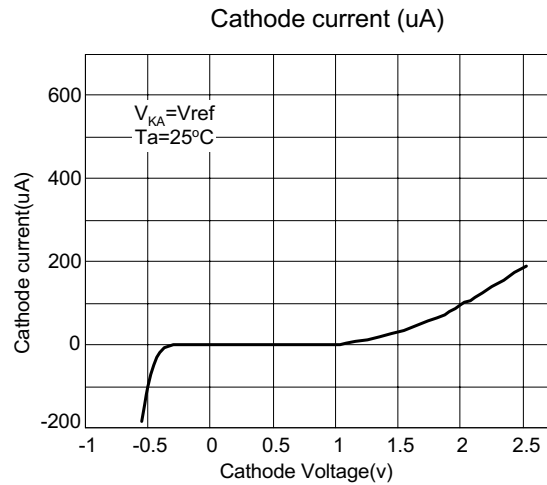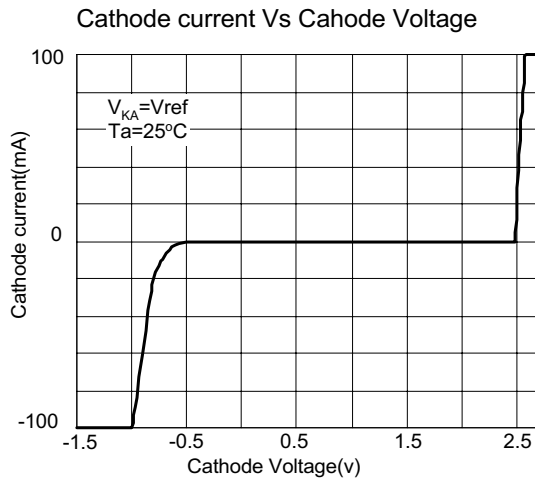

\* All specs and applications shown above subject to change without prior notice.

## Adjustable Precision shunt Regulator



### Application Examples

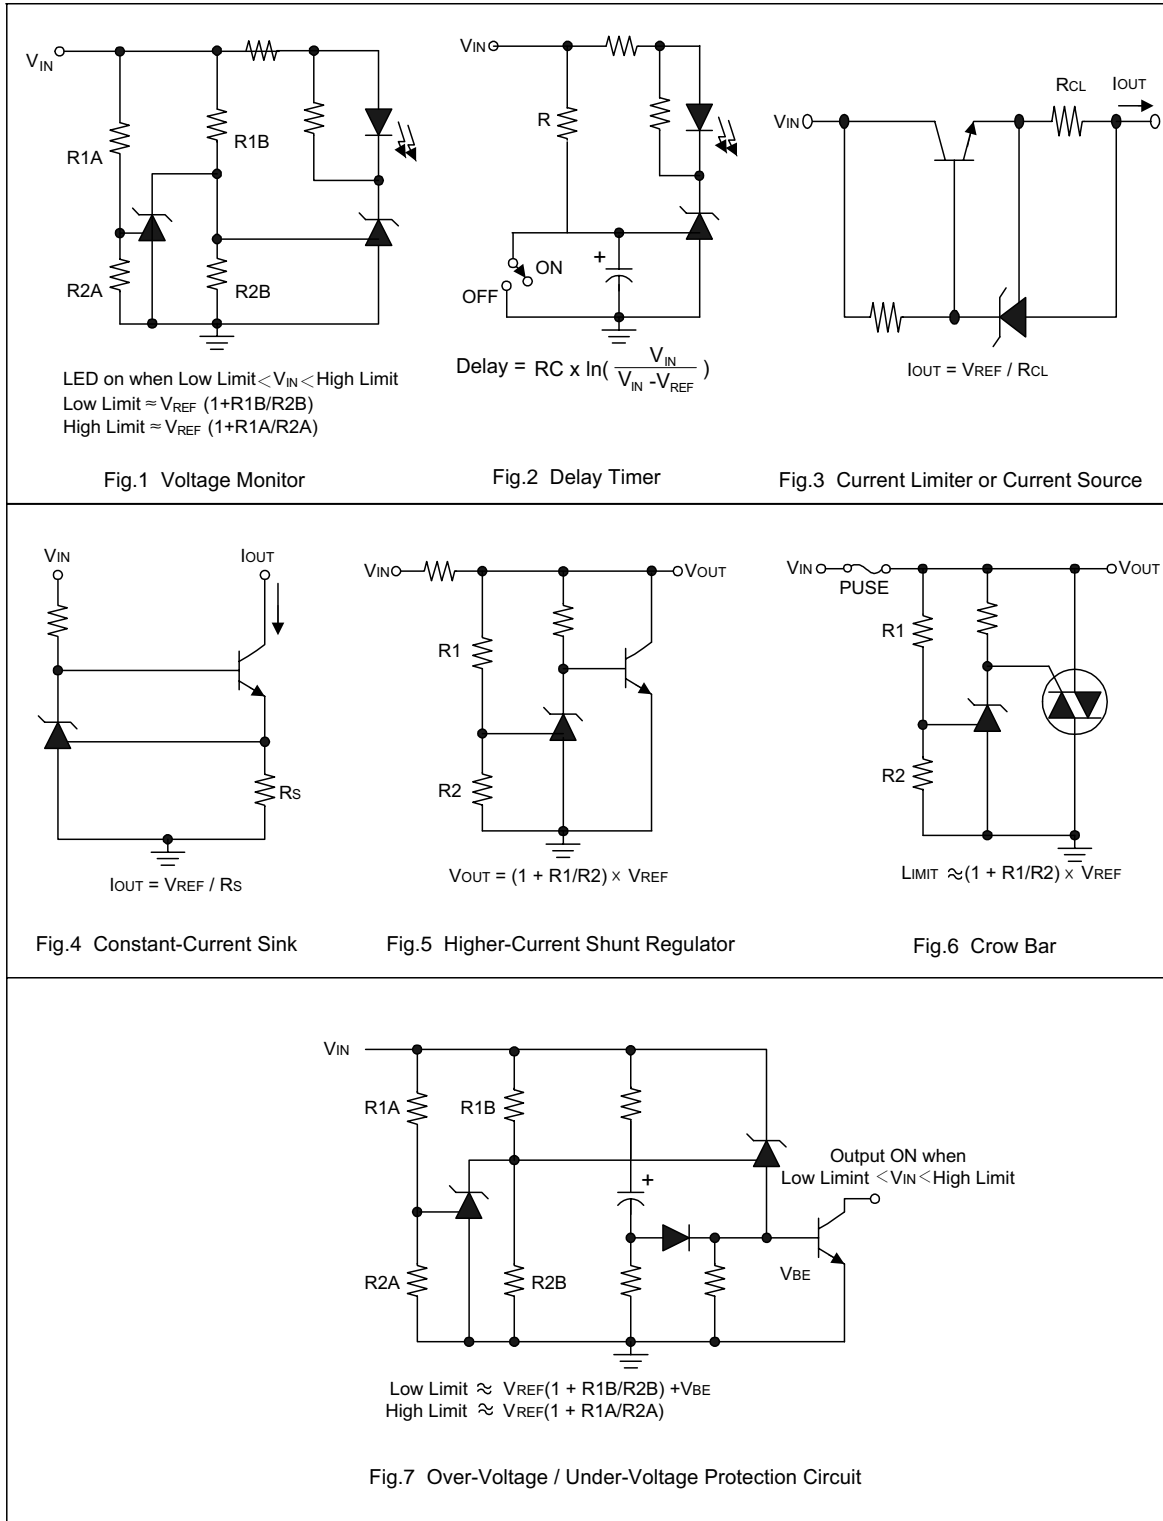

\* All specs and applications shown above subject to change without prior notice.

## Adjustable Precision shunt Regulator

Taping Specifications For SOT-23 package

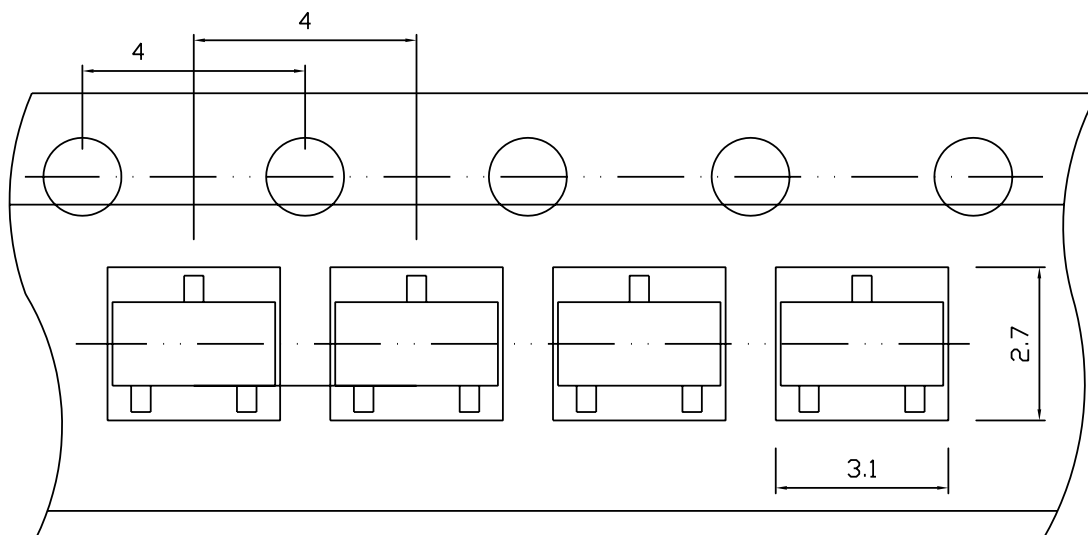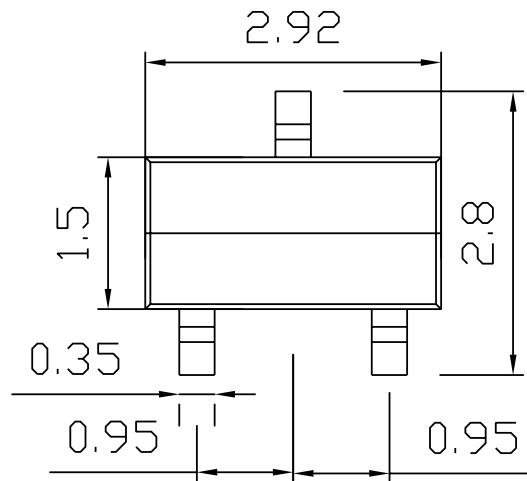


Units: mm

\* All specs and applications shown above subject to change without prior notice.

## Adjustable Precision shunt Regulator

Bulk Specifications For TO-92

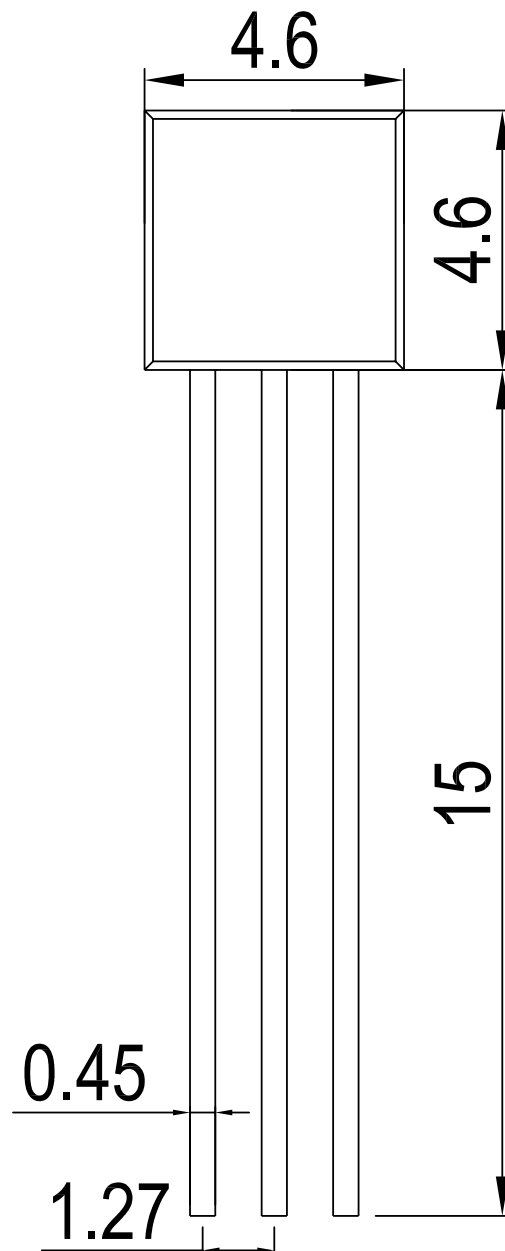

Units: mm

\* All specs and applications shown above subject to change without prior notice.


1F-5 NO.66 SEC.2 NAN-KAN RD., LUCHU, TAOYUAN, TAIWAN  
Tel:886-3-3214525  
Fax:886-3-3521052

Email: server@ceramate.com.tw  
Http: www.ceramate.com.tw



## Adjustable Precision shunt Regulator

Taping Specifications For TO-92 package

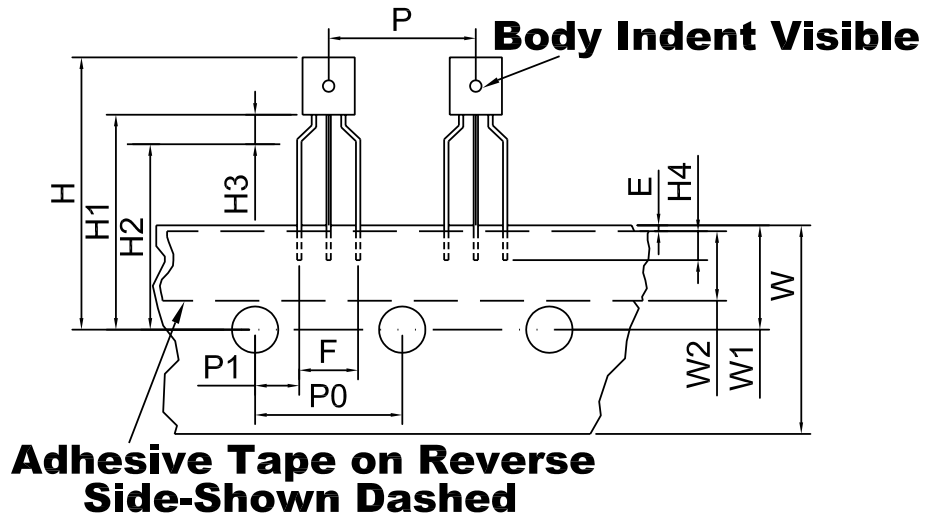

| SYMBOL | SPECIFICATIONS<br>(mm) | SPECIFICATIONS<br>(inch) |
|--------|------------------------|--------------------------|
| P      | 12.7 ± 1.0             | 0.50 ± 0.07              |
| P0     | 12.7 ± 1.0             | 0.50 ± 0.07              |
| P1     | 3.81 ± 0.4             | 0.15 ± 0.016             |
| H      | 21.0~26.0              | 0.828~1.024              |
| H1     | 17.0~21.0              | 0.669~0.828              |
| H2     | 14.0~18.0              | 0.551~0.709              |
| H3     | 3.4 max.               | 0.125 max.               |
| H4     | 2.5 min.               | 0.098 min.               |
| F      | 5.08 ± 0.2             | 0.2 ± 0.008              |
| W      | 18.0 ± 0.5             | 0.708 ± 0.020            |
| W1     | 9.0 ± 0.5              | 0.354 ± 0.020            |
| W2     | 6.0 ± 0.5              | 0.236 ± 0.020            |
| ΦD0    | 4.0 ± 0.2              | 0.157 ± 0.008            |
| E      | 0.5 max.               | 0.020 max.               |

Units: mm

\* All specs and applications shown above subject to change without prior notice.