
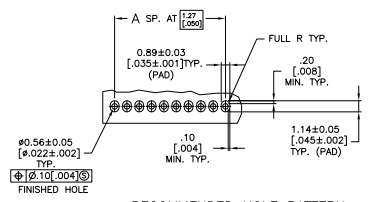
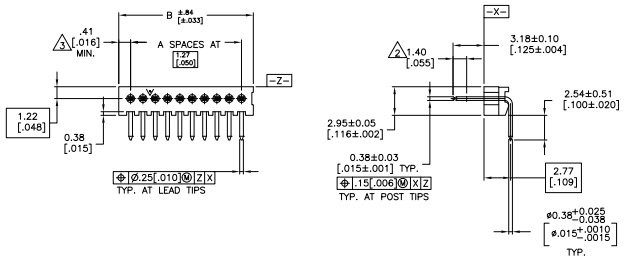


REV	DATE	DESCRIPTION	BY	CHK	APP
AD	39				
R4		REVISED PER EDD-11-004820			

- △ CONTACT AREA PLATED WITH .000762 [.000030] GOLD; SOLDER LEADS PLATED WITH .003810 [.00015] MIN TIN-LEAD; ALL OVER .001270 [.000050] MIN NICKEL
- △ POINT OF MEASUREMENT FOR PLATING THICKNESS
- △ THE NOTED DIMENSION APPLIES AT THE INTERSECTION OF THE POST AND HOUSING.
- △ CONTACT AREA PLATED WITH .000762 [.000030] GOLD; SOLDER LEADS PLATED WITH .003810 [.00015] MIN TIN; ALL OVER .001270 [.000050] MIN NICKEL
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI



RECOMMENDED HOLE PATTERN FOR MANUAL INSERTION

		39.75 [1.565]	30	31	△ 7-104186-0
	OBSOLETE	63.88 [2.515]	49	50	△ 6-104186-9
	OBSOLETE	57.53 [2.265]	44	45	△ 6-104186-8
△ 5	OBSOLETE	51.18 [2.015]	39	40	△ 6-104186-7
	OBSOLETE	44.83 [1.765]	34	35	△ 6-104186-6
	OBSOLETE	38.48 [1.515]	29	30	△ 6-104186-5
	OBSOLETE	34.67 [1.365]	26	27	△ 6-104186-4
△ 5	OBSOLETE	32.13 [1.265]	24	25	△ 6-104186-3
	OBSOLETE	28.32 [1.115]	21	22	△ 6-104186-2
	OBSOLETE	25.78 [1.015]	19	20	△ 6-104186-1
△ 5	OBSOLETE	21.97 [.865]	16	17	△ 6-104186-0
	OBSOLETE	19.43 [.765]	14	15	△ 5-104186-9
	OBSOLETE	16.89 [.665]	12	13	△ 5-104186-8
△ 5	OBSOLETE	15.62 [.615]	11	12	△ 5-104186-7
	OBSOLETE	13.08 [.515]	9	10	△ 5-104186-6
	OBSOLETE	10.54 [.415]	7	8	△ 5-104186-5
	OBSOLETE	9.27 [.365]	6	7	△ 5-104186-4
	OBSOLETE	8.00 [.315]	5	6	△ 5-104186-3
	OBSOLETE	6.73 [.265]	4	5	△ 5-104186-2
	OBSOLETE	5.46 [.215]	3	4	△ 5-104186-1
			B	A	NO OF POSN
					PART NUMBER

		39.75 [1.565]	30	31	△ 2-104186-0
	OBSOLETE	63.88 [2.515]	49	50	△ 1-104186-9
	OBSOLETE	57.53 [2.265]	44	45	△ 1-104186-8
△ 5	OBSOLETE	51.18 [2.015]	39	40	△ 1-104186-7
	OBSOLETE	44.83 [1.765]	34	35	△ 1-104186-6
△ 5	SUPERSEDED BY 6-104186-5	38.48 [1.515]	29	30	△ 1-104186-5
	OBSOLETE	34.67 [1.365]	26	27	△ 1-104186-4
△ 5	OBSOLETE	32.13 [1.265]	24	25	△ 1-104186-3
	OBSOLETE	28.32 [1.115]	21	22	△ 1-104186-2
	OBSOLETE	25.78 [1.015]	19	20	△ 1-104186-1
△ 5	OBSOLETE	21.97 [.865]	16	17	△ 1-104186-0
△ 5	SUPERSEDED BY 5-104186-9	19.43 [.765]	14	15	△ 104186-9
	OBSOLETE	16.89 [.665]	12	13	△ 104186-8
△ 5	OBSOLETE	15.62 [.615]	11	12	△ 104186-7
	OBSOLETE	13.08 [.515]	9	10	△ 104186-6
△ 5	SUPERSEDED BY 5-104186-5	10.54 [.415]	7	8	△ 104186-5
	OBSOLETE	9.27 [.365]	6	7	△ 104186-4
	OBSOLETE	8.00 [.315]	5	6	△ 104186-3
	OBSOLETE	6.73 [.265]	4	5	△ 104186-2
	OBSOLETE	5.46 [.215]	3	4	△ 104186-1
			B	A	NO OF POSN
					PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. DATE CLOSURE: 10-3-88

TE Connectivity

108-1093

HEADER ASSEMBLY, RIGHT ANGLE, UNSHROUDED, SINGLE ROW, AMPROOF® System 50

114-25031

100779

104186

DATE: 5-1 1 1 R4