

IEEE 1394 SFP (FireWire / i.Link)



Overview

MRV announces the first IEEE 1394b standard compliant SFP devices in the industry.

The SFP-1394 transceivers work at the physical network layer. Using bit-for-bit operations, they are transparent to other network devices. They support range extension, topology changes, fiber-to-copper media conversion, and a full range of data rates from 100 Mbps to 1600 Mbps.

FireWire is a "protocol of choice" for the aerospace and aviation industries, and it is widely used in aircraft subsystem inter-communication.

The SFP-1394 models provide three connector options: 6-pin, 4-pin, and LC optical. The optical model transmits up to 150 meters at a wavelength of 850 nanometers over 62.5-micron multi-mode optical fiber. The copper media is limited to the IEEE 1394 standard specifications.


Features and Benefits

- Data rate support:
Fiber - 100, 200, 400, 800, and 1600 Mbps
Copper - 100, 200, 400, and 800 Mbps
- Full transparency to other network nodes
- Three media connection models
- 6-pin (SFP-1394A)
- 4-pin (SFP-1394B)
- LC optical (SFP-FO-1394B)
- IEEE 1394b standard compliance
- MRV Media Cross Connect and Fiber Driver compatibility
- RoHS Directive: RoHS-5 compliant


Advantages

- Doubles the physical reach of FireWire and i.Link networks when used in a repeater configuration.
- Works with the MCC (Media Cross Connect) to simplify remote network topology changes for test automation.
- Allows the use of mixed fiber optic and copper infrastructures when used as a fiber-to-copper media converter.


Application A: Double the Network Reach

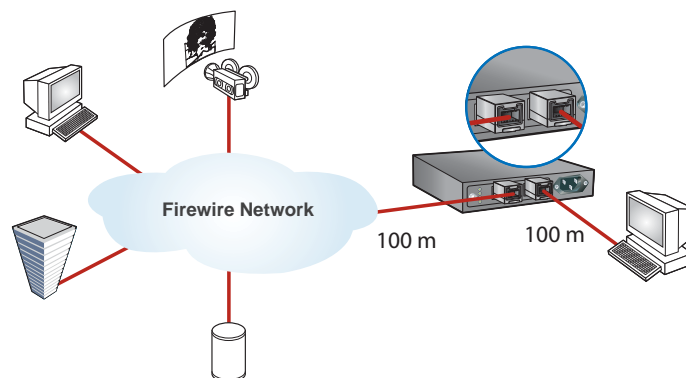

Application B: Remote Topology Changes for Better Automation

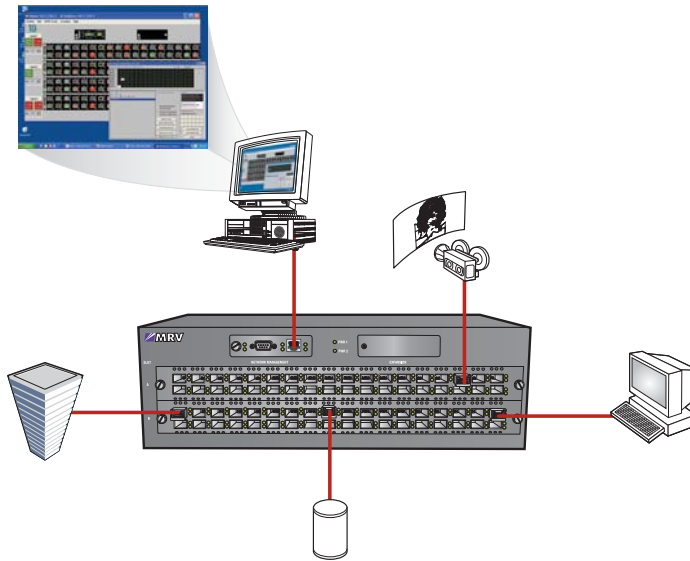

Application C: Mixed Copper/Fiber Infrastructures

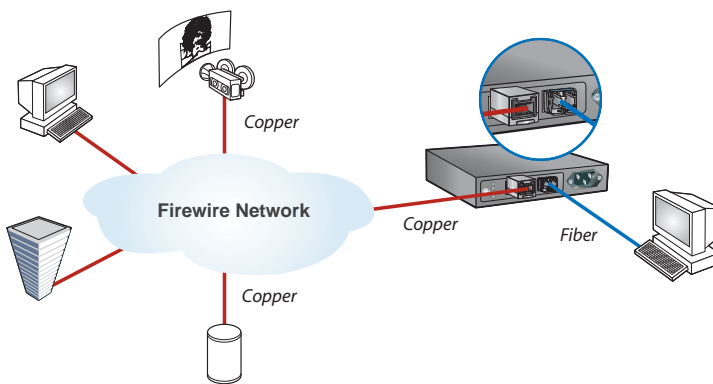

Ordering Information

Model	Description	Data Rate (Mbps)	Connectors	Supply Voltage (V)	Temperature Range (°C)
SFP-1394A	Firewire Copper SFP	100 - 800	Firewire type A (6-pin)	3.3	-5 to 70
SFP-1394B	Firewire Copper SFP	100 - 800	Firewire type B (4-pin)	3.3	-5 to 70

Ordering Information

Model	Description	Data Rate (Mbps)	Connectors	Wavelength		Output Power (dBm)		Min. Receiver Sensitivity (dBm)	Saturation (dBm)	Min. Link Budget (dB)	Supply Voltage (V)	Temperature Range (°C)	Min Range (m)
				Tx	Rx	Min	Max						
SFP-FO-1394B	Firewire Fiber SFP	100 - 1600	LC	850	850	-10	-5	-18	0	9	3.3	-5 to 70	100
SFP-F05-1394B	Firewire Fiber SFP	100 - 1600	LC	850	850	-10	-5	-18	0	9	3.3	-5 to 70	500

MRV has more than 50 offices throughout the world. Addresses, phone numbers, and fax numbers are listed at www.mrv.com. Please e-mail us at sales@mrv.com or call us for assistance.

MRV (West Coast USA)
 20415 Nordhoff St.
 Chatsworth, CA 91311
 800-338-5316
 818-773-0900

MRV (East Coast USA)
 295 Foster St.
 Littleton, MA 01460
 800-338-5316
 978-952-4700

MRV (International)
 Business Park Moerfelden
 Waldeckerstrasse 13
 64546 Moerfelden-Walldorf
 Germany
 Tel. (49) 6105/2070
 Fax. (49) 6105/207-100

All statements, technical information and recommendations related to the products herein are based upon information believed to be reliable or accurate. However, the accuracy or completeness thereof is not guaranteed, and no responsibility is assumed for any inaccuracies. Please contact MRV Communications for more information. MRV Communications and the MRV Communications logo are trademarks of MRV Communications, Inc. Other trademarks are the property of their respective holders.