

4


3

2



1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

REV	DATE	DESCRIPTION	BY	CHK	APP
AA	REV PER	063C-0464-03			

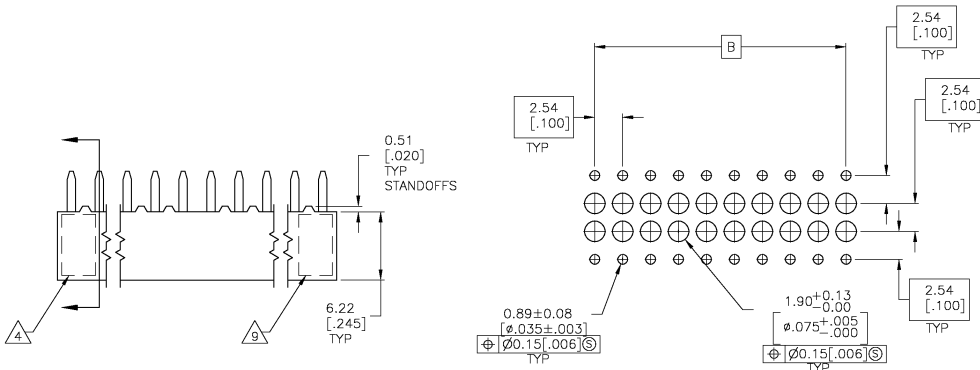

RECOMMENDED PC BOARD HOLE PATTERN
PC BOARD THICKNESS 1.57[.062]

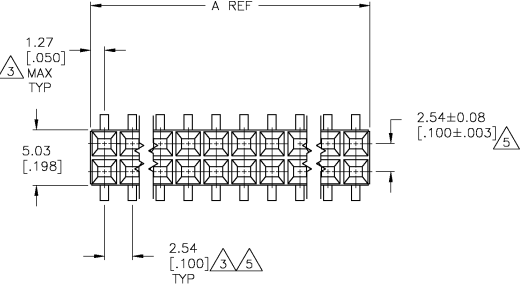

96.52[3.800]	99.06[3.900]	78	4-534267-0
91.44[3.600]	93.98[3.700]	74	3-534267-9
88.90[3.500]	91.44[3.600]	72	3-534267-8
86.36[3.400]	88.90[3.500]	70	3-534267-7
83.82[3.300]	86.36[3.400]	68	3-534267-6
81.28[3.200]	83.82[3.300]	66	3-534267-5
78.74[3.100]	81.28[3.200]	64	3-534267-4
76.20[3.000]	78.74[3.100]	62	3-534267-3
71.12[2.800]	73.66[2.900]	58	3-534267-2
68.58[2.700]	71.12[2.800]	56	3-534267-1
66.04[2.600]	68.58[2.700]	54	3-534267-0
63.50[2.500]	66.04[2.600]	52	2-534267-9
55.88[2.200]	58.42[2.300]	46	2-534267-8
53.34[2.100]	55.88[2.200]	44	2-534267-7
50.80[2.000]	53.34[2.100]	42	2-534267-6
45.72[1.800]	48.26[1.900]	38	2-534267-5
40.64[1.600]	43.18[1.700]	34	2-534267-4
38.10[1.500]	40.64[1.600]	32	2-534267-3
33.02[1.300]	35.56[1.400]	28	2-534267-2
25.40[1.000]	27.94[1.100]	22	2-534267-1
12.70[.500]	15.24[.600]	12	2-534267-0
17.78[.700]	20.32[.800]	16	1-534267-9
60.96[2.400]	63.50[2.500]	50	1-534267-8
2.54[.100]	5.08[.200]	4	1-534267-7
93.98[3.700]	96.52[3.800]	76	1-534267-6
43.18[1.700]	45.72[1.800]	36	1-534267-5
5.08[.200]	7.62[.300]	6	1-534267-4
35.56[1.400]	38.10[1.500]	30	1-534267-3
58.42[2.300]	60.96[2.400]	48	1-534267-1
20.32[.800]	22.86[.900]	18	1-534267-0
27.94[1.100]	30.48[1.200]	24	534267-9
73.66[2.900]	76.20[3.000]	60	534267-8
48.26[1.900]	50.80[2.000]	40	534267-7
30.48[1.200]	33.02[1.300]	26	534267-6
7.62[.300]	10.16[.400]	8	534267-5
99.06[3.900]	101.60[4.000]	80	534267-4
10.16[.400]	12.70[.500]	10	534267-3
22.86[.900]	25.40[1.000]	20	534267-2
15.24[.600]	17.78[.700]	14	534267-1

- △ HOUSING: FLAME RETARDANT, GLASS FILLED, THERMOPLASTIC, COLOR: BLACK. CONTACT: PHOSPHOR BRONZE.
- △ CONTACT: DUPLEX PLATED 0.76µm[.000030] GOLD IN CONTACT AREA, 3.81-7.62µm[.000150-.000300] BRIGHT TIN-LEAD ON LEADS, ALL OVER 1.27µm[.000050] NICKEL.
- △ THESE DIMENSIONS PERTAIN TO CAVITY CENTERLINES ONLY - NOT TO CONTACT LOCATIONS.
- △ PART NUMBER AND DATE CODE ARE MARKED IN APPROXIMATE LOCATION SHOWN.
- △ TOLERANCE IS NON-CUMULATIVE.
- △ 2 POSITION DATE CODE IS MARKED OPPOSITE SIDE OF TYCO LOGO.
- △ POINT-OF-MEASUREMENT DIMENSION FOR PLATING THICKNESS (INSIDE CONTACT BEAM).
- △ POINT-OF-CONTACT DIMENSION.
- △ TYCO TRADEMARK AND CSA LOGO ARE MOLDED INTO HOUSING, THIS LOCATION.
- △ NO PART NUMBER MARKING REQUIRED FOR THIS PART.

THIS DRAWING IS A CONTROLLED DOCUMENT. DRN: M.BINNER GENNO2002. Tyco Electronics Corporation, Harrisburg, PA 17105.

APPROVED BY: J. OLSON GENNO2002. NAME: J. OLSON GENNO2002. PRODUCT SPEC: 108-25022. POPULATION SPEC: 114-25018. SIZE: A2. DATE CODE: 00779. DRAWING NO: 534267. RESTRICTED TO: -.

MATERIAL: 1. FINISH: 2. WEIGHT: -.

CUSTOMER DRAWING. SCALE: 4:1. SHEET: 1 OF 1. REV: AA.