


DRAWING MADE IN THIRD ANGLE PROJECTION
 THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC		DIST		ZONE		LTR		REVISIONS		DATE	APPD
FT	22	P	F					E	REDRAWN PER 0010-0067-94	2/18/94	HR
								F	REV PER EC 0320-349-97	27 OCT 97	NS

1. RETAINING SPRINGS TO BE USED ON OPPOSITE SIDE OF CARD SLOT FOR SINGLE SIDED PC BOARD APPLICATIONS. USE 1 RETAINING SPRING PER 6 CRIMP STYLE CONTACTS, FOR EXAMPLE: 36 POSN-6 SPRINGS; 30 POSN-5 SPRINGS; 24 POSN-4 SPRINGS; 18 POSN-3 SPRINGS ETC...

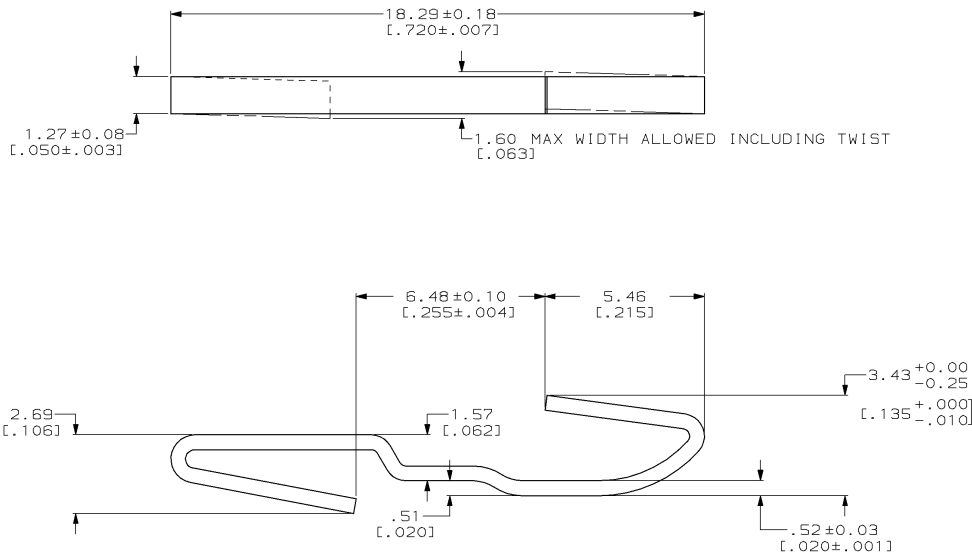

.000050 NICKEL ALL OVER	583691-4
.000010 GOLD OVER .000050 NICKEL	583691-3
UNPLATED	583691-2

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON + 2 PLC DEC # - 3 PLC DEC # .005 ANGLES ± -		DR 9-2-93 A. STAUB BG	AMP Incorporated Harrisburg, PA 17105-3608	
MATERIAL STAINLESS STEEL		CHK 2/18/94 H ROSE	NAME SPRING, RETAINER	
FINISH -		APPD 2/18/94 M THURMA	SIZE C 00779	DRAWING NO C-583691
APPLICATION SPEC -		APPD 2/18/94 M THURMA	SCALE 10:1	SHEET 1 OF 1
WEIGHT -		CUSTOMER DRAWING		

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

583691

A